
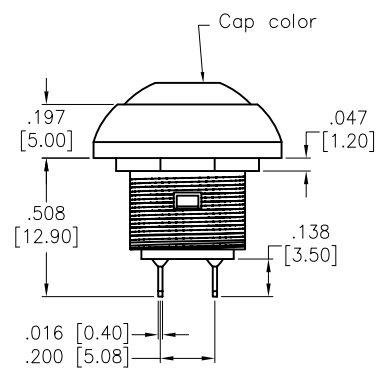
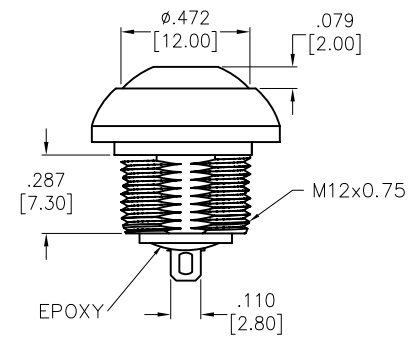
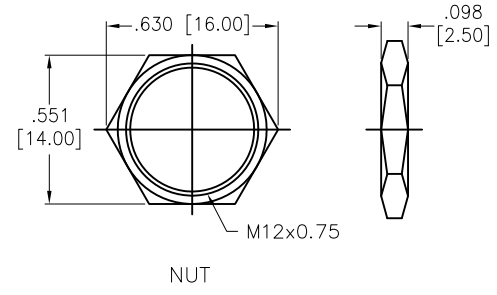






Rev	AWO #	Description	Date	Appr
-		RELEASED	2/18/21	
A		ADDED SPEC.	6/21/21	WX/RC

APPROVED: _____
DATE: _____ TITLE: _____



SW-PB11-1CSX-10

CAP COLOR
K=BLACK
R=RED
G=GREEN

SPECIFICATIONS:

Material:
Case: Dially Phthalate, rated UL 94V-0
Cap: Polyamide66, Color: See Chart
Bushing: Polyamide66
Terminal: Gold over Silver Plated
Electrical:
Rating: 400mA 32VAC
100mA 50VDC
125mA 125VAC
500mA 48VAC
200mA 50VDC
Contact resistance: 50 mΩ max
Insulation resistance: 1G-ohms min @500VDC
Dielectric withstanding voltage: 1,000 VAC For 1 Minute
Electrical Life: 500,000 Cycles
Temperature Rating:
Operating temperature: -30°C to +85°C
Environmental: **A**
IP67 front panel protection
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	LH	2/18/21	
CHECKED	AC	2/18/21	
APPROVED			

ADAM TECH		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
TITLE IP67 PUSH BUTTON SWITCH, SOLDER TYPE SPST, OFF-MOMENTARY, GOLD OVER SILVER PLATED			
SIZE X	PART NO. SW-PB11-1CSX-10	REV. A	
REF: S00198T	SCALE: NTS	SHEET 1 OF 1	