


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/17/21	

APPROVED: _____


DATE: _____ TITLE: _____

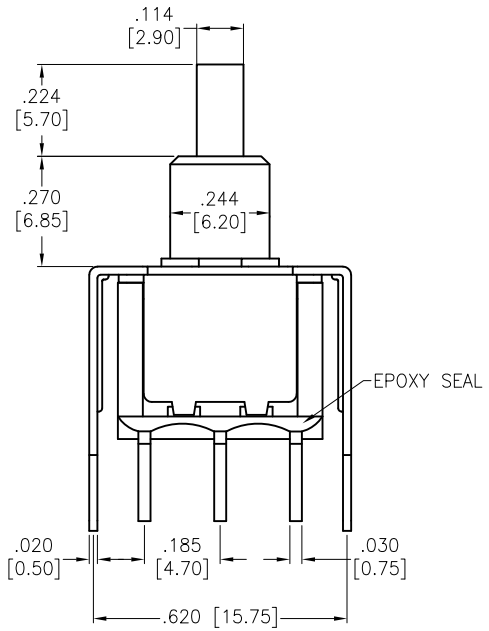


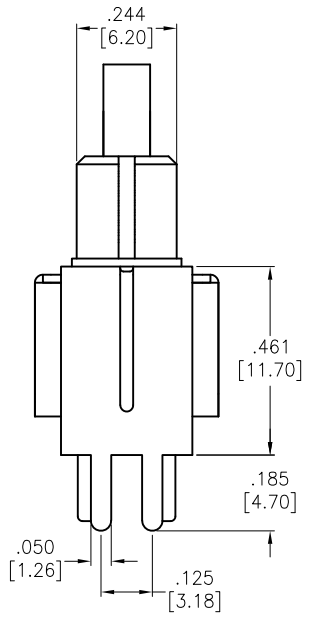

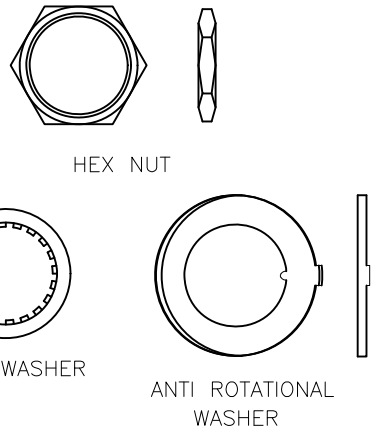


INCLUDED HARDWARE

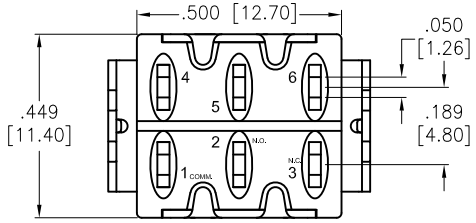

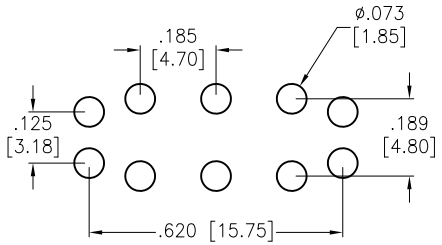

RECOMMENDED PCB LAYOUT



CIRCUIT DIAGRAM
(DPDT) ON–MOMENTARY

SPECIFICATIONS:
Material:
Movable Contact: Copper Alloy, Silver Plated
Terminal: Copper Alloy, Silver Plated
Electrical:
Voltage rating: 120VAC or 38VDC
Current rating: 1 Amps
Contact resistance: 10 mΩ max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500V RMS @Sea level
Temperature Rating:
Operating temperature: –30°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	2/17/21
CHECKED	AC	2/17/21
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SNAP-ACTING PUSH BUTTON SWITCH, VERTICAL, PCB TYPE
11.70 HEIGHT, DPDT, ON-MOMENTARY,SILVER PLATED

SIZE	PART NO.	REV.
X	SW-PB8-BB00B10QE-1	-

REF:	SCALE:	SHEET
S00198T	NTS	1 OF 1