
FEATURES

- **600ps max. propagation delay**
- **Extended 100E V_{EE} range of –4.2V to –5.5V**
- **True and complementary outputs**
- **OR/NOR function outputs**
- **Fully compatible with Industry standard 10KH, 100K I/O levels**
- **Internal 75KΩ input pulldown resistors**
- **Fully compatible with Motorola MC10E/100E104**
- **Available in 28-pin PLCC package**

DESCRIPTION

The SY10/100E104 are quint 2-input AND/NAND gates designed for use in new, high-performance ECL systems. The E104 also features a function output, F, which is the OR of all five AND gate outputs, while $\overline{F}$ is the NOR. Both true and complementary outputs are provided.


BLOCK DIAGRAM

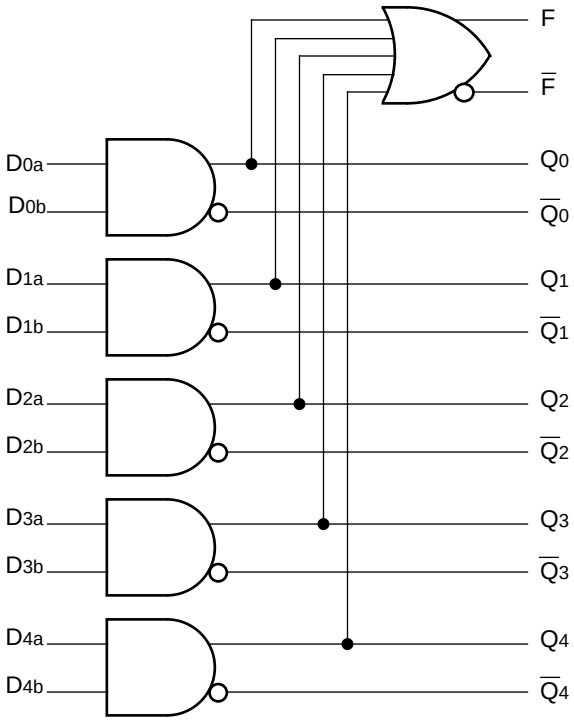

PIN NAMES

Pin	Function
D_{na}, D_{nb}	Data Inputs
Q_0-Q_4	AND Outputs
$\overline{Q}_0$-$\overline{Q}_4$	NAND Outputs
F	OR Output
$\overline{F}$	NOR Output
V_{CCO}	V_{CC} to Output

PACKAGE/ORDERING INFORMATION

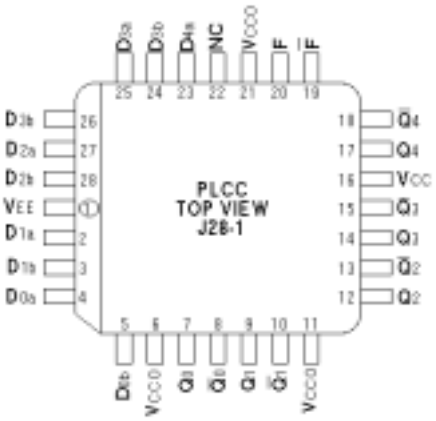

28-Pin PLCC (J28-1)

Ordering Information[1]

Part Number	Package Type	Operating Range	Package Marking	Lead Finish
SY10E104JI	J28-1	Industrial	SY10E104JI	Sn-Pb
SY10E104JITR[2]	J28-1	Industrial	SY10E104JI	Sn-Pb
SY100E104JI	J28-1	Industrial	SY100E104JI	Sn-Pb
SY100E104JITR[2]	J28-1	Industrial	SY100E104JI	Sn-Pb
SY10E104JC	J28-1	Commercial	SY10E104JC	Sn-Pb
SY10E104JCTR[2]	J28-1	Commercial	SY10E104JC	Sn-Pb
SY100E104JC	J28-1	Commercial	SY100E104JC	Sn-Pb
SY100E104JCTR[2]	J28-1	Commercial	SY100E104JC	Sn-Pb
SY10E104JY[3]	J28-1	Industrial	SY10E104JY with Pb-Free bar-line indicator	Matte-Sn
SY10E104JYTR[2, 3]	J28-1	Industrial	SY10E104JY with Pb-Free bar-line indicator	Matte-Sn
SY100E104JY[3]	J28-1	Industrial	SY100E104JY with Pb-Free bar-line indicator	Matte-Sn
SY100E104JYTR[2, 3]	J28-1	Industrial	SY100E104JY with Pb-Free bar-line indicator	Matte-Sn

Notes:

1. Contact factory for die availability. Dice are guaranteed at T_A = 25°C, DC Electricals only.
2. Tape and Reel.
3. Pb-Free package is recommended for new designs.

LOGIC EQUATION

$F = (D_{0a} \bullet D_{0b}) + (D_{1a} \bullet D_{1b}) + (D_{2a} \bullet D_{2b}) + (D_{3a} \bullet D_{3b}) + (D4a \bullet D_{4b})$

DC ELECTRICAL CHARACTERISTICS[1]

$V_{EE} = V_{EE}$ (Min.) to V_{EE} (Max.); $V_{CC} = V_{CCO} = GND$

Symbol	Parameter	$T_A = -40°C$			$T_A = 0°C$			$T_A = +25°C$			$T_A = +85°C$			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
I_{IH}	Input HIGH Current	—	—	200	—	—	200	—	—	200	—	—	200	µA
I_{EE}	Power Supply Current													mA
	10E	—	38	46	—	38	46	—	38	46	—	38	46	
	100E	—	38	46	—	38	46	—	38	46	—	44	53	

Note:

1. Specification for packaged product only.

AC ELECTRICAL CHARACTERISTICS[2]


$V_{EE} = V_{EE}$ (Min.) to V_{EE} (Max.); $V_{CC} = V_{CCO} = GND$

Symbol	Parameter	$T_A = -40°C$			$T_A = 0°C$			$T_A = +25°C$			$T_A = +85°C$			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
t_{PD}	Propagation Delay to													ps
	Output D to Q	225	385	600	225	385	600	225	385	600	225	385	600	
	D to F	500	725	1000	500	725	1000	500	725	1000	500	725	1000	
t_{skew}	Within-Device Skew, D to Q[1]	—	75	—	—	75	—	—	75	—	—	75	—	ps
t_r	Rise/Fall Time													ps
t_f	20% to 80% Q	275	425	700	275	425	700	275	425	700	275	425	700	
	F	300	475	700	300	475	700	300	475	700	300	475	700	

Notes:

1. Within-device skew is defined as identical transitions on similar paths through a device.
2. Specification for packaged product only.

28-PIN PLCC (J28-1)

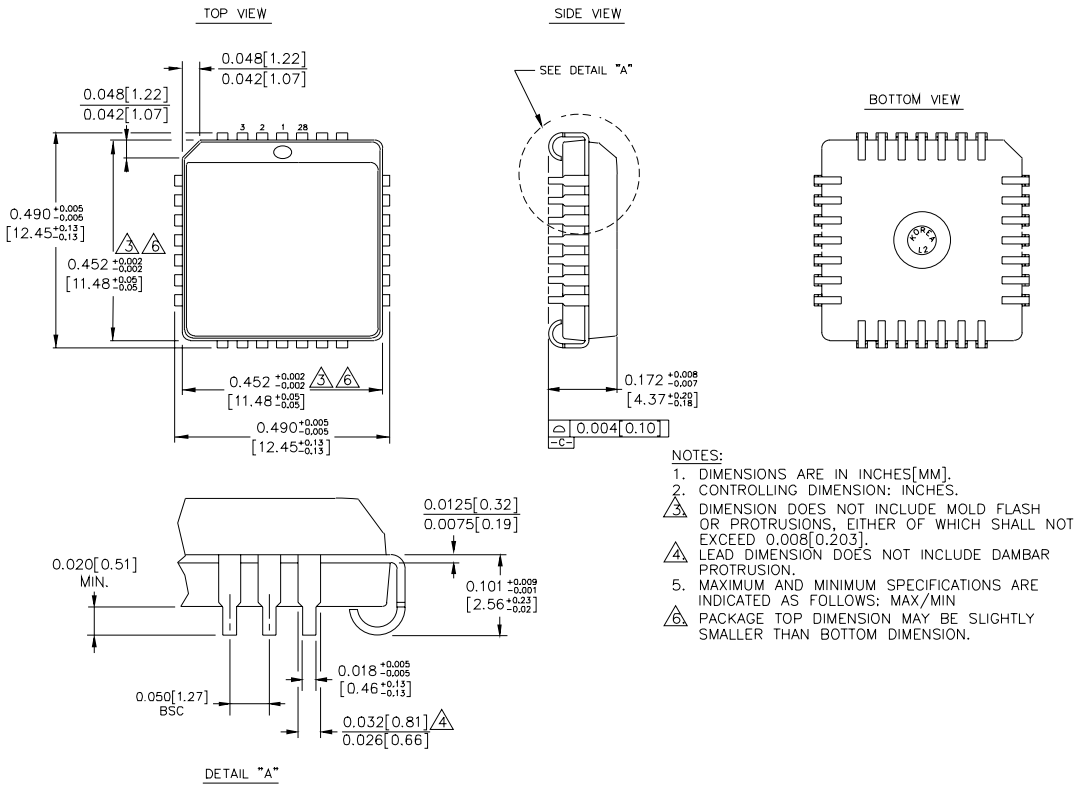

NOTES:
1. DIMENSIONS ARE IN INCHES[MM].
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.008[0.203].
4. LEAD DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION.
5. MAXIMUM AND MINIMUM SPECIFICATIONS ARE INDICATED AS FOLLOWS: MAX/MIN
6. PACKAGE TOP DIMENSION MAY BE SLIGHTLY SMALLER THAN BOTTOM DIMENSION.

Rev. 03

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB http://www.micrel.com

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.