
Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

Phase Control SCR
1200 Amperes Average
2400 Volts

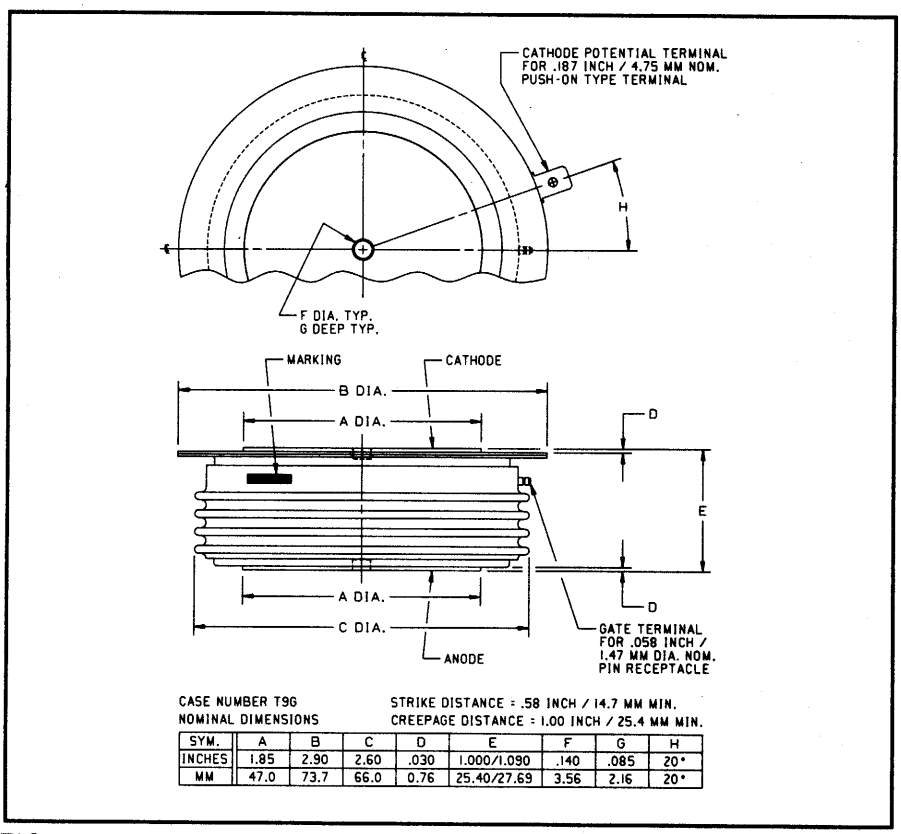


CASE NUMBER T9G
NOMINAL DIMENSIONS

STRIKE DISTANCE = .58 INCH / 14.7 MM MIN.
CREEPAGE DISTANCE = 1.00 INCH / 25.4 MM MIN.

SYM.	A	B	C	D	E	F	G	H
INCHES	1.85	2.90	2.60	.030	1.000/1.090	.140	.085	20°
MM	47.0	73.7	66.0	0.76	25.40/27.69	3.56	2.16	20°

T9G0 1200A (Outline Drawing)

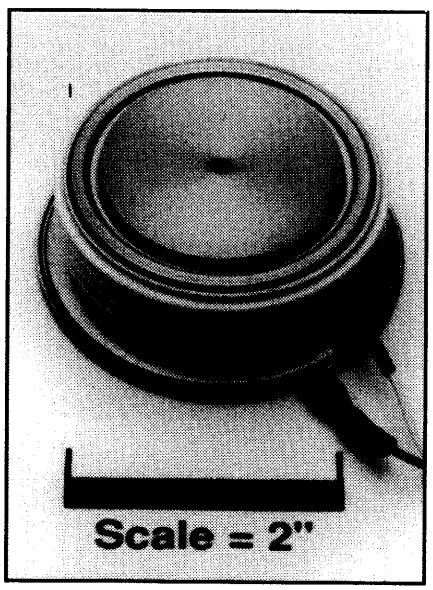

T9G0 1200A Phase Control SCR
1200 Amperes Average, 2400 Volts

Description:
Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak, hermetic Pow-R-Disc devices employing the field proven amplifying gate.

Features:
- ☐ Low On-State Voltage
- ☐ High di/dt Capability
- ☐ High dv/dt Capability
- ☐ Hermetic Packaging
- ☐ Excellent Surge and I^2t Ratings

Applications:
- ☐ Power Supplies
- ☐ Motor Control

Ordering Information:
Select the complete 12 digit part number you desire from the table below.

Type	Voltage V_{DRM}/V_{RRM} (Volts)	Current $I_{T(av)}$ (A)	Turn-off t_q (µsec)	Gate Current I_{GT} (mA)	Lead Code
T9G0	02 through 24	12	0	3	DH
	200V through 2400V	1200A	350µsec (Typical)	200mA	12"

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

T9G0 1200A
Phase Control SCR
1200 Amperes Average, 2400 Volts

Absolute Maximum Ratings

Characteristics	Symbol	T9G0 1200A	Units
Non-repetitive Transient Peak Reverse Voltage	V_{RSM}	V_{RRM} + 100V	Volts
RMS On-state Current, T_C = 85°C	$I_{T(rms)}$	1880	Amperes
Average Current 180° Sine Wave, T_C = 85°C	$I_{T(av)}$	1200	Amperes
RMS On-state Current, T_C = 55°C	$I_{T(rms)}$	2790	Amperes
Average Current 180° Sine Wave, T_C = 55°C	$I_{T(av)}$	1780	Amperes
Peak One Cycle Surge On-state Current (Non-repetitive) 60Hz	I_{tsm}	27000	Amperes
Peak One Cycle Surge On-state Current (Non-repetitive) 50Hz	I_{tsm}	24650	Amperes
Critical Rate-of-rise of On-state Current (Non-repetitive)	di/dt	300	A/µsec
Critical Rate-of-rise of On-state Current (Repetitive)	di/dt	150	A/µsec
I^2t (for Fusing) for One Cycle, 60Hz	I^2t	3,040,000	A^2sec
Peak Gate Power Dissipation	P_{GM}	16	Watts
Average Gate Power Dissipation	$P_{G(av)}$	3	Watts
Operating Temperature	T_j	-40 to +125°C	°C
Storage Temperature	T_{stg}	-40 to +150°C	°C
Approximate Weight		1	lb.
		454	g
Mounting Force		5000 to 5500	lb.
		2270 to 2500	kg.

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

T9G0 1200A
Phase Control SCR
1200 Amperes Average, 2400 Volts

Electrical Characteristics, T_j = 25°C Unless Otherwise Specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Repetitive Peak Reverse Leakage Current	I_{RRM}	T_j = 125°C, $V_R = V_{RRM}$			75	mA
Repetitive Peak Forward Leakage Current	I_{DRM}	T_j = 125°C, $V_D = V_{DRM}$			75	mA
Peak On-state Voltage	V_{TM}	I_{TM} = 1500A Peak Duty Cycle < 0.1%			1.35	Volts
Threshold Voltage, Low-level	$V_{(TO)1}$	T_j = 125°C, I = 15%, $I_{T(av)}$ to $\pi I_{T(av)}$			0.60559	Volts
Slope Resistance, Low-level	r_{T1}				0.2681	mΩ
Threshold Voltage, High-level	$V_{(TO)2}$	T_j = 125°C, I = $\pi I_{T(av)}$ to I_{TSM}			0.64284	Volts
Slope Resistance, High-level	r_{T2}				0.1906	mΩ
V_{TM} Coefficients, Low-level		T_j = 125°C, I = 15% $I_{T(av)}$ to $\pi I_{T(av)}$				
					A_1 = -0.55126	
					B_1 = 0.21303	
					C_1 = 1.433E-04	
					D_1 = -0.003097	
V_{TM} Coefficients, High-level		T_j = 125°C, I = $\pi I_{T(av)}$ to I_{TSM}				
					A_1 = -62.5287	
					B_1 = 10.457	
					C_1 = 0.001238	
					D_1 = -0.43650	
Typical Turn-on Time	t_{on}	I_{TM} = 1000A, V_D =450V		3		µsec
Typical Turn-off Time	t_q	T_j = 125°C, I_T = 250A, di_R/dt = 50A/µsec Reapplied dv/dt = 20V/µsec Linear to 80% V_{DRM}		350		µsec
Minimum Critical dv/dt - Exponential to $V_{DRN=M}$	dv/dt	T_j = 125°C	300			V/µsec
Gate Trigger Current	I_{GT}	T_j = 25°C, V_D = 12V			200	mA
Gate Trigger Voltage	V_{GT}	T_j = 25°C, V_D = 12V			3.0	Volts
Non-Triggering Gate Voltage	V_{GDM}	T_j = 125°C, $V_D = V_{DRM}$			0.15	Volts
Peak Forward Gate Current	I_{GTM}				4	A
Peak Reverse Gate Voltage	V_{GRM}				5	Volts


Thermal Characteristics

Maximum Thermal Resistance, Double Sided Cooling						
Junction-to-Case	$R_{\theta(j-c)}$				0.023	°C/W
Case-to-Sink	$R_{\theta(c-s)}$				0.0075	°C/W


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

T9G0 1200A
Phase Control SCR
1200 Amperes Average, 2400 Volts


Maximum On-State Forward Voltage Drop
(Tj = 125 °C)

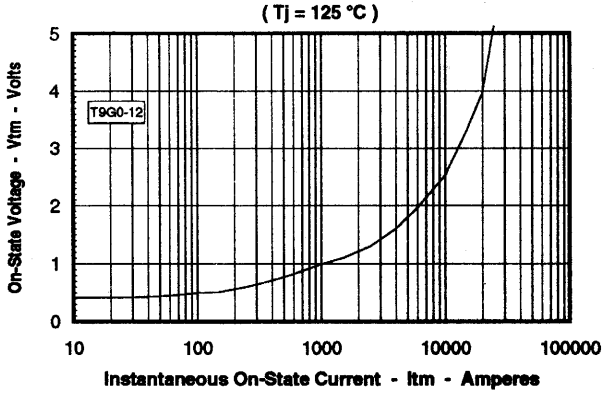


Maximum Transient Thermal Impedance
(Junction to Case)

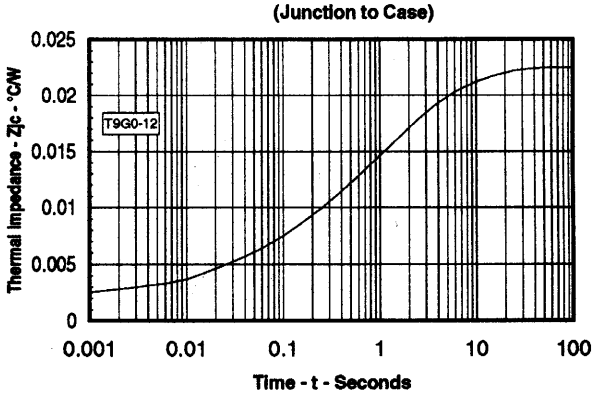


Maximum On-State Power Dissipation
(Sinusoidal Waveform)

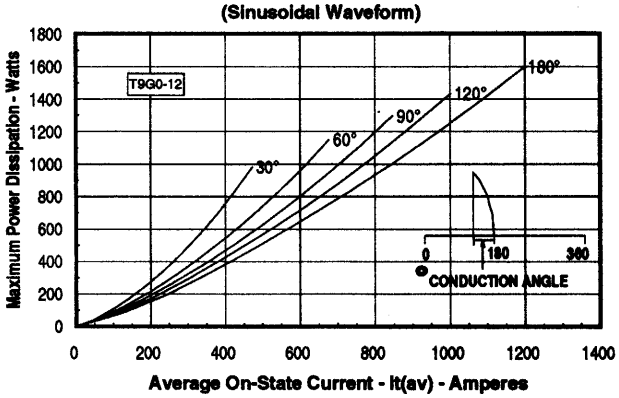

Maximum Allowable Case Temperature
(Sinusoidal Waveform)

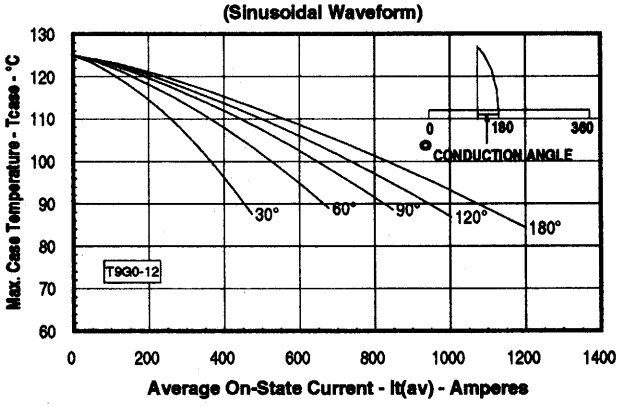

Maximum On-State Power Dissipation
(Rectangular Waveform)

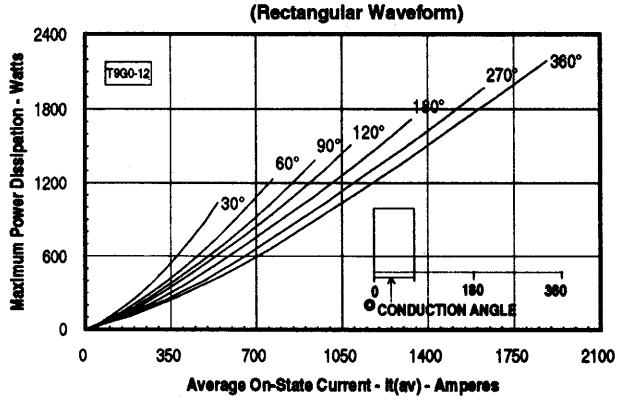

Maximum Allowable Case Temperature
(Rectangular Waveform)

