
60A. TERMINAL TP60





TP60L - 37.2mm spindle length
CL159791 - TP60L Black Nickel Plated
CL159793 - TP60L Red Nickel Plated

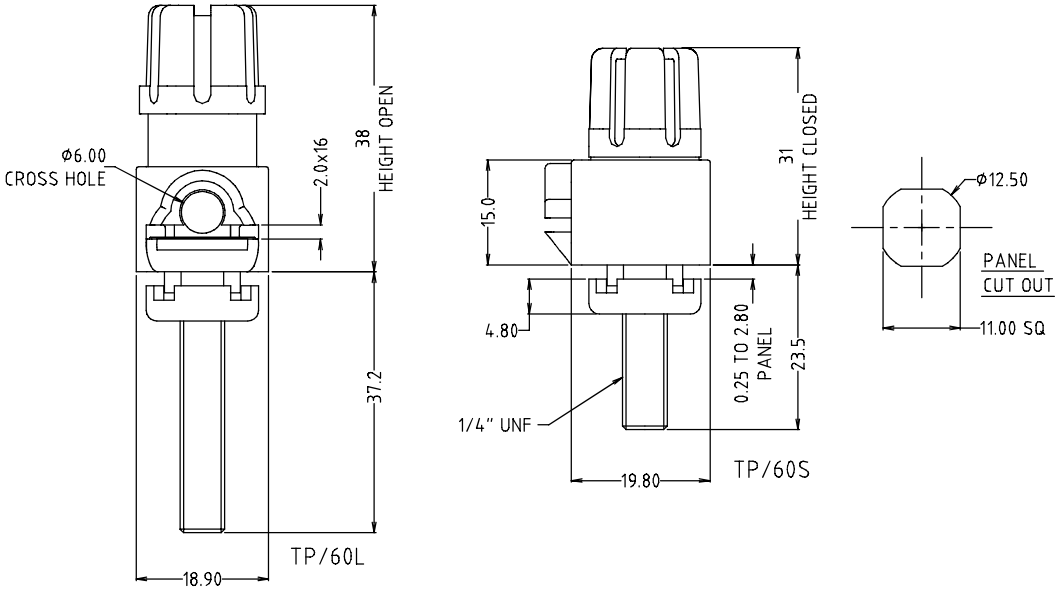

TP60S - 23.5mm spindle length
CL159797 - TP60S Black Nickel Plated
CL159798 - TP60S Red Nickel Plated



TP60C/SG - 23.5mm spindle length, 3mm slot
CL159801 - TP60C/SG Clear/Red Gold Plated
CL159802 - TP60C/SG Clear/Black Gold Plated


© CLIFF 02/2024 ISS.6

For further information, contact sales@cliffuk.co.uk

Cliff Electronic Components Limited,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012

www.cliffuk.co.uk

✓RoHS

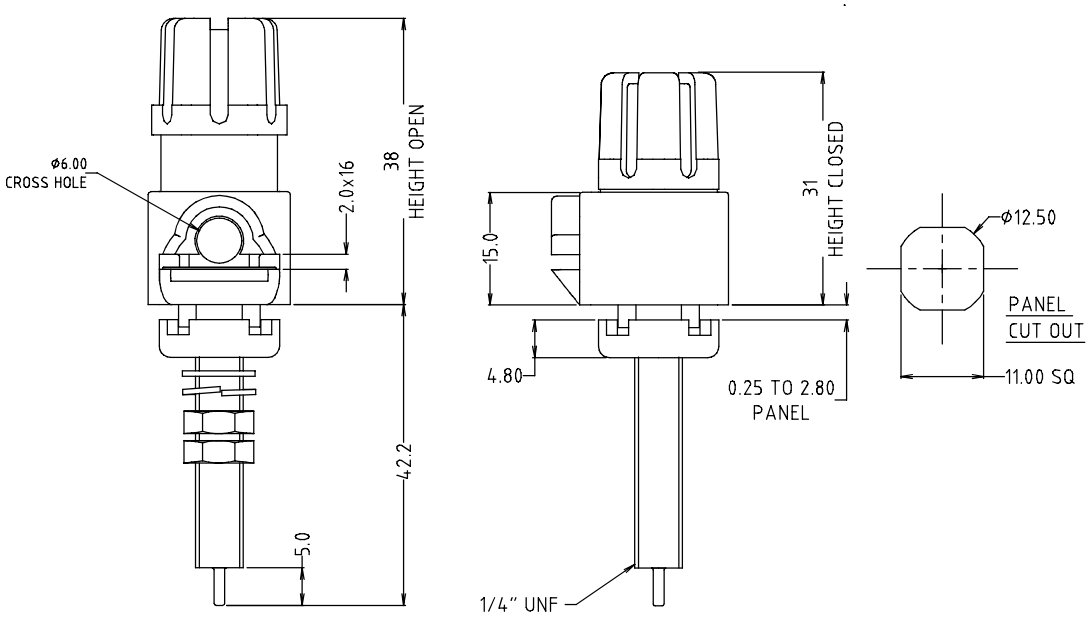



TP60P - PC Mounting
CL159791P - TP60P Black Nickel Plated
CL159791PA - T60P Black Nickel. Suppled assembled
CL159791PG - TP60P Black Gold Plated
CL159793P - TP60P Red Nickel Plated
CL159793PA - T60P Red Nickel. Suppled assembled.
CL159793PG - TP60P Red Gold Plated

Specification

Maximum Current: 60A.
Contact Resistance: Nickel <30mΩ, Gold <20mΩ
Temperature Rating: -20°C to +80°C
Flammability: Minimum UL 94HB

For further information, contact sales@cliffuk.co.uk

Cliff Electronic Components Limited,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012

www.cliffuk.co.uk

✓RoHS