
# Metal Foil Current Sense Resistors, Very High Power (to 2 W)

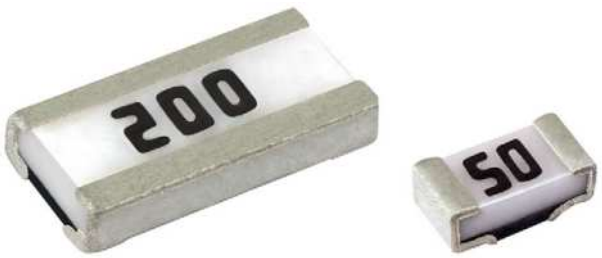


## FEATURES

- Ultra low sensing resistance minimizes power dissipation, improving efficiency
- Wide side terminal construction (0508 and 0612) for lower ESL
- High power to foot print size ratio (2 W in 0612 and 0.5 W in 0508)
- Sulfur resistant
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Pb-free
RoHS COMPLIANT
HALOGEN FREE
GREEN (5-2008)

## APPLICATIONS

- Switching power supply
- Voltage regulation module
- DC/DC converter, adaptor, battery pack, charger
- Pad and cell phone
- Power management

## STANDARD ELECTRICAL SPECIFICATIONS

| GLOBAL MODEL | SIZE | POWER RATING W | TOLERANCE % | RESISTANCE VALUE RANGE Ω | WEIGHT (typical) g/1000 pieces |
|---|---|---|---|---|---|
| WFCP0402 | 0402 | 0.25 | ± 1, ± 2, ± 5 | 0.0025 to 0.05 | 1.1 |
| WFCP0508 | 0508 | 0.5 | ± 1, ± 2, ± 5 | 0.005 to 0.03 | 6.8 |
| | 0508 | 1.0 | ± 1, ± 2, ± 5 | 0.001 to 0.004 | 6.8 |
| WFCP0603 | 0603 | 0.5 | ± 1, ± 2, ± 5 | 0.002 to 0.04 | 3.3 |
| WFCP0612 | 0612 | 1.0 | ± 1, ± 2, ± 5 | 0.0051 to 0.03 | 14.7 |
| | 0612 | 2.0 | ± 1, ± 2, ± 5 | 0.001 to 0.005 | 14.7 |

## GLOBAL PART NUMBER INFORMATION

**Global Part Numbering Example: WFCP1206R0100FE66**

| W | F | C | P | 1 | 2 | 0 | 6 | R | 0 | 1 | 0 | 0 | F | E | 6 | 6 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

| GLOBAL MODEL (4 digits) | CASE SIZE (EIA) (4 digits) | RESISTANCE VALUE (5 digits) (1) | TOLERANCE CODE (1 digit) | PACKAGING CODE (3 digits) |
|---|---|---|---|---|
| **WFCP** | **0402**<br>**0508**<br>**0603**<br>**0612** | **L** = mΩ (2)<br>**R** = decimal<br>**5L000** = 0.005 Ω<br>**R0100** = 0.01 Ω | **F** = ± 1.0 %<br>**G** = ± 2.0 %<br>**J** = ± 5.0 % | **E66** = lead (Pb)-free 7" tape/reel |

**Notes**

(1) Resistance values are available per E12 and E24 decades; www.vishay.com/doc?28372

(2) Use "L" for resistance values < 0.01 Ω



For technical questions, contact: ww2bresistors@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

## TECHNICAL SPECIFICATIONS

| PARAMETER | UNIT | RESISTOR CHARACTERISTICS | | | |
|---|---|---|---|---|---|
| | | WFCP0402 | WFCP0508 | WFCP0603 | WFCP0612 |
| Temperature coefficient | ppm/°C | ± 100 for 5.1 mΩ to 50 mΩ | ± 75 for 5 mΩ to 30 mΩ | ± 75 for 10 mΩ to 40 mΩ | ± 75 for 5.1 mΩ to 30 mΩ |
| | | ± 150 for 2.5 mΩ to 5 mΩ | ± 150 for 1 mΩ to 4 mΩ | ± 100 for 2 mΩ to 9 mΩ | ± 100 for 1 mΩ to 5 mΩ |
| Operating temperature range | °C | -55 to +170 | | | |
| Maximum working voltage | V | $(P \times R)^{1/2}$ | | | |
| Maximum element temperature | °C | 170 | | | |

## DIMENSIONS in inches (millimeters)

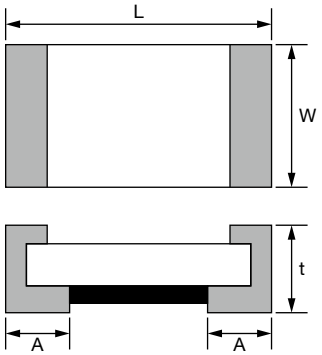



Fig. 1






Fig. 2

| TYPE (INCH SIZE) | RESISTANCE RANGE (mΩ) | DIMENSIONS (in millimeters) | | | | DIMENSIONS FIG. | MARKING |
|---|---|---|---|---|---|---|---|
| | | L | W | t | A | | |
| WFCP0402 | 3 | 1.00 ± 0.15 | 0.55 ± 0.15 | 0.40 ± 0.15 | 0.35 ± 0.15 | 2 | No marking |
| | 3.1 to 8 | 1.00 ± 0.10 | 0.55 ± 0.10 | 0.45 ± 0.10 | 0.35 ± 0.10 | 1 | |
| | 8.1 to 50 | | | | 0.25 ± 0.10 | 1 | |
| WFCP0508 | 1 to 5 | 1.35 ± 0.30 | 2.00 ± 0.20 | 0.45 ± 0.15 | 0.40 ± 0.25 | 2 | 3 digits (ex.: 005) |
| | 5.1 to 30 | 1.30 ± 0.20 | | 0.60 ± 0.20 | 0.30 ± 0.25 | 1 | |
| WFCP0603 | 2 to 9.9 | 1.60 ± 0.15 | 0.80 ± 0.15 | 0.55 ± 0.15 | 0.55 ± 0.20 | 1 | 2 digits (ex.: 05) |
| | 10 to 40 | | | | 0.35 ± 0.20 | 1 | |
| WFCP0612 | 1 to 5 | 1.60 ± 0.20 | 3.20 ± 0.20 | 0.75 ± 0.25 | 0.30 ± 0.25 | 2 | 3 digits (ex.: 005) |
| | 5.1 to 30 | | | 0.60 ± 0.20 | | 1 | |

## DERATING




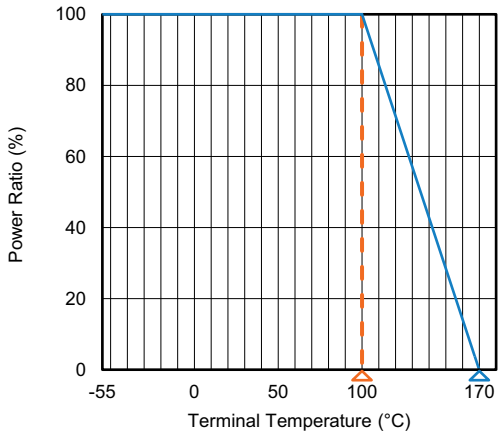


For technical questions, contact: ww2bresistors@vishay.com


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

## PERFORMANCES
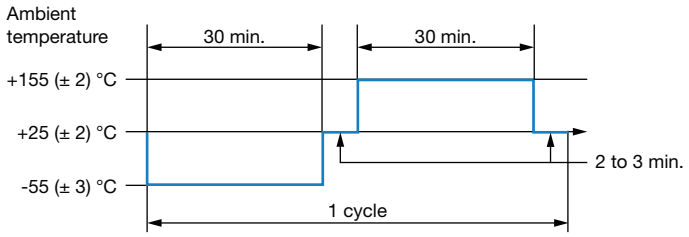
| ENVIRONMENTAL PERFORMANCE | | | |
|---|---|---|---|
| **NO.** | **ITEM** | **TEST CONDITION** | **SPECIFICATION** |
| 1 (1) | Short time overload | 5 times rated power for 5 seconds (JIS-C5202-5.5) | $\Delta R$: ± (1 % + 0.0005 Ω) |
| 2 | Temperature coefficient of resistance (TCR) | +25 °C / +125 °C (JIS-C5202-5.2)<br>$TCR\ (ppm/°C) = \frac{\Delta R}{R \times \Delta t} \times 10^6$ | Refer to Electrical Specification |
| 3 | Damp heat with load | The specimens shall be placed in a chamber and subjected to a relative humidity of 90 % to 95 % and a temperature of 40 °C ± 2 °C for the period of 1000 hours with applying rated power 1.5 hours ON and 0.5 hour OFF. (MIL-STD-202, method 103) | $\Delta R$: ± (1 % + 0.0005 Ω) |
| 4 | High temperature exposure | The chip (mounted on board) is exposed in the heat chamber 125 °C ± 3 °C for 1000 hours. (JIS-C5202-7.2) | $\Delta R$: ± (1 % + 0.0005 Ω) |
| 5 | Load life | Apply rated power at 70 °C ± 2 °C for 1000 hours with 1.5 hours ON and 0.5 hour OFF. (JIS-C5202-7.10) | $\Delta R$: ± (1 % + 0.0005 Ω) |
| 6 | Rapid change of temperature | The chip (mounted on board) is exposed, -55 °C ± 3 °C (30 min.) / +155 °C ± 2 °C (30 min.) for 5 cycles. The following conditions as the following figure. (JIS-C5202-7.4)<br> | $\Delta R$: ± (1 % + 0.0005 Ω) |


**Note**

(1) WFCP0612 short term overload is 3 times for 5 seconds
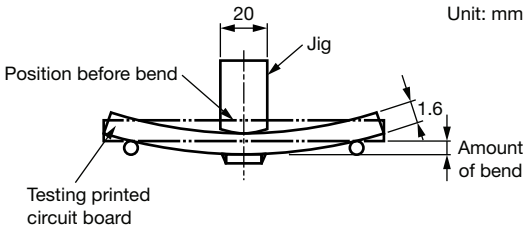
| FUNCTION PERFORMANCE | | | |
|---|---|---|---|
| **NO.** | **ITEM** | **TEST CONDITION** | **SPECIFICATION** |
| 1 | Bending strength | Mount the chip to test substrate. Apply pressure in direction of arrow unit band width reaches 2 mm (+0.2 / -0 mm) illustrated in the figure below and hold for 10 s ± 1 s. (JIS-C5202-6.1)<br> | $\Delta R$: ± (1 % + 0.0005 Ω) |
| 2 | Solvent resistance | Complete immersion of specimens in isopropyl alcohol for 3 (+5, -0) min. 25 °C ± 5 °C. (MIL-STD-202, method 215) | Verify marking permanency. (not required for laser etched parts or parts with no marking) |
| 3 | Resistance to solder heat | The specimen chip shall be immersed into the flux specified in the solder bath 260 °C ± 5 °C for 10 s ± 1 s. (MIL-STD-202, method 210) | $\Delta R$: ± (1 % + 0.0005 Ω) |


For technical questions, contact: ww2bresistors@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

## FUNCTION PERFORMANCE
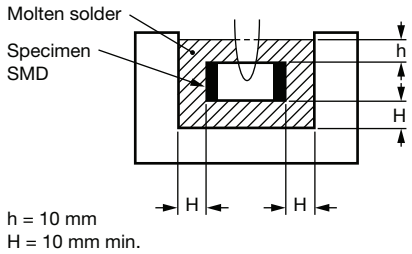
| NO. | ITEM | TEST CONDITION | SPECIFICATION |
|---|---|---|---|
| 4 | Solderability | The specimen chip shall be immersed into the flux specified in the solder bath 235 °C ± 5 °C for 2 s ± 0.5 s. It shall be immersed to a point 10 mm from its root. (Sn96.5 / Ag3.0 / Cu0.5) (JIS-C5 202-6.11)   | Solder shall be covered 95 % or more of the electrode area. |

**Notes**

- The surface temperature of component should below 100 °C
- 0.5 W with total solder pad trace size of 100 $mm^2$
- 1.0 W with total solder pad trace size of 150 $mm^2$
- 2.0 W with total solder pad trace size of 300 $mm^2$
- 3.0 W with total solder pad trace size of 450 $mm^2$


## TAPE PACKAGING SPECIFICATIONS

| MODEL | REEL | | |
|---|---|---|---|
| | TAPE WIDTH | DIAMETER | PIECES / REEL |
| WFCP0402 | Embossed paper tape | 178 mm / 7" | 10 000 |
| WFCP0508<br>WFCP0603<br>WFCP0612 | Embossed paper tape | 178 mm / 7" | 5000 |

**Note**

- Embossed carrier tape per EIA (EIAJ)

## PAPER TAPE SPECIFICATIONS

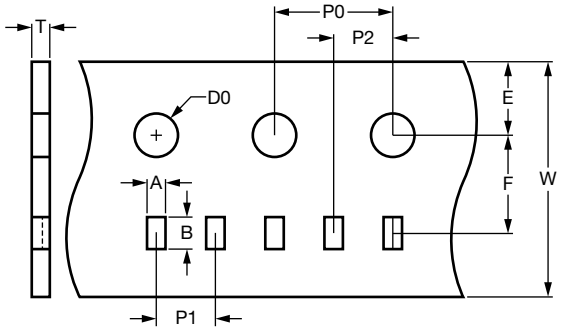


| TYPE | CARRIER DIMENSIONS (in millimeters) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | A | B | E | F | W | P0 | P1 | P2 | D0 | T |
| WFCP0402 | 0.7 ± 0.05 | 1.2 ± 0.05 | 1.75 ± 0.1 | 3.5 ± 0.05 | 8.0 ± 0.2 | 4.0 ± 0.1 | 2.0 ± 0.1 | 2.0 ± 0.05 | 1.55 ± 0.05 | 0.6 ± 0.1 |
| WFCP0508 | 1.6 ± 0.1 | 2.4 ± 0.1 | 1.75 ± 0.1 | 3.5 ± 0.05 | 8.0 ± 0.2 | 4.0 ± 0.1 | 4.0 ± 0.1 | 2.0 ± 0.05 | 1.55 ± 0.05 | 0.97 ± 0.1 |
| WFCP0603 | 1.1 ± 0.1 | 1.8 ± 0.1 | 1.75 ± 0.1 | 3.5 ± 0.05 | 8.0 ± 0.2 | 4.0 ± 0.1 | 4.0 ± 0.1 | 2.0 ± 0.05 | 1.55 ± 0.05 | 0.70 ± 0.1 |
| WFCP0612 | 2.0 ± 0.1 | 3.6 ± 0.1 | 1.75 ± 0.1 | 3.5 ± 0.05 | 8.0 ± 0.2 | 4.0 ± 0.1 | 4.0 ± 0.1 | 2.0 ± 0.05 | 1.55 ± 0.05 | 0.97 ± 0.1 |

**Notes**

- Embossed carrier tape per EIA (EIAJ)
- Additional packaging details at www.vishay.com/doc?20051




For technical questions, contact: ww2bresistors@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

## STORAGE CONDITIONS

Temperature: 5 °C to 35 °C, humidity: 40 % to 75 %

## RECOMMENDED SOLDER PAD LAYOUT




| TYPE | PAD LAYOUT DIMENSIONS (in millimeters) | | |
|---|---|---|---|
| | a | b | c |
| 0402 (8 mΩ to 50 mΩ) | 0.50 | 0.50 | 0.60 |
| 0402 (2.5 mΩ to 7 mΩ) | 0.30 | 0.60 | 0.60 |
| 0508 (1 mΩ to 30 mΩ) | 0.50 | 1.30 | 2.60 |
| 0603 (2 mΩ to 9 mΩ) | 0.60 | 0.90 | 1.00 |
| 0603 (9.1 mΩ to 40 mΩ) | 0.90 | 0.70 | 1.00 |
| 0612 (5.1 mΩ to 30 mΩ) | 0.60 | 1.30 | 3.60 |
| 0612 (1 mΩ to 5 mΩ) | 0.60 | 1.30 | 3.80 |

**Note**

- Recommend to use the steel plate which thickness > 100 µm to avoid the insufficient solder height

## SOLDERING RECOMMENDATIONS

- Peak reflow temperatures and durations:
  - IR reflow peak = 260 °C max. for 10 s
  - Wave solder = 260 °C max. for 10 s
- Compatible with lead and lead (Pb)-free solder reflow processes
- Recommended IR reflow profile for surface mount devices: www.vishay.com/doc?31052


For technical questions, contact: ww2bresistors@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

# Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

*© 2026 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED*



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000