




SIGN	DATE	DESCRIPTION	APPROVER
1	2/06'06	Part No. changed	Tony
2	03/17'09	Add stipulation	Seamus
3	03/17'09	Dimension is changed	Seamus
4	06/04`11	Critical dimension is changed.	Tason
5	06/04`11	The Wire Range is changed from 20-12AWG to 22-12AWG	Tason
6	06/04`11	The tolerance table is changed.	Tason
7	11/27'12	Change the screw plating specification	Jacky
8	11/27'12	Change the dimension from1.20 to1.10	Jacky
9	12/03'13	Change the withatand voltage and current	Jacky
10	12/03'13	Add the View	Jacky
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

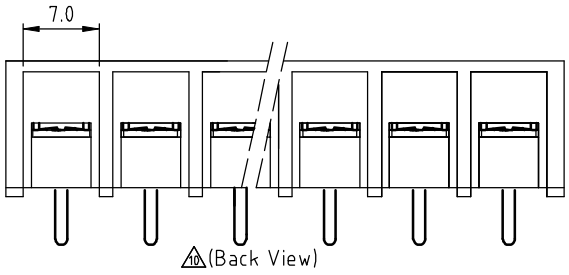

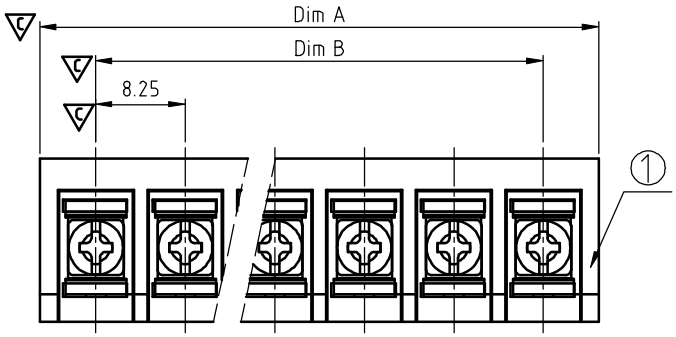

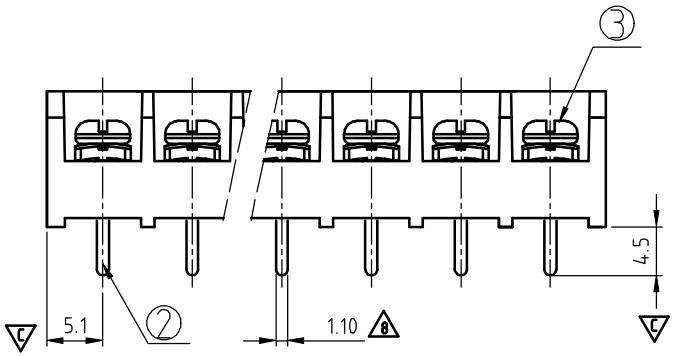

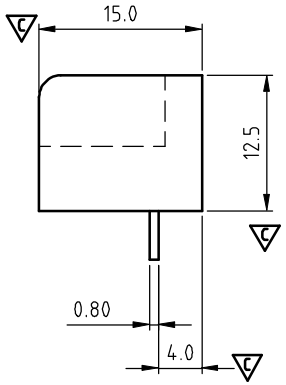

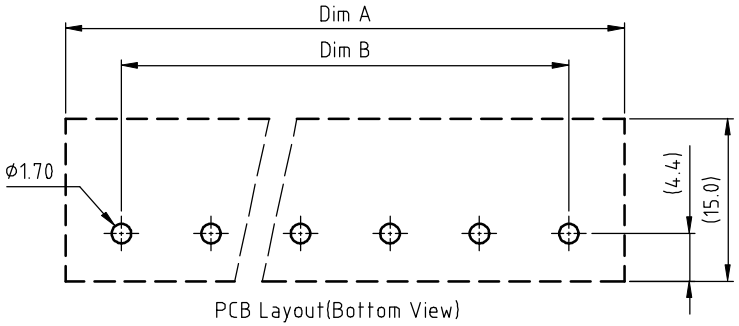

6

N = Number of poles

Dim A=Nx8.25+2.0

Dim B=(N-1)x8.25

Poles \ Tol.	Dim A&B
2-5p	±0.20
6-10p	±0.25
11-16p	±0.35
17-24p	±0.40
25-30p	±0.50

MATERIALS ELECTRICAL	cULus / CQC 2
9 RATED VOLTAGE & CURRENT:	300 V, 20 A/300 V, 32 A
9 WITHSTAND VOLTAGE:	AC 2500V/Min
INSULATION RESISTANCE:	1000 MΩ OR MORE AT DC 500 V
OPERATING TEMPERATURE RANG:	-40 °C ~ +115 °C
SCREW TORQUE VALUE:	8.8 Lb-In/ 8.8 Lb-In..
WIRE RANGE:	22 - 12 AWG/22 - 12 AWG 5
1) MOLDED PARTS:	POLYMIDE 66, UL 94 V-0 BLACK
2) TERMINAL:	BRASS, 0.8t, Tin PLATED
7 3) TERMINAL SCREWS:	STEEL,M3
4 Critical dimension: C	
APPROVAL: cULus csc 2	

1 PART NO.:

YK 331 xx 0 x x 00G

- NO. OF POLES
  - 02: 2 POLES
  - 03: 3 POLES
  - 04: 4 POLES
  - :
  - :
  - 30: 30 POLES
- TERMINAL & SCREW PLATED
  - 0: TERMINAL & SCREW: G/F
  - 7 1: TERMINAL: G/F, SCREW: Zinc
  - 2: TERMINAL: Sn, SCREW: G/F
  - 7 3: TERMINAL: Sn, SCREW: Zinc
- MARK
  - 0: "@" MARK
  - 1: "ANY" MARK
- G:RoHS compliant (lead<4%) in copper alloy

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	YK-331 W/o flange & W/o cover Series					
PART NO.	YK331xx0xx00G			DWG NO.	8YK0001-331	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Jacky 2013.12.23	Jacky 2013.12.23	SHEET: 01/01	UNIT: mm SCALE: NONE REV.: G	X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°