NOTES:
1. MATERIAL: SEE LEGEND
2. FINISH: SEE LEGEND
3. PRODUCT SPECIFICATION: PS-40-02
   PACKAGING SPECIFICATION: CHAIN FORM: SEE PK-2759-002
   LOOSE FORM: SEE PK-2759-001
4. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE
5. CRIMP FOR 22 TO 26 GA. WIRE WITH MAX. INSULATION DIA. OF (1.65)/.065
6. THIS PRODUCT CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002

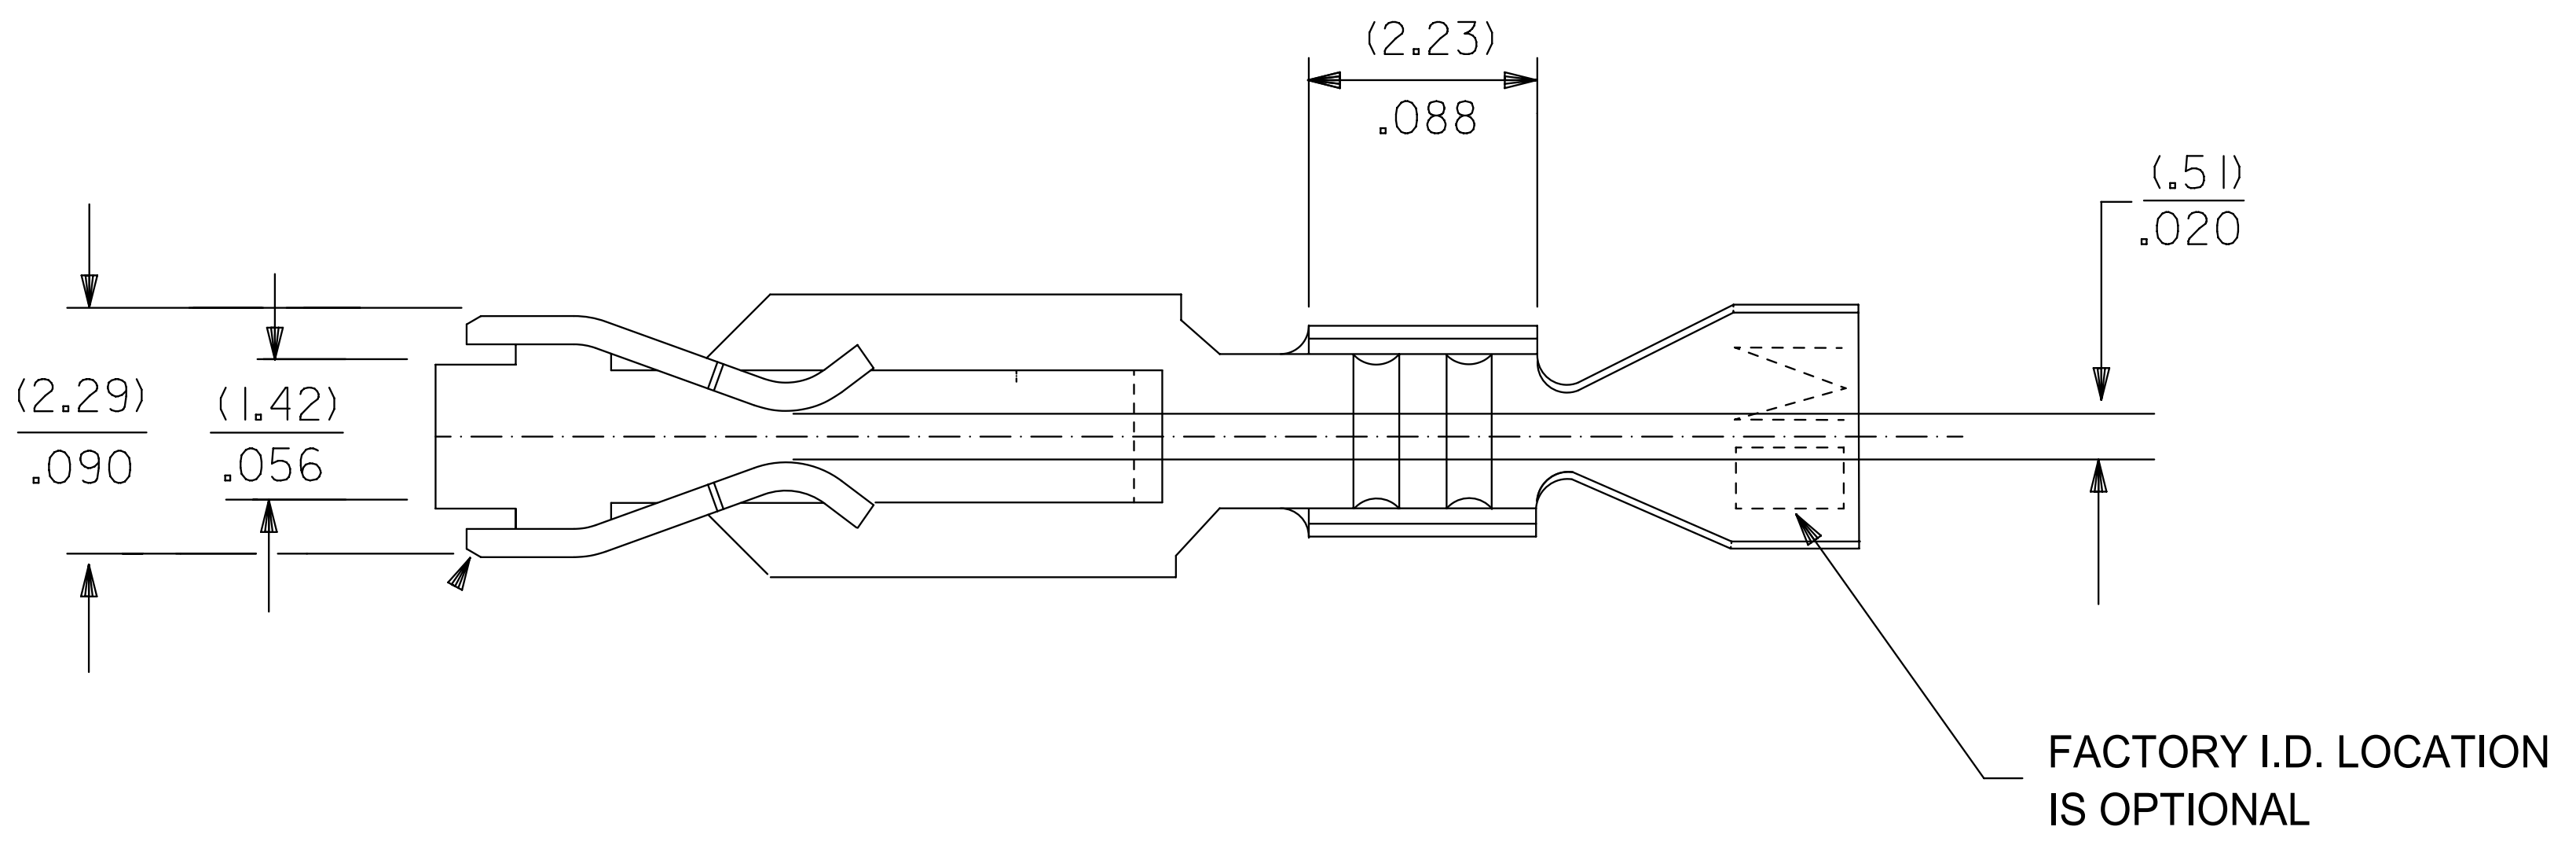

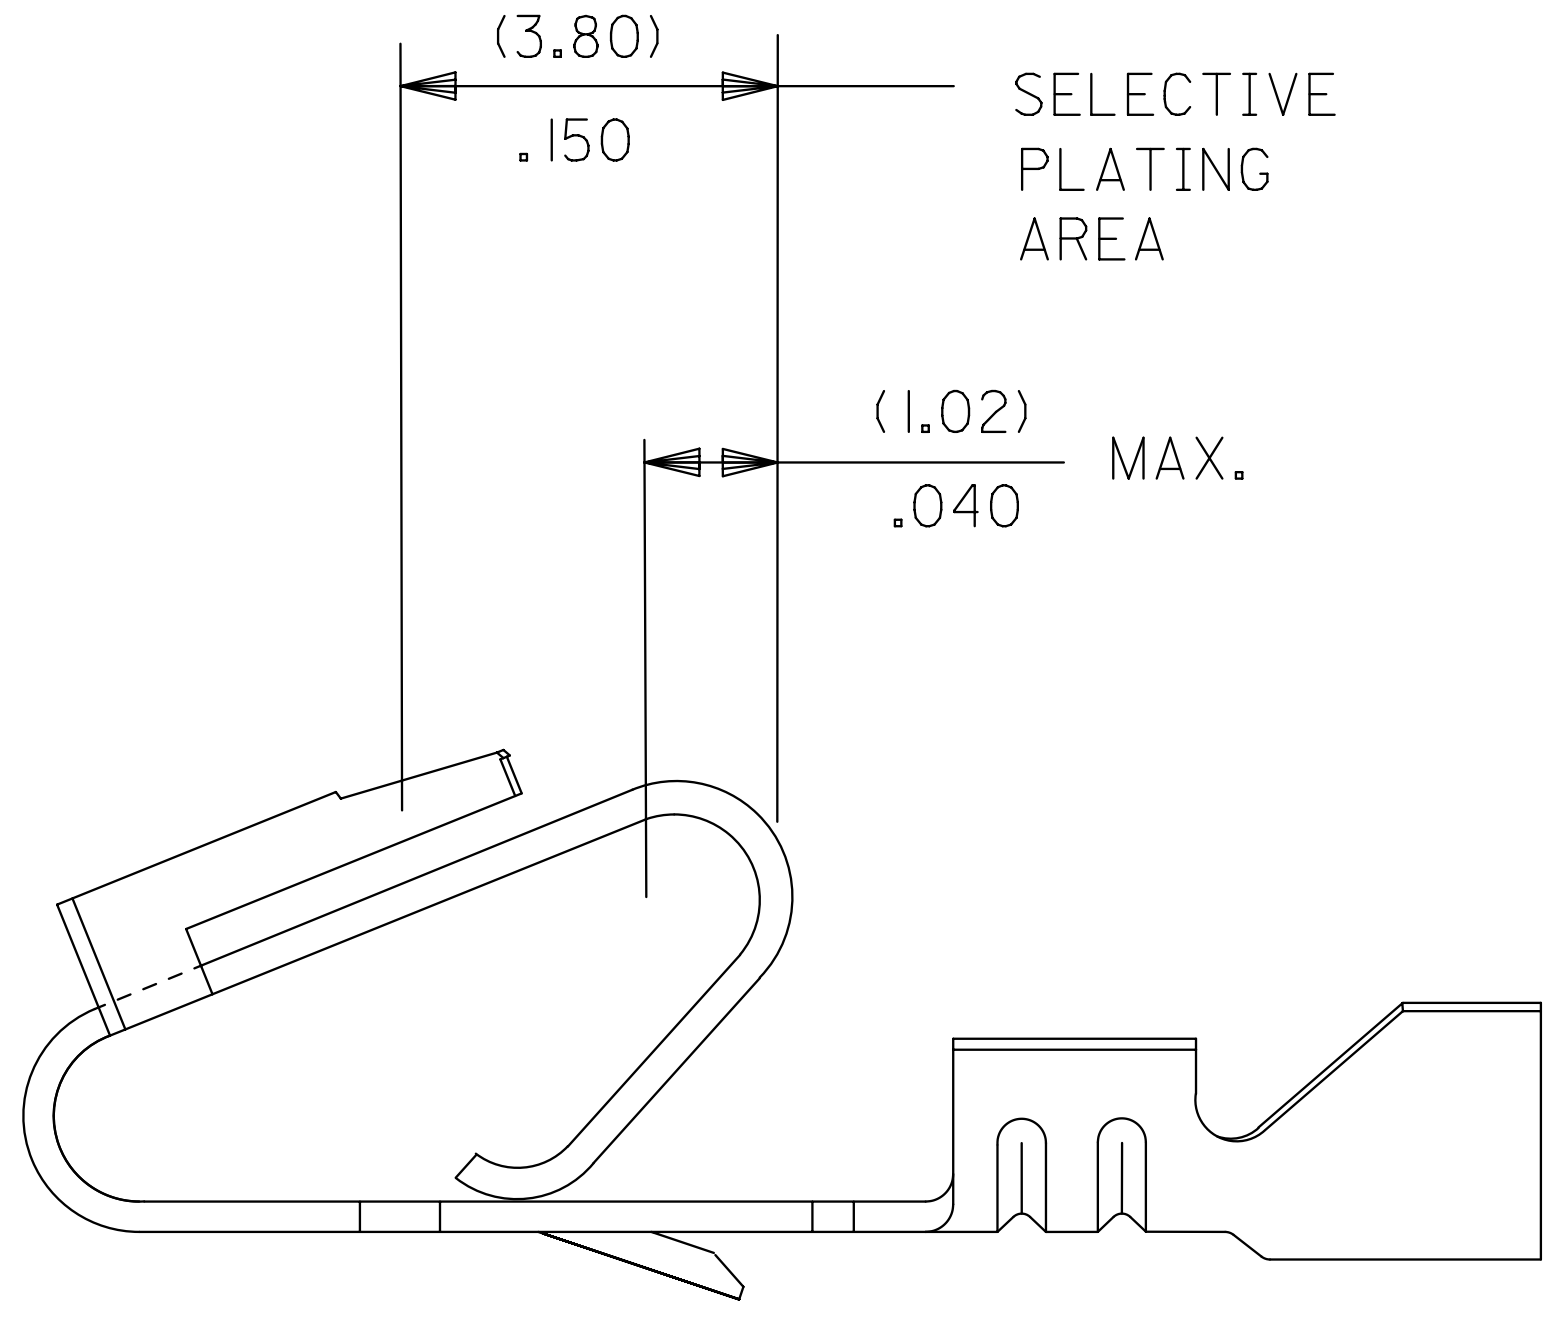

SELECTIVE PLATING AREA

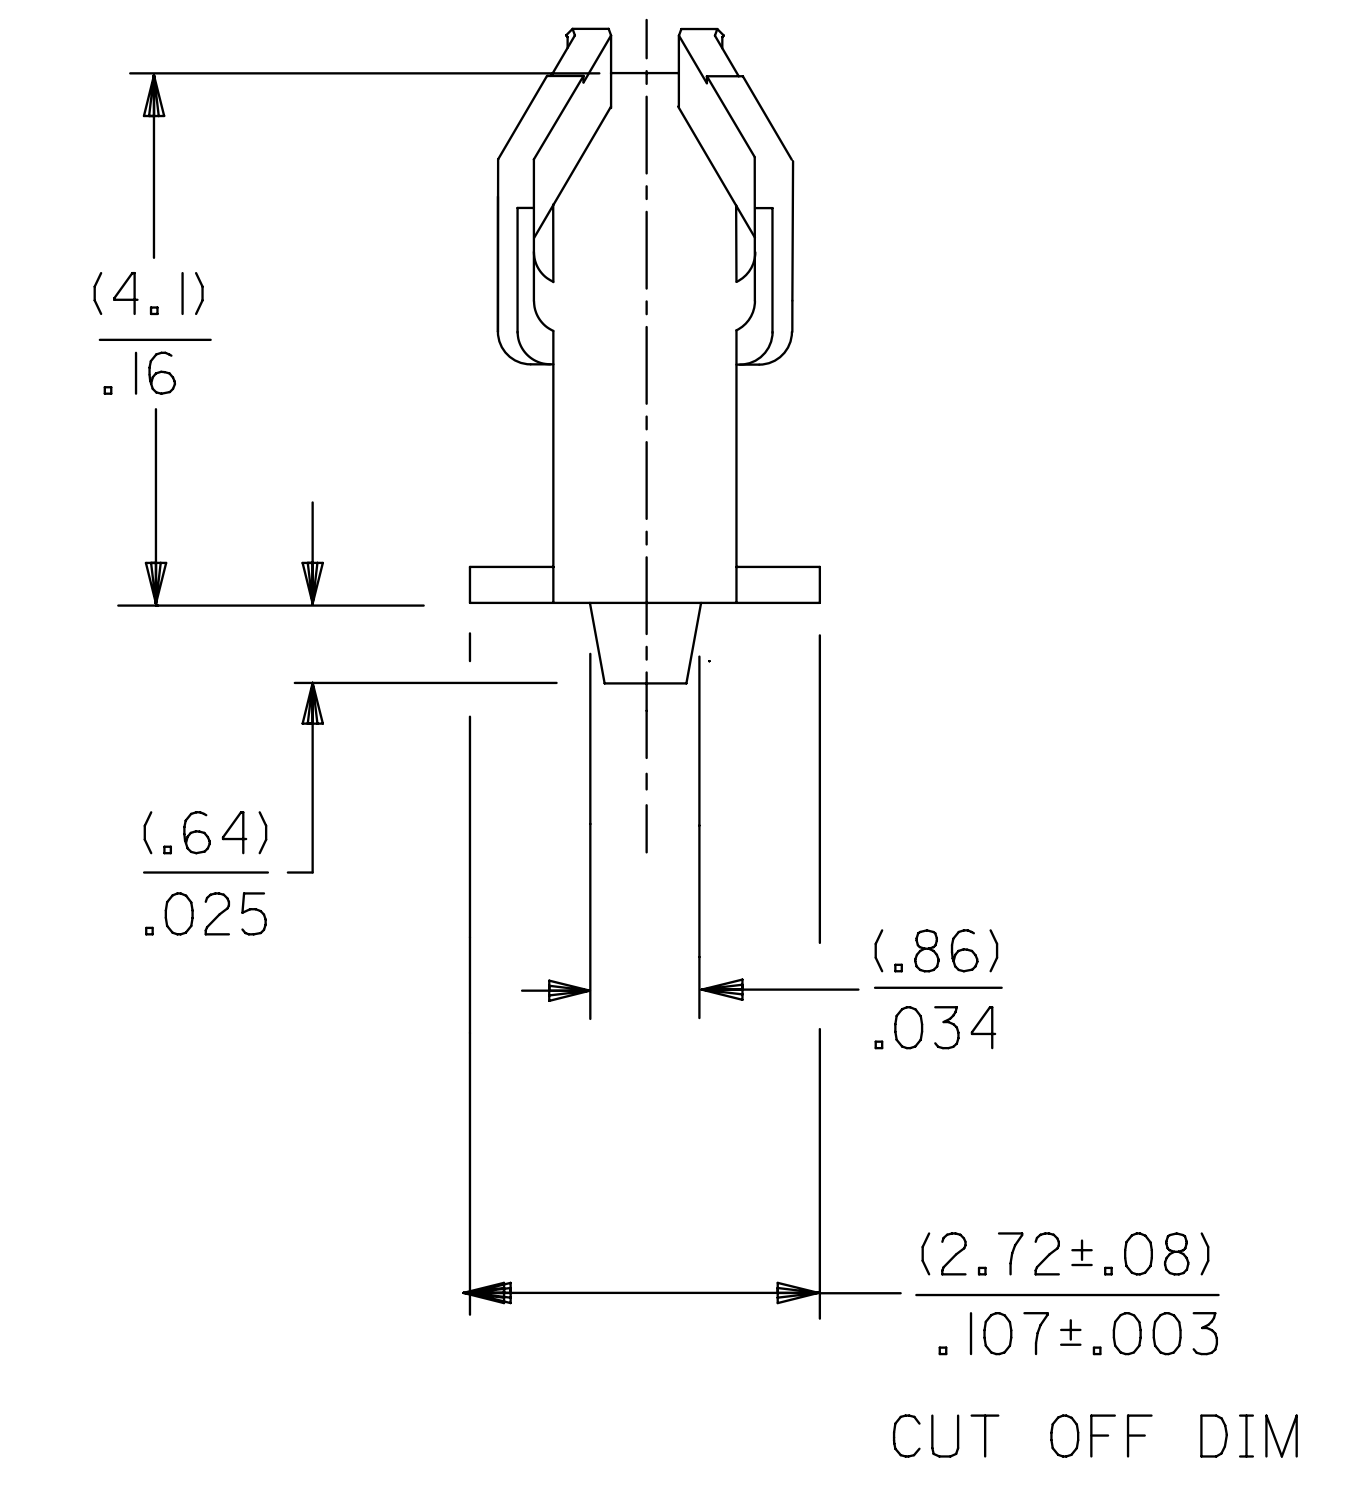

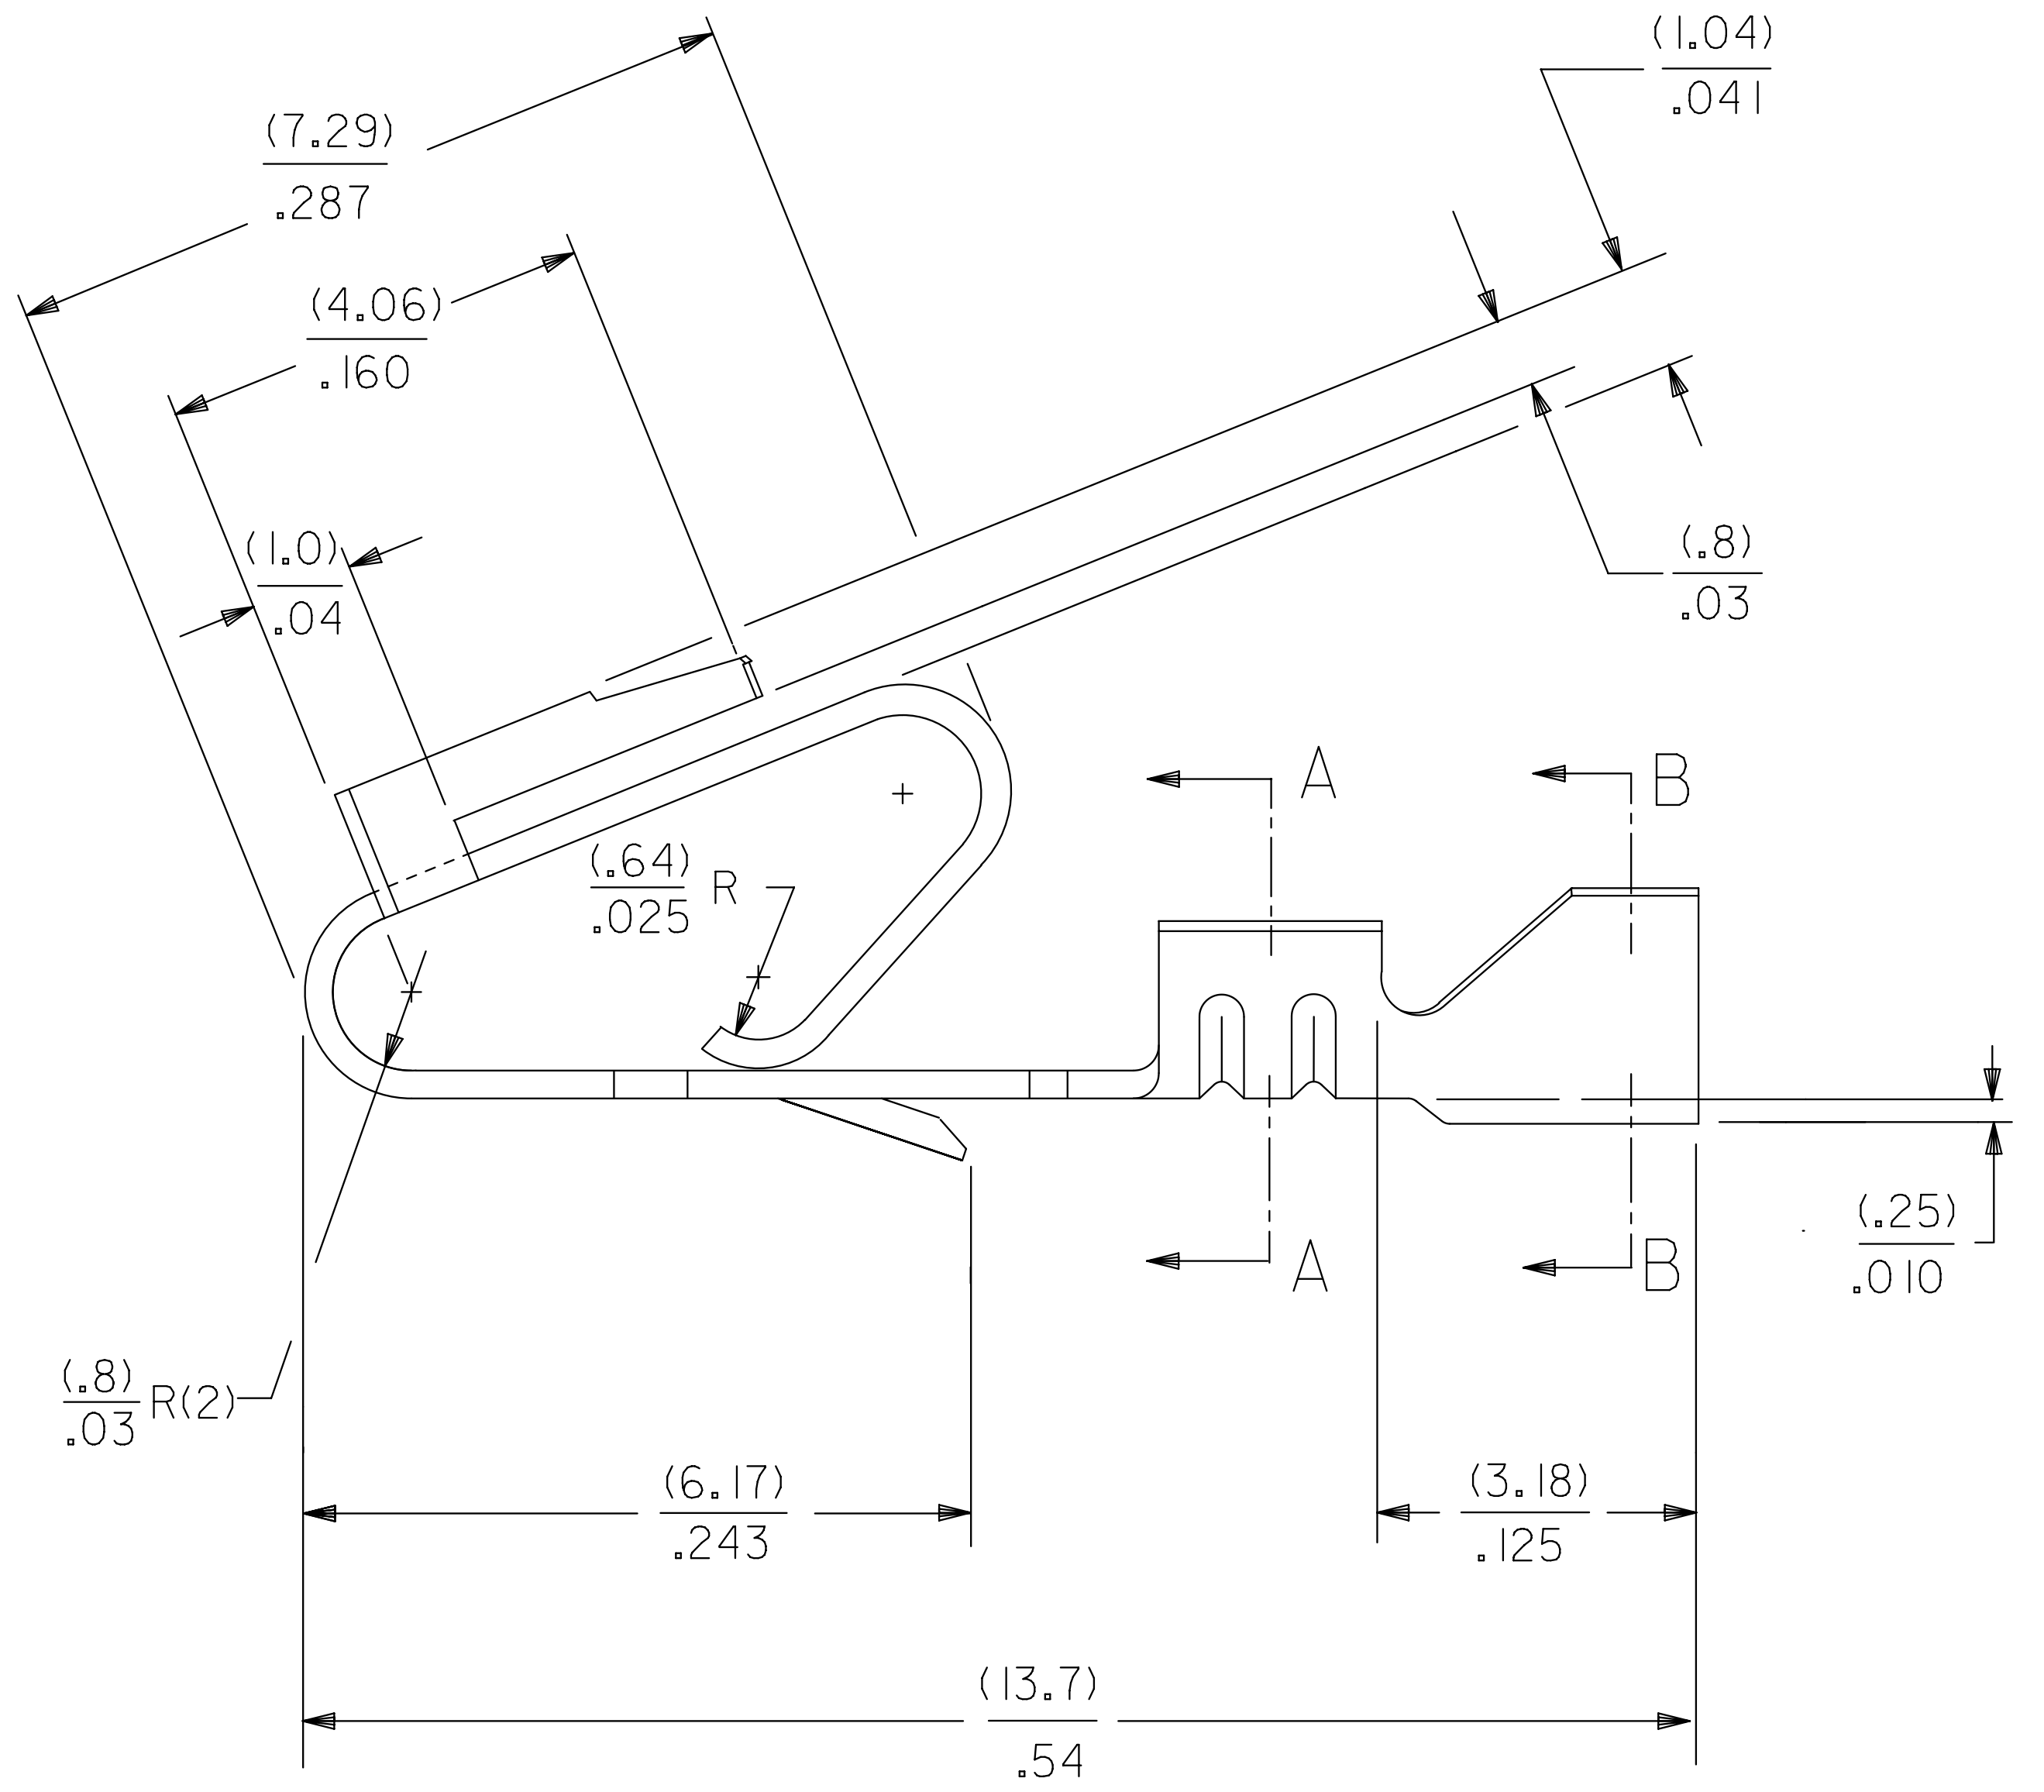

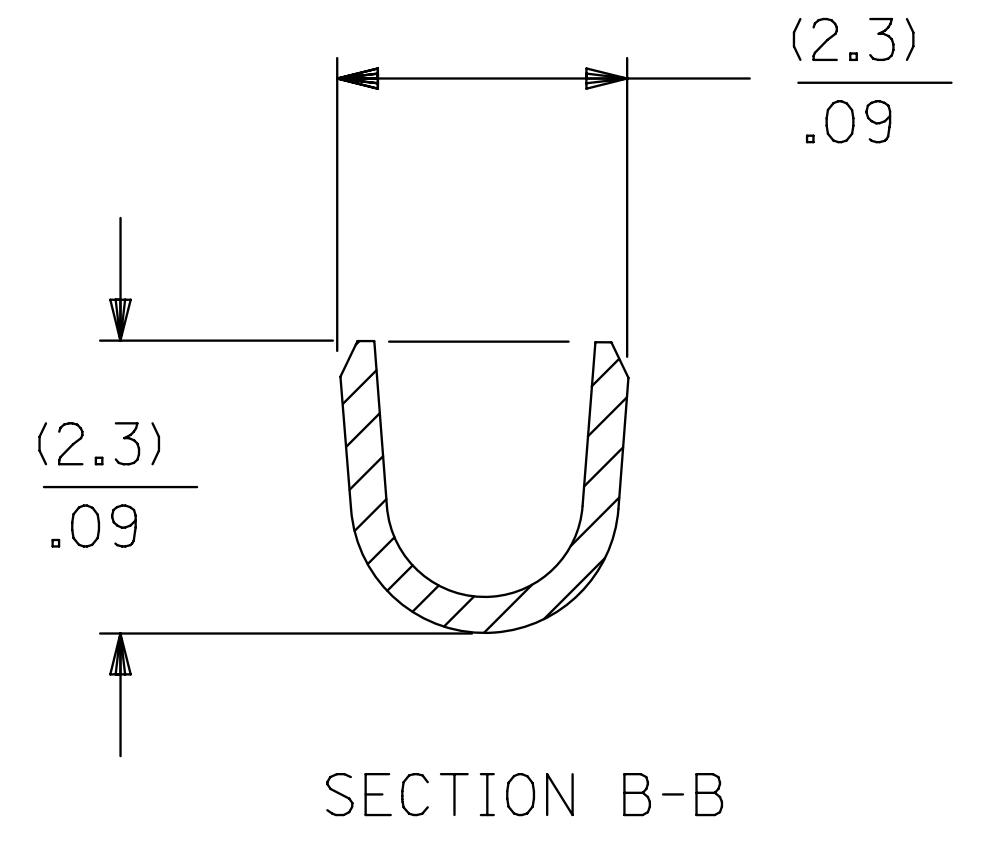

SECTION B-B

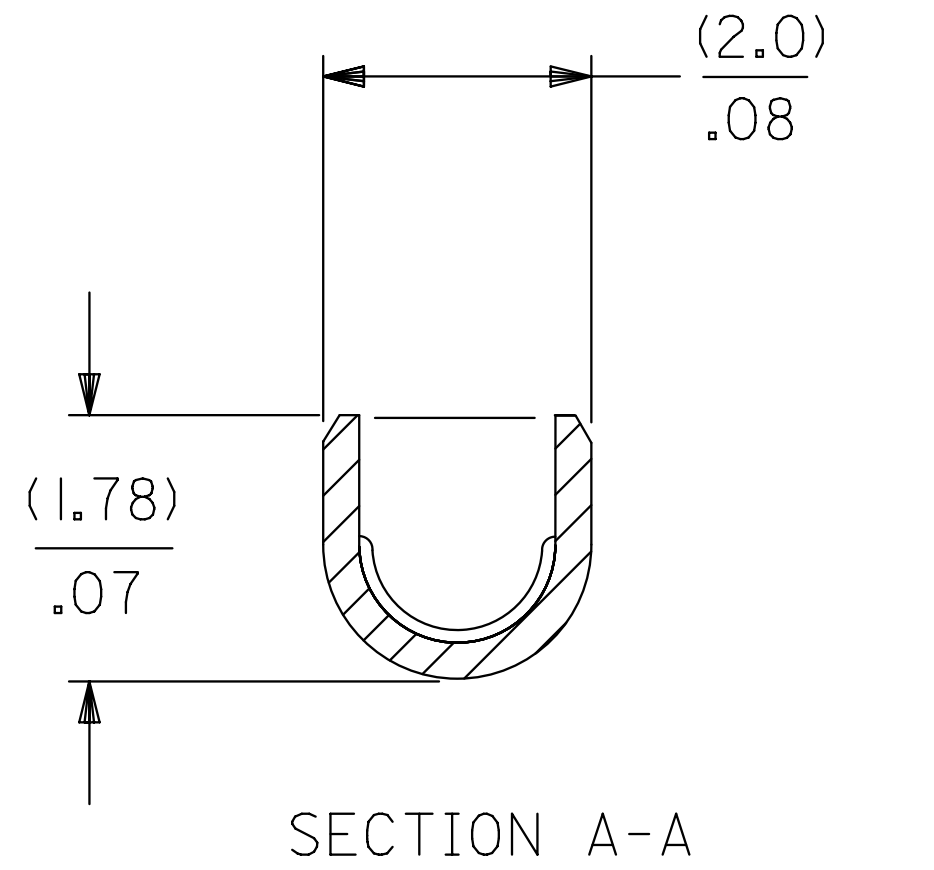

SECTION A-A

7258-*(*)*

MAT'L. (.27)/.0106 THK
BLANK=BRASS
A=PHOS. BRONZE

FORM
BLANK= CHAIN PER DETAIL B
A=CHAIN PER DETAIL A
L= LOOSE

PLATING PER SDES- 88

(909) - HOT TIN DIP: (0.00254)/.000100 MIN.
(558) - SELECT GOLD: (0.00076)/.000030 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.
(561) - SELECT GOLD: (0.00076)/.000030 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.
(555) - SELECT GOLD: (0.00038)/.000015 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.

WINDING DETAIL B

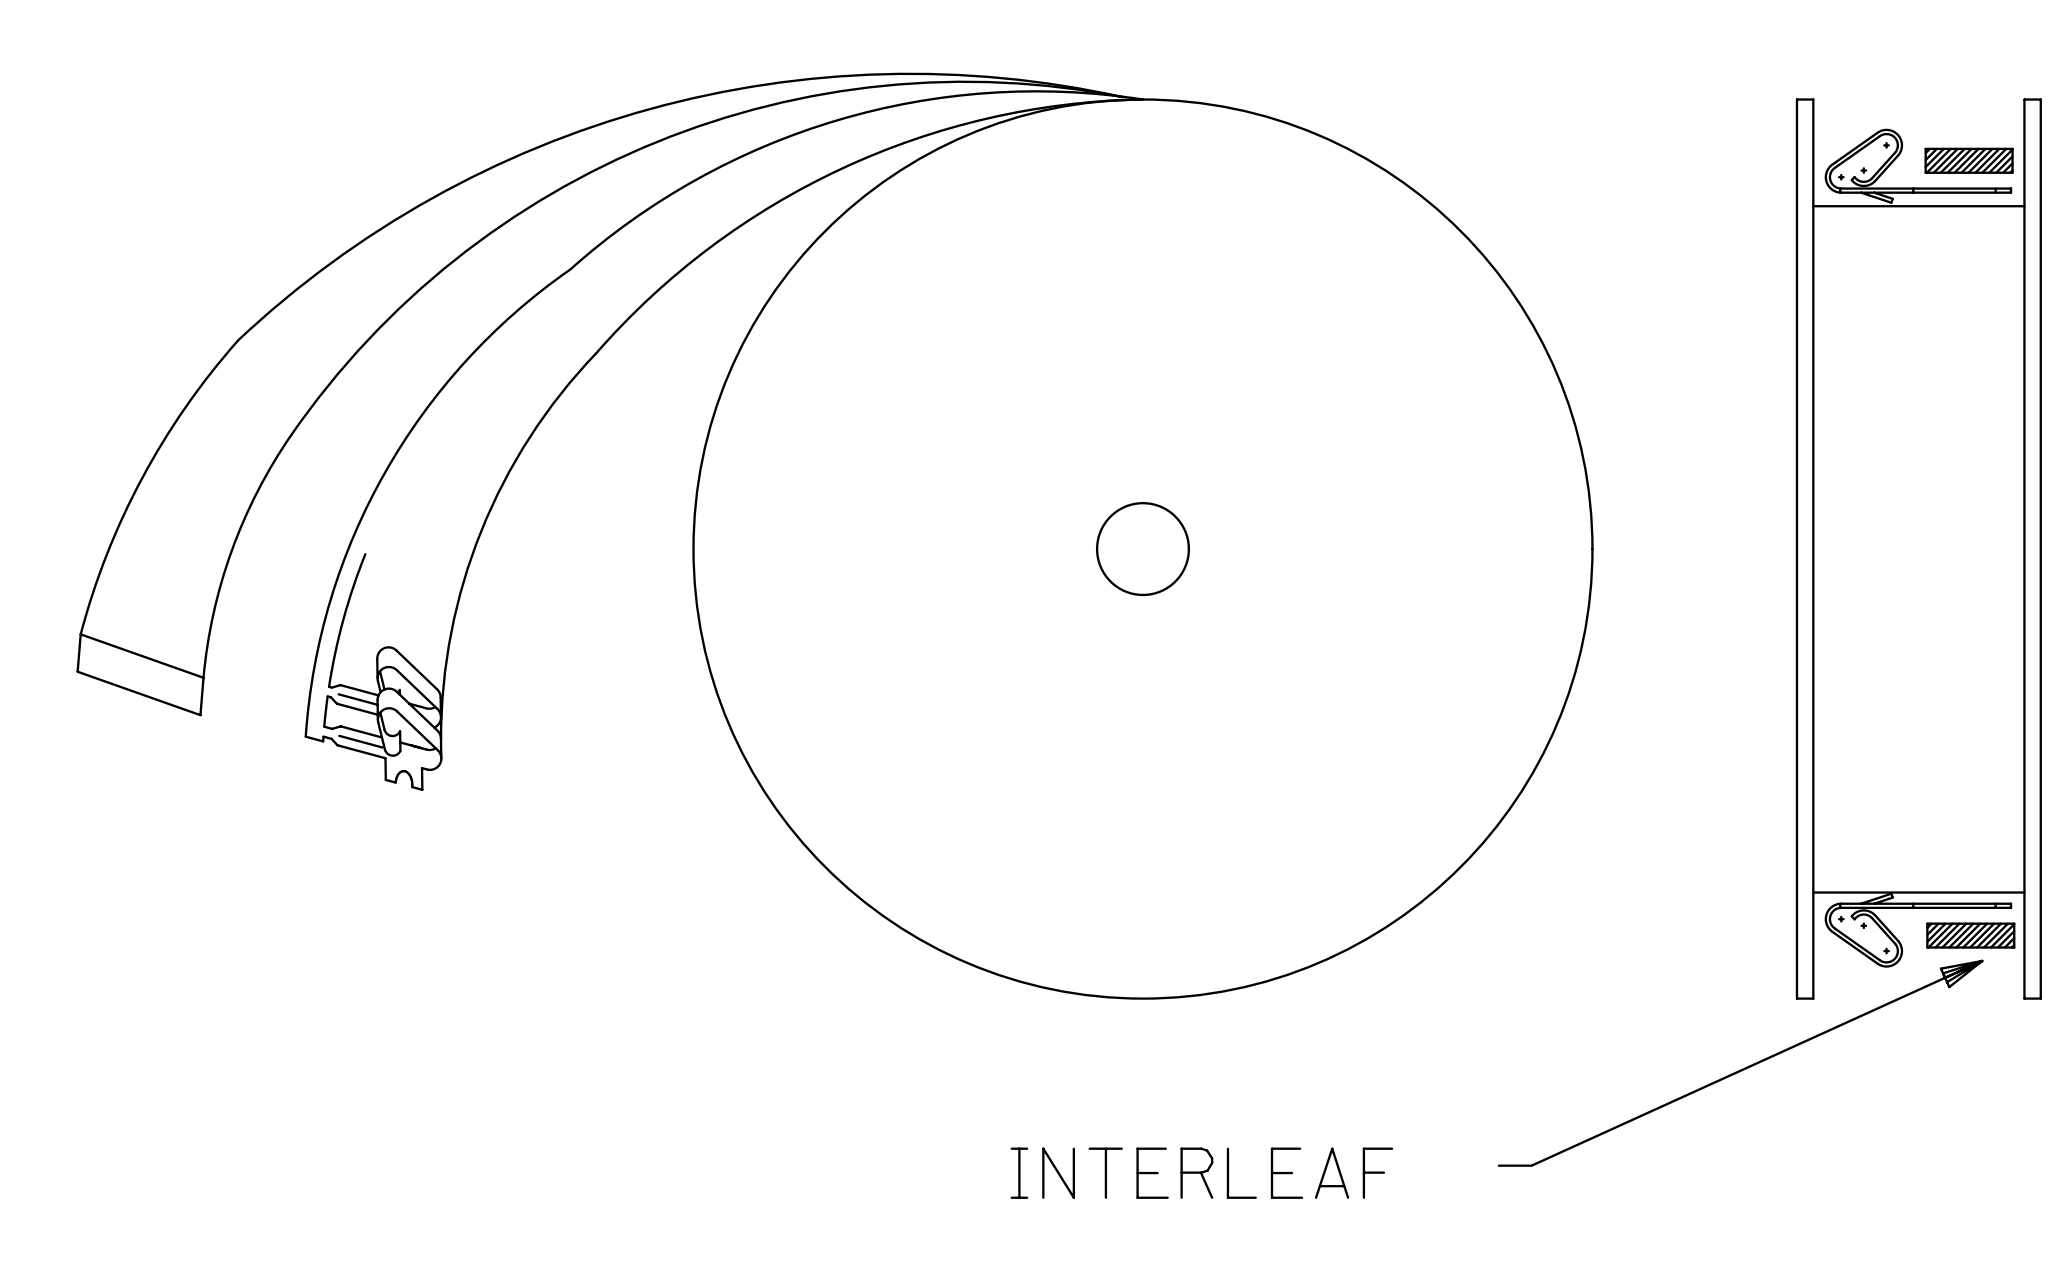

WINDING DETAIL A

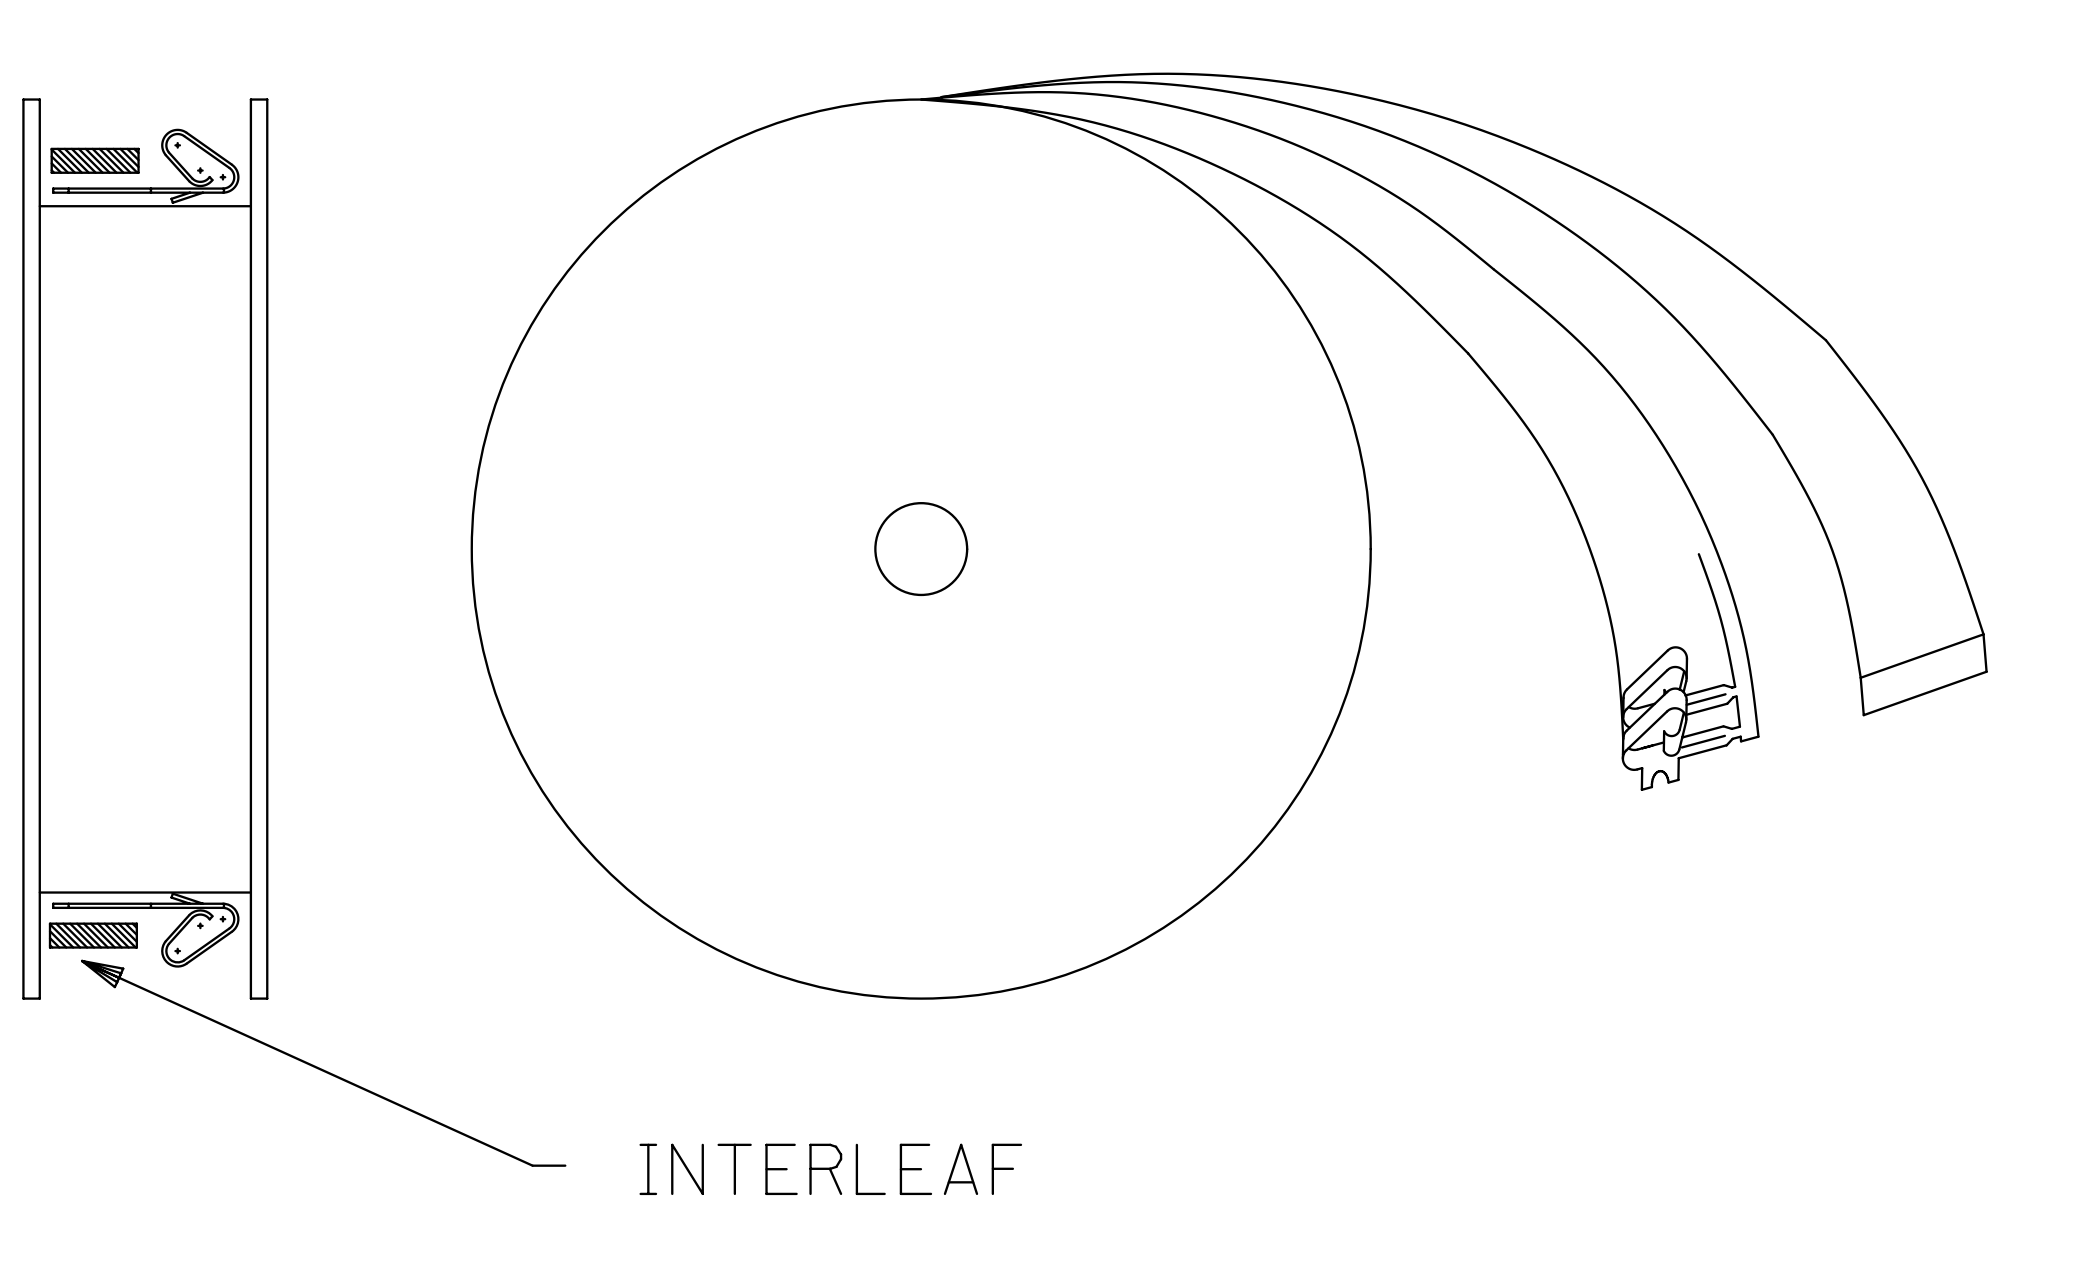

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SYMBOLS
- FA = 0
- FC = 0
- FP = 0
- S = 0
- ▼ = 0
- C = 0
- ☒ = 0
- ■ = 0
- C = 0

DIMENSION UNITS: MM
SCALE: 1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	± 0.01
2 PLACES	± 0.25	± 0.014
1 PLACE	± 0.36	±
0 PLACES	±	±
ANGULAR TOL		± 0.5 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: NOTE 3 UPDATED

EC NO: 605479
DRWN: SS06 2018/09/12
CHK'D: ISHWARG 2018/10/05
APPR: ISHWARG 2018/10/05

INITIAL REVISION:
DRWN: JJS 1987/12/07
APPR: LENZ 1987/12/07

THIRD ANGLE PROJECTION
DRAWING: D-SIZE
SERIES: 7258

molex

TRIFURCON TERMINAL
CRIMP TYPE, .156 CENTERS 22 TO 26 AWG

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-7258	PSD	001	U1

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE CHART	GENERAL MARKET	1 OF 2

DOCUMENT STATUS	P1	RELEASE DATE	2018/10/05 09:56:26

7258-(*)*

PART NO.	ENG. NO	
08-50-0183	7258-(P909)	
08-50-0185	7258-(P909)L	
08-50-0283	7258-(P909)A	

7258-A(*)*

PART NO.		ENG. NO	
08-04-0001		7258-A(999)	
08-65-0121	*	7258-A(P561)	ES-276-P561
08-65-0122	*	7258-A(P561)L	
08-56-0123	*	7258-A(P558)	MAKE FROM 7258-A(P561)
08-56-0124	*	7258-A(P558)L	
		7258-A(561)	
		7258-A(561)L	
08-52-0124	*	7258-A(P909)	
08-52-0125	*	7258-A(P909)L	
08-65-0126		7258-A(P555)	ES-276-P555
08-65-0127		7258-A(P555)L	

PART NO.	ENG. NO	

PART NO.	ENG. NO(SUFFIX ONLY)	

PART NO.	ENG. NO(SUFFIX ONLY)	VOID CKT.

PART NO.	ENG. NO(SUFFIX ONLY)	VOID CKT.

SYMBOLS

FA = 0
FC = 0
FP = 0
S = 0
▼ = 0
C = 0
☒ = 0
■ = 0
C = 0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS: MM
SCALE: 1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	± 0.01
2 PLACES	± 0.25	± 0.014
1 PLACE	± 0.36	±
0 PLACES	±	±
ANGULAR TOL	± 0.5 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: NOTE 3 UPDATED

EC NO: 605479
DRWN: SS06 2018/09/12
CHK'D: ISHWARG 2018/10/05
APPR: ISHWARG 2018/10/05

INITIAL REVISION:
DRWN: JJS 1987/12/07
APPR: LENZ 1987/12/07

THIRD ANGLE PROJECTION
DRAWING: D-SIZE
SERIES: 7258

molex

TRIFURCON TERMINAL
CRIMP TYPE, .156 CENTERS 22 TO 26 AWG

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-7258	PSD	001	U1

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE CHART	GENERAL MARKET	2 OF 2

DOCUMENT STATUS	P1	RELEASE DATE	2018/10/05 09:56:26