


CIRCUIT SIZE	DIM. "A"	DIM. "B"
6	.331 (8.40)	.76 (19.2)
8	.496 (12.60)	.92 (23.4)
10	.661 (16.80)	1.09 (27.6)
12	.827 (21.00)	1.25 (31.8)
14	.992 (25.20)	1.42 (36.0)
16	1.157 (29.40)	1.58 (40.2)
18	1.323 (33.60)	1.75 (44.4)
20	1.488 (37.80)	1.91 (48.6)
22	1.654 (42.00)	2.08 (52.8)
24	1.819 (46.20)	2.24 (57.0)

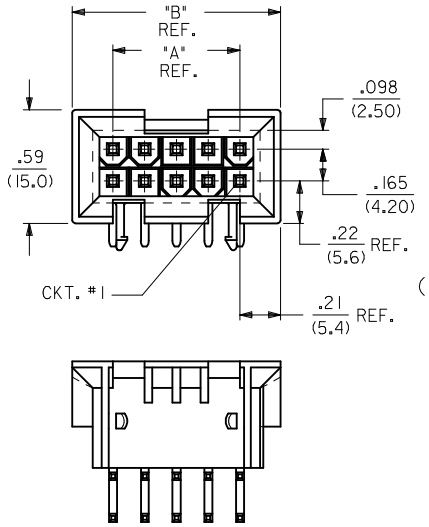

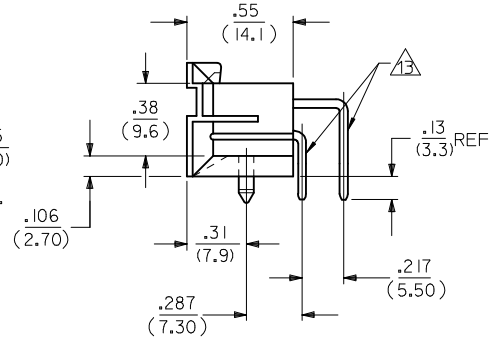


NOTES:

1) MATERIAL: HOUSING: "A" = NYLON 6/6, U.L. 94V-2, COLOR: NATURAL.
"B" = NYLON 6/6, U.L. 94V-0, COLOR: NATURAL.
TERMINAL: BRASS ALLOY
2) TERMINAL PLATING:
1 = .000100/(.00254) MIN. MATTE TIN OVER .000050/(.00127) MIN. NICKEL OVERALL.
5 = .000030/(.00076) MIN. SELECT GOLD AND .000100/(.00254) MIN. SELECT MATTE TIN OVER .000050/(.00127) MIN. NICKEL OVERALL.
3) PRODUCT SPECIFICATION: PS-5556-002
4) PACKAGING SPECIFICATION: PK-42404-002.
5) 4-24 CKT. PARTS MATE WITH MINI-FIT JR. RECEPTACLES #5557, #42385, #44516 AND #42474. 2 CKT. PART MATES WITH #42385, #44516 AND #42474 ONLY.
6) PART ALLOWS FOR UP TO .100/(2.54) MISALIGNMENT WITH MATING RECEPTACLE IN ANY DIRECTION. SEE MATING CONNECTOR DRAWINGS FOR SPECIFIC ALLOWANCES.
7) CONNECTOR ASSEMBLIES ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
8) A MAXIMUM TOLERANCE OF .050/(1.27) ALLOWS FOR 2 POINTS OF ELECTRICAL CONTACT. A MAXIMUM TOLERANCE OF .020/(.51) ALLOWS FOR 4 POINTS OF CONTACT.
9) DISCOLORATION IN THE BANDOLIER CARRIER AREA OF THE PIN IS INHERENT TO THE PLATING PROCESS AND IS DUE TO THE MASKING EFFECT OF THE CARRIER. THIS DISCOLORATION IS IN A NON-FUNCTIONAL AREA OF THE PIN AND WILL NOT AFFECT THE PERFORMANCE OF THE HEADER ASSEMBLY.
10) PART IS NOT DESIGNED FOR CURRENT SHARING.
11) PART IS NOT INTENDED TO PROVIDE ANY ALIGNMENT OF CUSTOMER COMPONENTS OR MODULES, SUCH AS POWER SUPPLIES AND CHASSIS.
12) PARTS CONFORM TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002."
13) FORMING MARKS ARE ACCEPTABLE.
14) CORNER CORE-OUTS ARE OPTIONAL AND MAY OR MAY NOT BE PRESENT
15) TEXT ON PART IS FOR REFERENCE ONLY. TEXT AND TEXT LOCATION MAY VARY DEPENDING ON PART NUMBER AND/OR TOOL.



A-42404-****

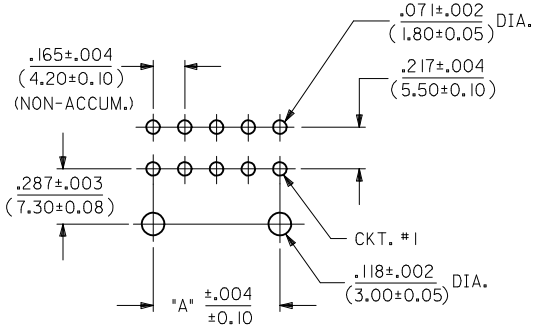


RECOMMENDED HOLE LAYOUT FOR .070/(1.78) MAX. THICK P.C. BOARD VIEWED FROM COMPONENT SIDE

LEGEND:

A-42404-****

BASE NUMBER:
CKT. SIZE: (02-24)
HOUSING MAT'L: (SEE NOTE 1)
TERMINAL PLATING: (SEE NOTE 2)



R.A. HEADER A-42404	MATING CONNECTOR	HSG. MAT'L.	TERM. MAT'L.	PLATING
		MATING CONNECTOR FEATURES		
-**B2, _**B4	42474-**21, 5556-PBGS*P	94V-0	PHOS. BRZ.	GOLD
-**A2, _**A4	42474-**11, 5556-PBGS*P	94V-2		
-**B1, _**B3	42474-**21, 5556-PBS*P	94V-0		TIN
-**A1, -**A3	42474-**11, 5556-PBS*P	94V-2		
-**B2, _**B4	42474-**21, 5556-GS*P	94V-0	BRASS	GOLD
-**A2, _**A4	42474-**11, 5556-GS*P	94V-2		
-**B1, _**B3	42474-**21, 5556-S*P	94V-0		TIN
-**A1, -**A3	42474-**11, 5556-S*P	94V-2		
-**B2, _**B4	A-42385-**D2	94V-0	PHOS. BRZ.	GOLD
-**A2, _**A4	A-42385-**C2	94V-2		
-**B1, _**B3	A-42385-**D1	94V-0		TIN
-**A1, -**A3	A-42385-**C1	94V-2		
-**B2, _**B4	A-42385-**B2	94V-0	BRASS	GOLD
-**A2, _**A4	A-42385-**A2	94V-2		
-**B1, _**B3	A-42385-**B1	94V-0		TIN
-**A1, -**A3	A-42385-**A1	94V-2		

ADD BACK VIEW
EC NO: UCP2017-0438 2016/08/23
DRWN:CSLAFTER 2016/08/23
CHKD:JBELL
APPR:FSMITH 2016/09/21
DESCRIPTION
T3
REV

QUALITY SYMBOLS
E =0
E =0
E =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY	RWK
DATE	2/7/89
CHECKED BY	RJF
DATE	2/7/89
APPROVED BY	FSMITH
DATE	2011/11/01
MATERIAL NO.	SEE SHEET 3


TITLE: MINI-FIT JR. 2-24 CKT RIGHT ANGLE HEADER ASSY (BLIND MATE)

molex MOLEX INCORPORATED


DOCUMENT NO.: SDA-42404-****
SHEET NO.: 1 OF 3

SIZE C


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

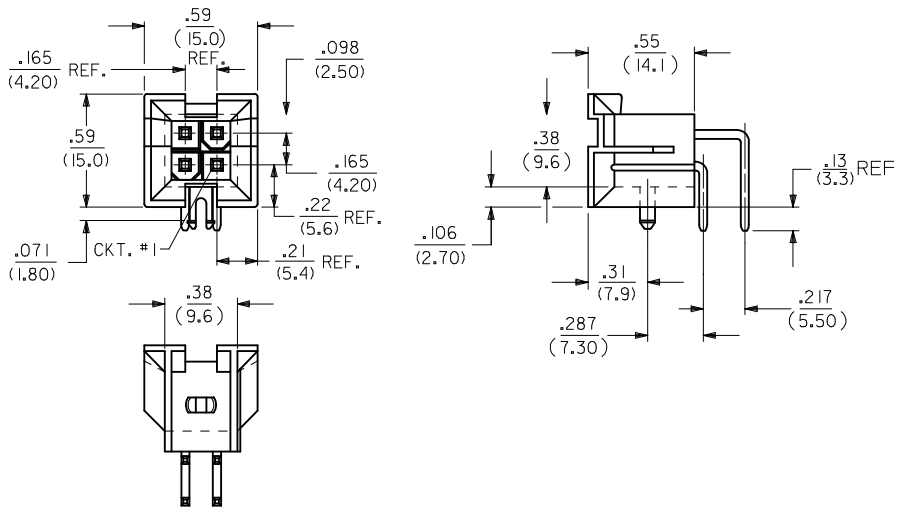


A-42404-04**

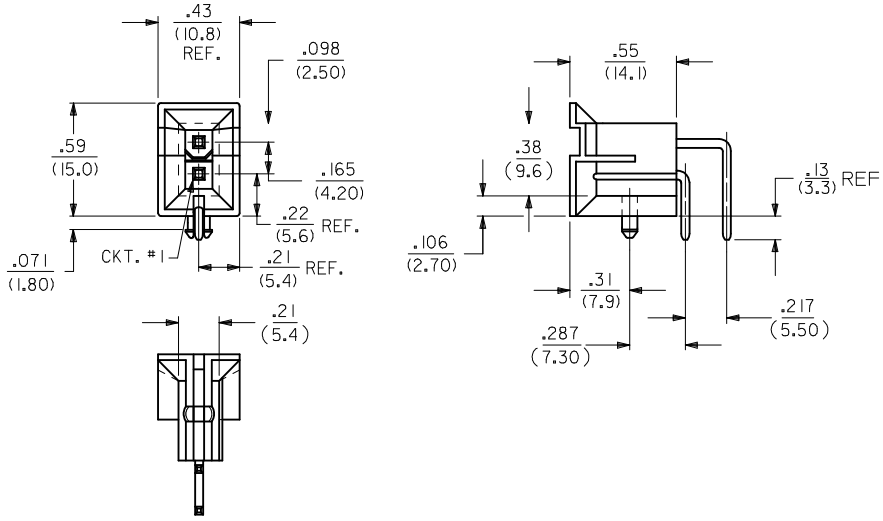


A-42404-02**

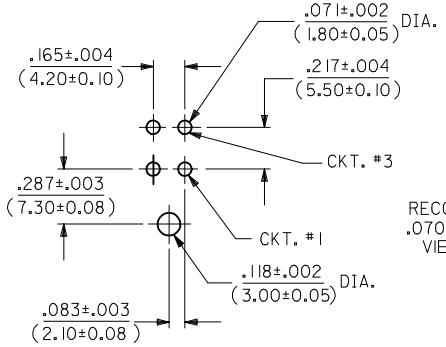

RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD
VIEWED FROM COMPONENT SIDE

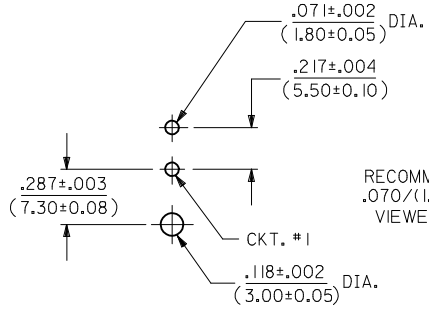

RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD
VIEWED FROM COMPONENT SIDE

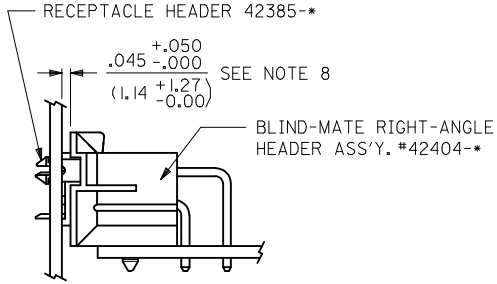

PANEL-TO-P.C.BOARD

SEE RECEPTACLE DRAWINGS FOR
ADDITIONAL MATING CONFIGURATIONS

SEE SHEET 1
EC NO: UCP2017-0438 2016/08/23
DRWN:CSLAFTER 2016/08/23
CHKD:JBELL
APPR:FSMITH 2016/09/21
DESCRIPTION
REV
T3

QUALITY SYMBOLS
F1 =0
F2 =0
F3 =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	RWK	2/7/89
CHECKED BY	RJF	2/7/89
APPROVED BY	FSMITH	2011/11/01

TITLE: MINI-FIT JR. 2-24 CKT
RIGHT ANGLE HEADER ASSY
(BLIND MATE)

MOLEX INCORPORATED

MATERIAL NO.: SEE SHEET 3
DOCUMENT NO.: SDA-42404-****
SHEET NO.: 2 OF 3
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

tb_frame_C_P_AM_T
Rev. F 2009/06/18

PART NUMBER	ENG. NUMBER	CKT. SIZE	HOUSING MATERIAL	PLATING (NOTE 2)
NOT TOOLED	A-42404-02A1	2	94V-2	MATTE TIN OVER NICKEL
15-24-6040	-04A1	4		
15-24-6060	-06A1	6		
NOT TOOLED	-08A1	8		
15-24-6100	-10A1	10		
NOT TOOLED	-12A1	12		
15-24-6140	-14A1	14		
NOT TOOLED	-16A1	16		
15-24-6180	-18A1	18		
NOT TOOLED	-20A1	20		
NOT TOOLED	-22A1	22		
15-24-6240	A-42404-24A1	24	94V-2	MATTE TIN OVER NICKEL
NOT TOOLED	A-42404-02A5	02	94V-2	SELECT GOLD OVER NICKEL
15-24-9047	A-42404-04A5	04		
15-24-9067	A-42404-06A5	06		
NOT TOOLED	A-42404-08A5	08		
15-24-9107	A-42404-10A5	10		
NOT TOOLED	A-42404-12A5	12		
15-24-9147	A-42404-14A5	14		
NOT TOOLED	A-42404-16A5	16		
15-24-9187	A-42404-18A5	18		
NOT TOOLED	A-42404-20A5	20		
NOT TOOLED	A-42404-22A5	22		
15-24-9247	A-42404-24A5	24	94V-2	SELECT GOLD OVER NICKEL
NOT TOOLED	A-42404-02B1	2	94V-0	MATTE TIN OVER NICKEL
15-24-9044	-04B1	4		
15-24-9064	-06B1	6		
NOT TOOLED	-08B1	8		
15-24-9104	-10B1	10		
NOT TOOLED	-12B1	12		
15-24-9144	-14B1	14		
15-24-9164	-16B1	16		
15-24-9184	-18B1	18		
NOT TOOLED	-20B1	20		
NOT TOOLED	-22B1	22		
15-24-9244	A-42404-24B1	24	94V-0	MATTE TIN OVER NICKEL
NOT TOOLED	A-42404-02B5	02	94V-0	SELECT GOLD OVER NICKEL
15-24-6043	A-42404-04B5	04		
15-24-6063	A-42404-06B5	06		
NOT TOOLED	A-42404-08B5	08		
15-24-6103	A-42404-10B5	10		
NOT TOOLED	A-42404-12B5	12		
15-24-6143	A-42404-14B5	14		
15-24-6163	A-42404-16B5	16		
15-24-6183	A-42404-18B5	18		
NOT TOOLED	A-42404-20B5	20		
NOT TOOLED	A-42404-22B5	22		
15-24-6243	A-42404-24B5	24	94V-0	SELECT GOLD OVER NICKEL

PART NUMBER	ENG. NUMBER	CKT. SIZE	HOUSING MATERIAL	PLATING (NOTE 5)

SEE SHEET 1
EC NO: UCP2017-0438
T3
DRWN: CSLAFTER 2016/08/23
CH'KD: JBELL 2016/08/23
APPR: FSMITH 2016/09/21

REV	DESCRIPTION

QUALITY SYMBOLS: E7 = 0, E6 = 0, E5 = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---
ANGULAR	± 1/2°	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM

DRAWN BY: RWK DATE: 2/7/89
CHECKED BY: RJF DATE: 2/7/89
APPROVED BY: FSMITH DATE: 2011/11/01

SIZE: C
MATERIAL NO.: SEE CHART

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


TITLE: MINI-FIT JR. 2-24 CKT RIGHT ANGLE HEADER ASSY (BLIND MATE)


SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DOCUMENT NO.: SDA-42404-****
MOLEX INCORPORATED

SHEET NO.: 3 OF 3


CIRCUIT SIZE	DIM. "A"	DIM. "B"
6	.331 (8.40)	.76 (19.2)
8	.496 (12.60)	.92 (23.4)
10	.661 (16.80)	1.09 (27.6)
12	.827 (21.00)	1.25 (31.8)
14	.992 (25.20)	1.42 (36.0)
16	1.157 (29.40)	1.58 (40.2)
18	1.323 (33.60)	1.75 (44.4)
20	1.488 (37.80)	1.91 (48.6)
22	1.654 (42.00)	2.08 (52.8)
24	1.819 (46.20)	2.24 (57.0)

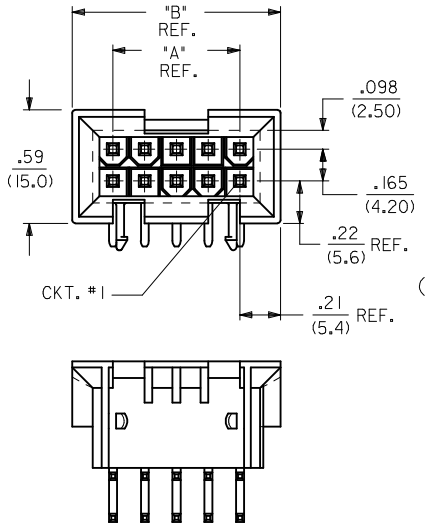

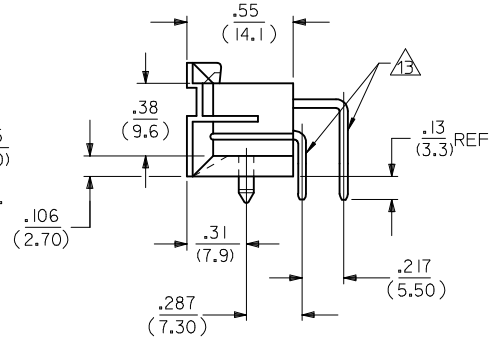


NOTES:

1) MATERIAL: HOUSING: "A" = NYLON 6/6, U.L. 94V-2, COLOR: NATURAL.
"B" = NYLON 6/6, U.L. 94V-0, COLOR: NATURAL.
TERMINAL: BRASS ALLOY
2) TERMINAL PLATING:
1 = .000100/(.00254) MIN. MATTE TIN OVER .000050/(.00127) MIN. NICKEL OVERALL.
5 = .000030/(.00076) MIN. SELECT GOLD AND .000100/(.00254) MIN. SELECT MATTE TIN OVER .000050/(.00127) MIN. NICKEL OVERALL.
3) PRODUCT SPECIFICATION: PS-5556-002
4) PACKAGING SPECIFICATION: PK-42404-002.
5) 4-24 CKT. PARTS MATE WITH MINI-FIT JR. RECEPTACLES #5557, #42385, #44516 AND #42474. 2 CKT. PART MATES WITH #42385, #44516 AND #42474 ONLY.
6) PART ALLOWS FOR UP TO .100/(2.54) MISALIGNMENT WITH MATING RECEPTACLE IN ANY DIRECTION. SEE MATING CONNECTOR DRAWINGS FOR SPECIFIC ALLOWANCES.
7) CONNECTOR ASSEMBLIES ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
8) A MAXIMUM TOLERANCE OF .050/(1.27) ALLOWS FOR 2 POINTS OF ELECTRICAL CONTACT. A MAXIMUM TOLERANCE OF .020/(.51) ALLOWS FOR 4 POINTS OF CONTACT.
9) DISCOLORATION IN THE BANDOLIER CARRIER AREA OF THE PIN IS INHERENT TO THE PLATING PROCESS AND IS DUE TO THE MASKING EFFECT OF THE CARRIER. THIS DISCOLORATION IS IN A NON-FUNCTIONAL AREA OF THE PIN AND WILL NOT AFFECT THE PERFORMANCE OF THE HEADER ASSEMBLY.
10) PART IS NOT DESIGNED FOR CURRENT SHARING.
11) PART IS NOT INTENDED TO PROVIDE ANY ALIGNMENT OF CUSTOMER COMPONENTS OR MODULES, SUCH AS POWER SUPPLIES AND CHASSIS.
12) PARTS CONFORM TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002."
13) FORMING MARKS ARE ACCEPTABLE.
14) CORNER CORE-OUTS ARE OPTIONAL AND MAY OR MAY NOT BE PRESENT
15) TEXT ON PART IS FOR REFERENCE ONLY. TEXT AND TEXT LOCATION MAY VARY DEPENDING ON PART NUMBER AND/OR TOOL.



A-42404-****

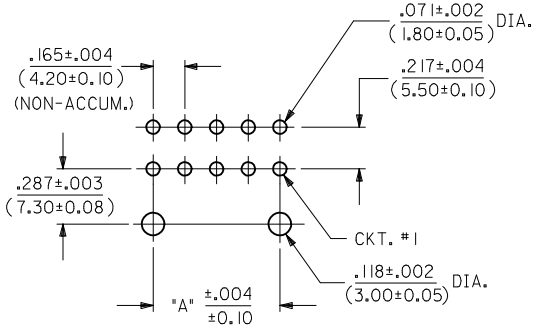


RECOMMENDED HOLE LAYOUT FOR .070/(1.78) MAX. THICK P.C. BOARD VIEWED FROM COMPONENT SIDE

LEGEND:

A-42404-****

BASE NUMBER:
CKT. SIZE: (02-24)
HOUSING MAT'L: (SEE NOTE 1)
TERMINAL PLATING: (SEE NOTE 2)



R.A. HEADER A-42404	MATING CONNECTOR	HSG. MAT'L.	TERM. MAT'L.	PLATING
		MATING CONNECTOR FEATURES		
-**B2, _**B4	42474-**21, 5556-PBGS*P	94V-0	PHOS. BRZ.	GOLD
-**A2, _**A4	42474-**11, 5556-PBGS*P	94V-2		
-**B1, _**B3	42474-**21, 5556-PBS*P	94V-0		TIN
-**A1, -**A3	42474-**11, 5556-PBS*P	94V-2		
-**B2, _**B4	42474-**21, 5556-GS*P	94V-0	BRASS	GOLD
-**A2, _**A4	42474-**11, 5556-GS*P	94V-2		
-**B1, _**B3	42474-**21, 5556-S*P	94V-0		TIN
-**A1, -**A3	42474-**11, 5556-S*P	94V-2		
-**B2, _**B4	A-42385-**D2	94V-0	PHOS. BRZ.	GOLD
-**A2, _**A4	A-42385-**C2	94V-2		
-**B1, _**B3	A-42385-**D1	94V-0		TIN
-**A1, -**A3	A-42385-**C1	94V-2		
-**B2, _**B4	A-42385-**B2	94V-0	BRASS	GOLD
-**A2, _**A4	A-42385-**A2	94V-2		
-**B1, _**B3	A-42385-**B1	94V-0		TIN
-**A1, -**A3	A-42385-**A1	94V-2		

ADD BACK VIEW
EC NO: UCP2017-0438 2016/08/23
DRWN:CSLAFTER 2016/08/23
CHKD:JBELL
APPR:FSMITH 2016/09/21
DESCRIPTION
T3
REV

QUALITY SYMBOLS
E =0
E =0
E =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY	RWK
DATE	2/7/89
CHECKED BY	RJF
DATE	2/7/89
APPROVED BY	FSMITH
DATE	2011/11/01
MATERIAL NO.	SEE SHEET 3


TITLE: MINI-FIT JR. 2-24 CKT RIGHT ANGLE HEADER ASSY (BLIND MATE)

molex MOLEX INCORPORATED


DOCUMENT NO.: SDA-42404-****
SHEET NO.: 1 OF 3

SIZE C


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

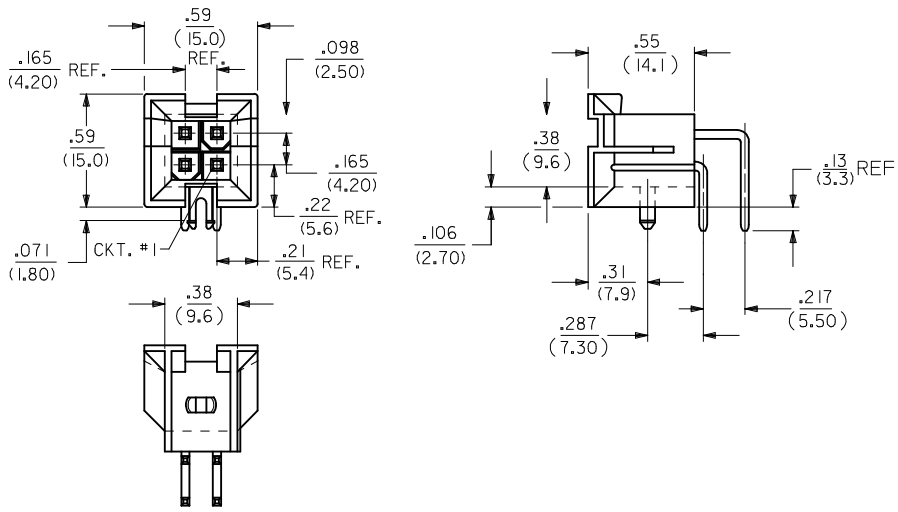


A-42404-04**

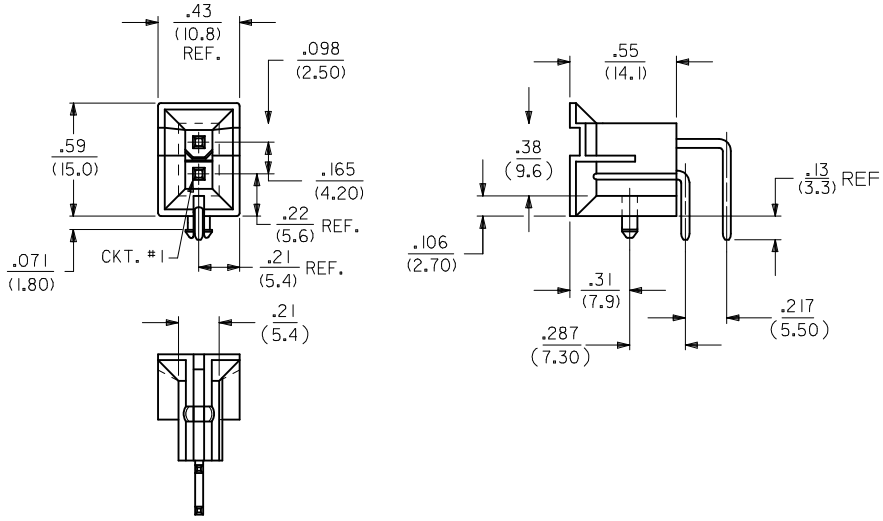


A-42404-02**

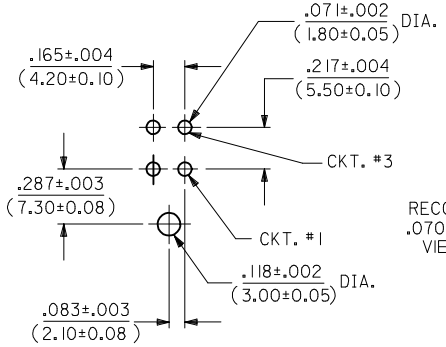

RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD
VIEWED FROM COMPONENT SIDE

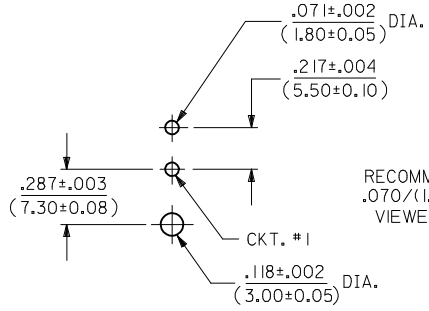

RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD
VIEWED FROM COMPONENT SIDE

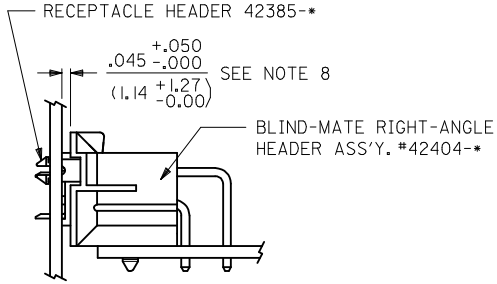

PANEL-TO-P.C.BOARD

SEE RECEPTACLE DRAWINGS FOR
ADDITIONAL MATING CONFIGURATIONS

SEE SHEET 1
EC NO: UCP2017-0438 2016/08/23
DRWN:CSLAFTER 2016/08/23
CHKD:JBELL
APPR:FSMITH 2016/09/21
DESCRIPTION
REV
T3

QUALITY SYMBOLS
F1 =0
F2 =0
F3 =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	RWK	2/7/89
CHECKED BY	RJF	2/7/89
APPROVED BY	FSMITH	2011/11/01

TITLE: MINI-FIT JR. 2-24 CKT
RIGHT ANGLE HEADER ASSY
(BLIND MATE)

MOLEX INCORPORATED

MATERIAL NO.: SEE SHEET 3
DOCUMENT NO.: SDA-42404-****
SHEET NO.: 2 OF 3
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

tb_frame_C_P_AM_T
Rev. F 2009/06/18

PART NUMBER	ENG. NUMBER	CKT. SIZE	HOUSING MATERIAL	PLATING (NOTE 2)
NOT TOOLED	A-42404-02A1	2	94V-2	MATTE TIN OVER NICKEL
15-24-6040	-04A1	4		
15-24-6060	-06A1	6		
NOT TOOLED	-08A1	8		
15-24-6100	-10A1	10		
NOT TOOLED	-12A1	12		
15-24-6140	-14A1	14		
NOT TOOLED	-16A1	16		
15-24-6180	-18A1	18		
NOT TOOLED	-20A1	20		
NOT TOOLED	-22A1	22		
15-24-6240	A-42404-24A1	24	94V-2	MATTE TIN OVER NICKEL
NOT TOOLED	A-42404-02A5	02	94V-2	SELECT GOLD OVER NICKEL
15-24-9047	A-42404-04A5	04		
15-24-9067	A-42404-06A5	06		
NOT TOOLED	A-42404-08A5	08		
15-24-9107	A-42404-10A5	10		
NOT TOOLED	A-42404-12A5	12		
15-24-9147	A-42404-14A5	14		
NOT TOOLED	A-42404-16A5	16		
15-24-9187	A-42404-18A5	18		
NOT TOOLED	A-42404-20A5	20		
NOT TOOLED	A-42404-22A5	22		
15-24-9247	A-42404-24A5	24	94V-2	SELECT GOLD OVER NICKEL
NOT TOOLED	A-42404-02B1	2	94V-0	MATTE TIN OVER NICKEL
15-24-9044	-04B1	4		
15-24-9064	-06B1	6		
NOT TOOLED	-08B1	8		
15-24-9104	-10B1	10		
NOT TOOLED	-12B1	12		
15-24-9144	-14B1	14		
15-24-9164	-16B1	16		
15-24-9184	-18B1	18		
NOT TOOLED	-20B1	20		
NOT TOOLED	-22B1	22		
15-24-9244	A-42404-24B1	24	94V-0	MATTE TIN OVER NICKEL
NOT TOOLED	A-42404-02B5	02	94V-0	SELECT GOLD OVER NICKEL
15-24-6043	A-42404-04B5	04		
15-24-6063	A-42404-06B5	06		
NOT TOOLED	A-42404-08B5	08		
15-24-6103	A-42404-10B5	10		
NOT TOOLED	A-42404-12B5	12		
15-24-6143	A-42404-14B5	14		
15-24-6163	A-42404-16B5	16		
15-24-6183	A-42404-18B5	18		
NOT TOOLED	A-42404-20B5	20		
NOT TOOLED	A-42404-22B5	22		
15-24-6243	A-42404-24B5	24	94V-0	SELECT GOLD OVER NICKEL

PART NUMBER	ENG. NUMBER	CKT. SIZE	HOUSING MATERIAL	PLATING (NOTE 5)

SEE SHEET 1
EC NO: UCP2017-0438
T3
DRWN: CSLAFTER 2016/08/23
CH'KD: JBELL 2016/08/23
APPR: FSMITH 2016/09/21

REV	DESCRIPTION

QUALITY SYMBOLS: E7 = 0, E6 = 0, E5 = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---
ANGULAR	± 1/2°	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM

DRAWN BY: RWK DATE: 2/7/89
CHECKED BY: RJF DATE: 2/7/89
APPROVED BY: FSMITH DATE: 2011/11/01

SIZE: C
MATERIAL NO.: SEE CHART

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE: MINI-FIT JR. 2-24 CKT RIGHT ANGLE HEADER ASSY (BLIND MATE)

SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DOCUMENT NO.: SDA-42404-****
MOLEX INCORPORATED

SHEET NO.: 3 OF 3