
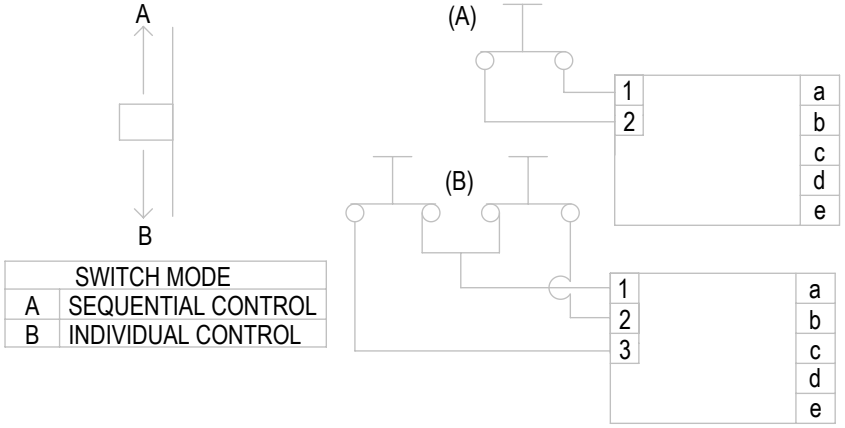



| SWITCH MODE | |
|---|---|
| A | SEQUENTIAL CONTROL |
| B | INDIVIDUAL CONTROL |

| LABEL | WIRE | FUNCTION |
|---|---|---|
| a | ORANGE | LOAD 1 |
| b | RED | LOAD 2 |
| c | BLACK | LINE |
| d | WHITE | LINE AND LOAD |
| e | YELLOW/GREEN | GROUND |
| 1 | BLACK | COMMON |
| 2 | BROWN | SWITCH 1 |
| 3 | GREY | SWITCH 2 |

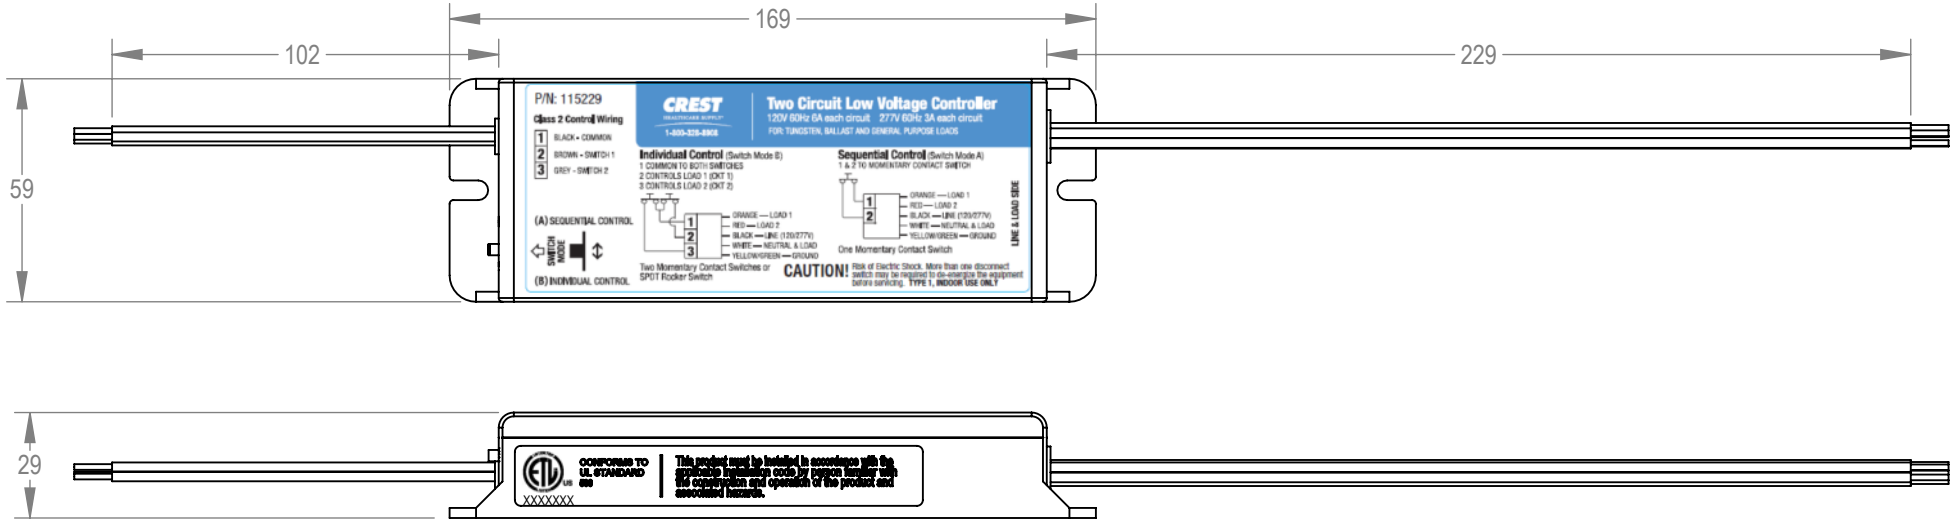


SPECIFICATIONS:
INPUT VOLTAGE: 120V 60Hz 6A
277V 60HZ 3A
FOR TUNGSTEN, BALLAST AND GENERAL PURPOSE LOADS
OUTPUT VOLTAGE: 120V-277V 60Hz
ETL LISTED (CONFORMS TO UL STD. 508)

1, 2, 3 WIRES 18 AWG, AWM 1007 INSULATED, VW-1 FT 1 RATED
REMAINING WIRES 18 AWG, AWM 1015 INSULATED, VW-1 FT 1 RATED

| | | | |
|---|---|---|---|
| ALL DIMENSIONS ARE IN MM | DRAWN BY BMN | THIS DOCUMENT IS CONFIDENTIAL AND IS THE SOLE PROPERTY OF CREST ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED | |
| TOLERANCES UNLESS SPECIFIED X ± .51, X.X ± .25, X.XX ± .13, < ±1° | DATE 12/02/20 | CREST ELECTRONICS | |
| | APPROVED BY BMN | DESCRIPTION CONTROLLER, LOW VOLTAGE, 2 CIRCUIT | |
| THIRD ANGLE PROJECTION | DATE 12/02/20 | SIZE A | DWG. NO. 115229-ND / REV. 01 |
| | SCALE: NTS | SHEET 1 OF 1 | |