



SAP-NUMBER	OLD PART NUMBER	FINISHED LENGTH
1201130014	BEY801P-FBP-05	5000
1201130015	BEY801P-FBP-10	10000

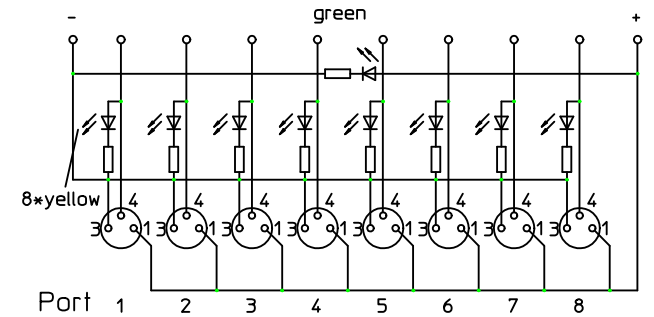

Contact configuration	wire colour	wire mm ²	Port	M8 connector Contact-No.
	brown (+)	0.75	1-8	1
	blue (-)	0.75	1-8	3
	white	0.34	1	4
	green	0.34	2	4
	yellow	0.34	3	4
	grey	0.34	4	4
	pink	0.34	5	4
	red	0.34	6	4
	black	0.34	7	4
	violet	0.34	8	4

CLOSURE CAP

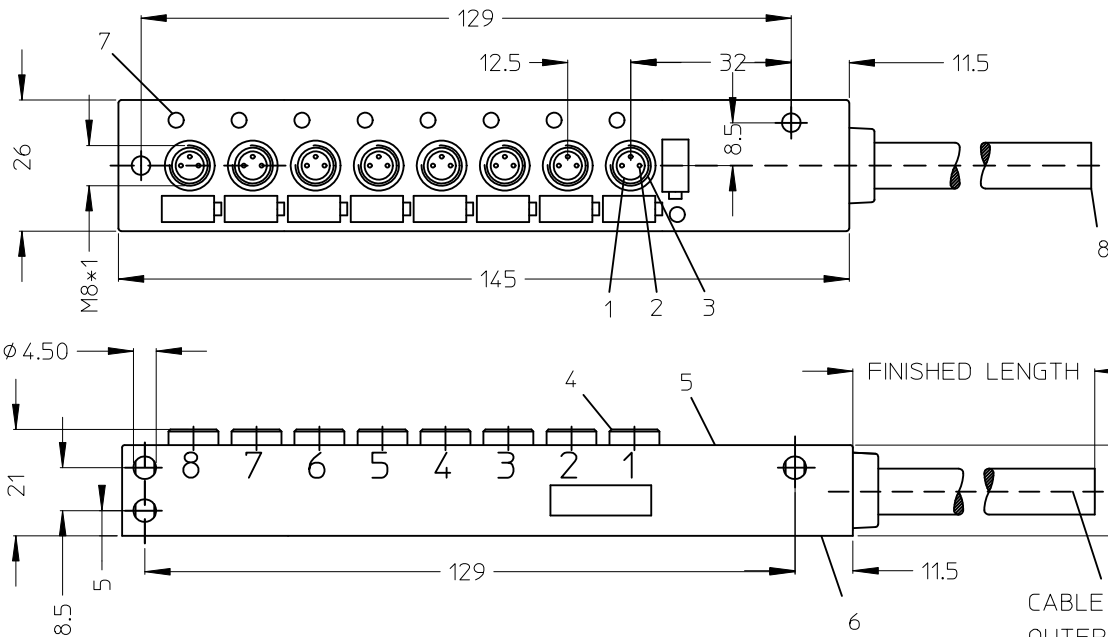

SAP no. 1203080677

Quantity 2

VOLTAGE RATING	10 - 30 VDC
AMPERAGE RATING PER PORT	2 A MAX/PORT 6 A MAX. TOTAL
PROTECTION	IP 67
OPERATING TEMPERATURE	-25°C / +90 °C

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	PUR	BLACK
2	CONTAC SOCKET	BRASS	GOLD OVER NICKEL
3	O-RING	VITON	---
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
7	LENS	PA	CLEAR
8	CABLE	PUR	---

NEW RELEASE	EC NO: WEU2010-0248	2010/01/08	2010/01/08	2010/01/29
DRWN:SBH	CHKD:APOHL_WEU	2010/01/08	2010/01/08	2010/01/29
APPR:NSTAUDIGEL	2010/01/29	2010/01/29	2010/01/29	2010/01/29
REV	A	DESCRIPTION	QUALITY SYMBOLS	

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± 0.3	± ---
ANGULAR	± ---°	
DRAFT WHERE APPLICABLE		
MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	MM ONLY
DRAWN BY	SBH
DATE	2010/01/08
CHECKED BY	DATE
DATE	2010/01/08
APPROVED BY	DATE
DATE	2010/01/29
MATERIAL NO.	
SIZE	A3

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	METRIC	
TITLE		
M8-MPIS 8 PORT CABLE 3 POL STRAIGHT OUTLINE		
MOLEX INCORPORATED		
DOCUMENT NO.	SD-120113-016	SHEET NO.
		1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		