THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
A	00


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	0	–	–	–	–


NOTES:

1.TOOL WILL BEND CABLE TO A RADIUS OF 1/2" AND 3/8" TO THE CENTERLINE OF THE CABLE.

2. M/A-COM PART NUMBER: 2098-5286-54.

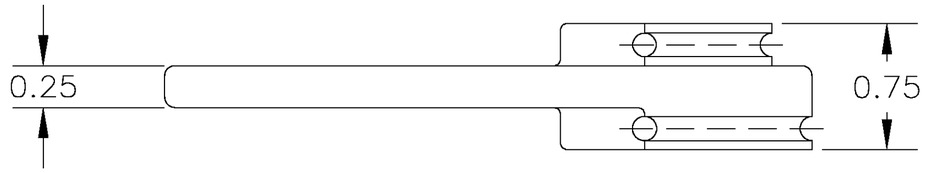

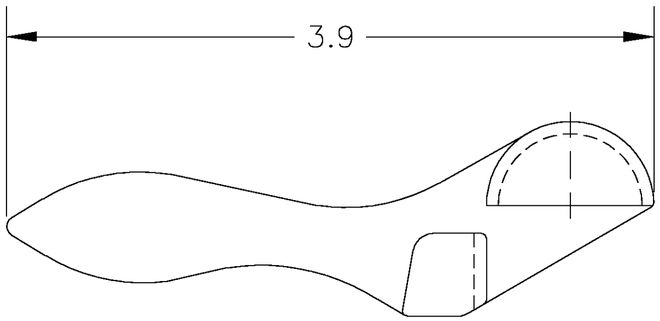

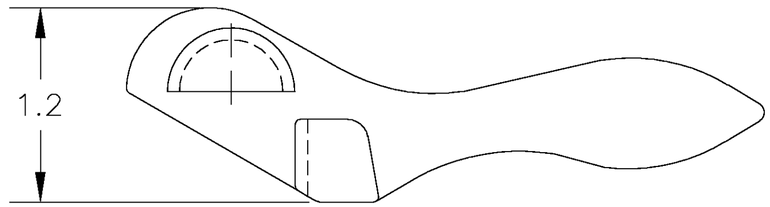

1055478

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± .015
3 PLC ± .005
4 PLC ± .0005
ANGLES ± 1°30'

MATERIAL: BRASS

FINISH: –

DWN	DAVID STULL	03NOV03
CHK	DAVID STULL	03NOV03
APVD	RICHARD SCHAEFFER	03NOV03
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

tyco Electronics — Tyco Electronics Corporation, Harrisburg, PA 17112

NAME: CABLE BENDER FOR .141 S-R COAXIAL CABLE –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1055478	–

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV O