AMP INCORPORATED
HARRISBURG, PA., U.S.A.

A-MP★ EXTRACTION TOOL 91037-2 FOR MODIFIED FORK CONTACTS ON .156 INCH CENTERS

IS7337	
RELEASED	9-23-67
REVISED	2-5-71

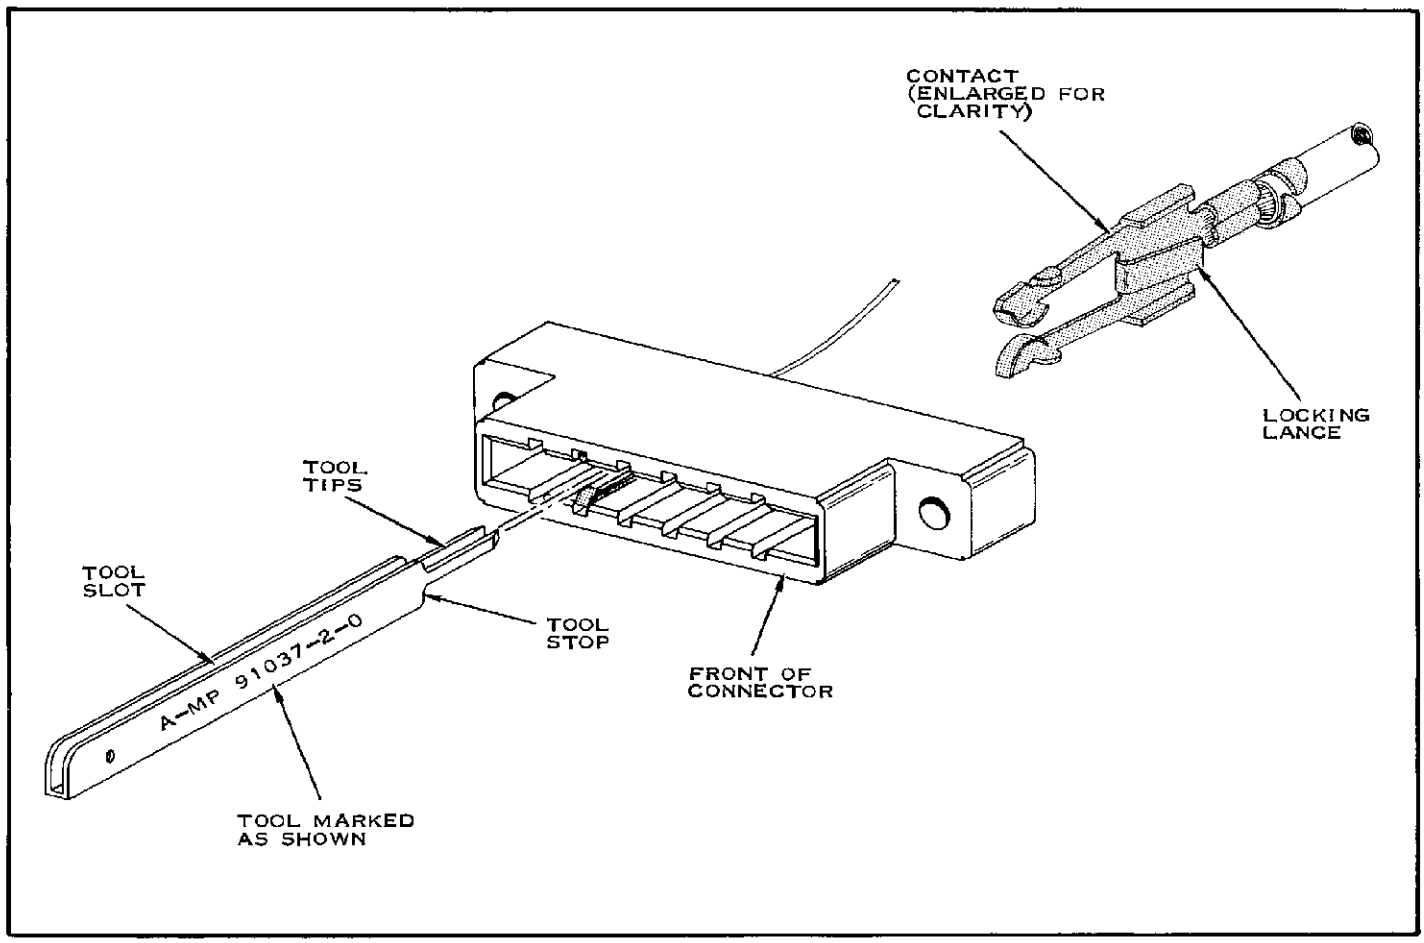


FIGURE 1

1. INTRODUCTION

The A-MP Extraction Tool 91037-2 is designed to remove Modified Fork Contacts from Connectors having .156 inch centers. The tool can be used with the Slot UP (as shown) or DOWN.

2. EXTRACTION PROCEDURE

Determine the contact to be removed then proceed as follows:

1. Align the tool so that contact will enter between the Tool Tips as shown in Figure 1.
2. Insert the Tool Tips straight into the cavity until the Tool Stop bottoms on the Connector.
3. Remove the contact by pulling back gently on the applicable wire. The contact will come out easily.
4. Remove the tool from the connector.

© 1967, 1971 by AMP Incorporated. All international rights reserved. A-MP ™ products covered by U.S. and foreign patents and/or patents pending.

★TRADEMARK OF AMP INCORPORATED