


CB Series

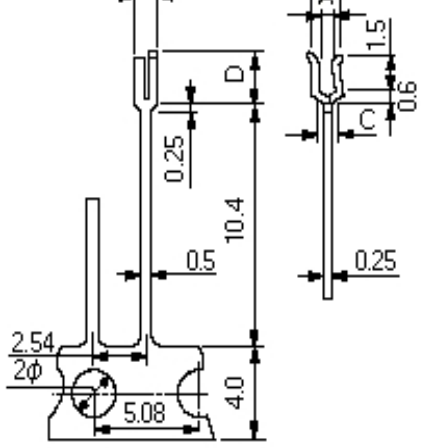

CB-1-1, 1-2, 1-3

>> request quote / information | >> download specs

Carrier tape, pitch=2.54mm

- This terminal is used by holding PCB.
- Cut a piece off from the reel after holding.
- Finish....Sn plating over Ni
- Material....Phosphorus bronze

Save To Favorites
Download Catalog

Ask a Question

Pre-Production Quote Request


Request Sample

ADD TO CART


N/O	A (mm)	B (mm)	C (mm)	D (mm)	Board Thicknes (mm)
CB-1-1	0.6	1.1	0.8	2.4	0.635
CB-1-2	0.7	1.3	1.0	2.4	0.8
CB-1-3	0.9	1.5	1.2	2.1	1.0
CB-1-4	1.1	1.8	1.5	3.3	1.2
CB-1-5	1.5	2.2	1.8	3.3	1.6
CB-2-1	0.55	0.8	2.0		0.635
CB-2-2	0.7	1.0	1.85		0.8
CB-2-3	0.9	1.2	1.65		1.0
CB-2-4	1.1	1.4	1.65		1.2
CB-2-5	1.4	1.8	2.0		1.6

Recommended Land Diameter


N/O	A (mm)	B (mm)	C (mm)
CB-1-1	1.5 to 2.0	2.0 to 2.5	2.54
CB-1-2	1.5 to 2.0	2.0 to 2.5	2.54
CB-1-3	1.5 to 2.0	2.0 to 2.5	2.54
CB-1-4	1.5 to 2.0	2.5 to 3.0	2.54
CB-1-5	1.5 to 2.0	2.5 to 3.0	2.54
CB-2-1	2.0	3.0 to 3.5	2.54
CB-2-2	2.0	3.0 to 3.5	2.54
CB-2-3	2.0	3.0 to 3.5	2.54
CB-2-4	2.0	3.0 to 3.5	2.54
CB-2-5	2.0 to 2.2	3.0 to 3.5	2.54

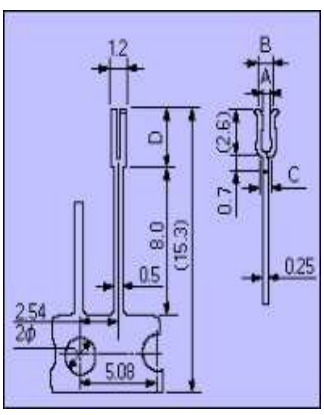


CB-1-4, 1-5

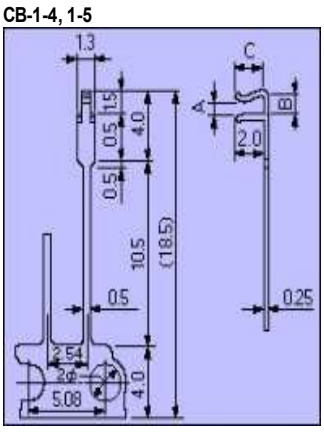

CB-2-1, 2-2, 2-3, 2-4

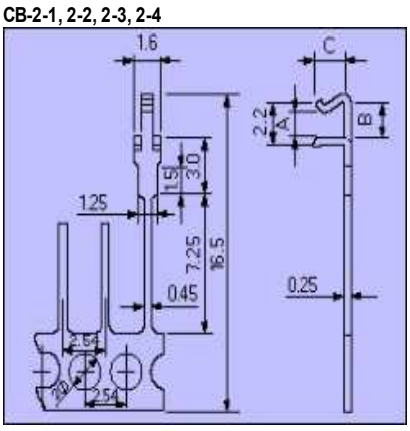

CB-2-5



Pre-Production Quote Request

Copyright © Technology Trading., LTD, All rights Reserve

Downloaded from Arrow.com.