ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	39014033	MiniFitJrPlg SR PnlMnt V-0 3Ckt	2	PC
C	39000124	MiniFit Term Crp Male C Bs Tin 16awg	6	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B3	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	B2	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	B1	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

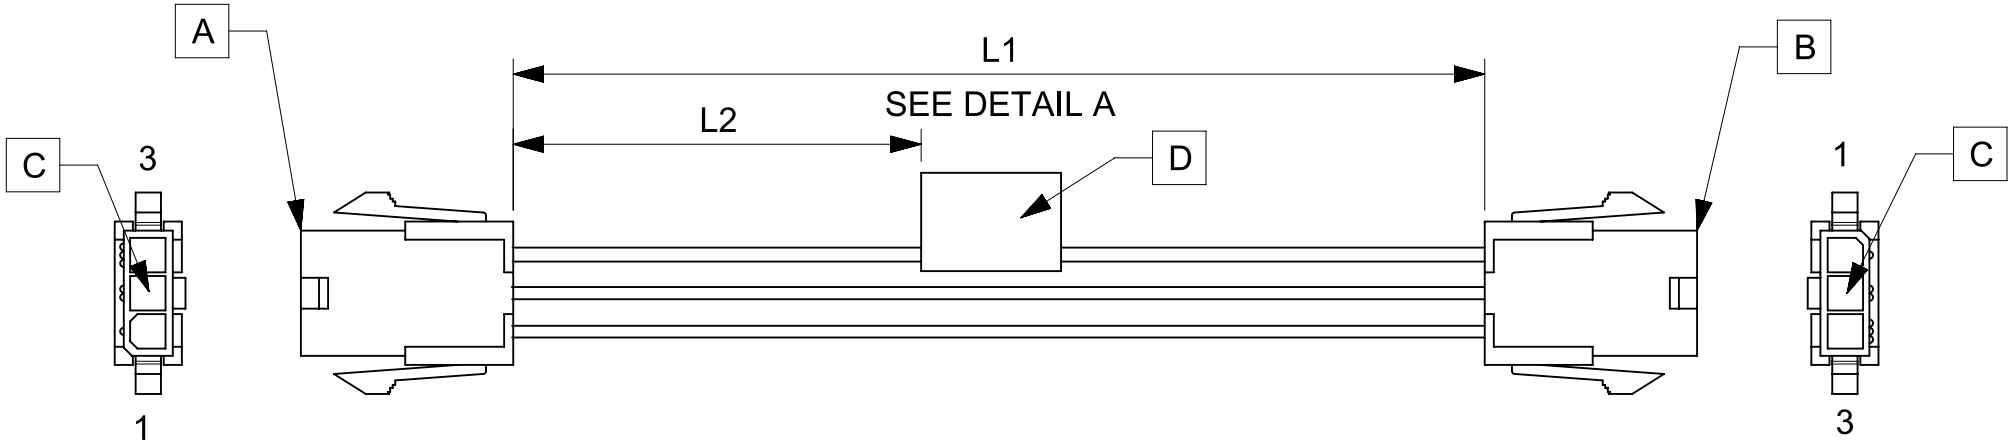


TABLE			
PART NUMBER	L1	L2	TITLE
2153221031	150±8	63 REF	MINIFIT JR SR M-M 3 CIRCUIT 150MM Sn
2153221032	300±10	138 REF	MINIFIT JR SR M-M 3 CIRCUIT 300MM Sn
2153221033	600±10	288 REF	MINIFIT JR SR M-M 3 CIRCUIT 600MM Sn

NOTES
1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FD = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS: mm
SCALE: NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ±	°
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 638380
DRWN: AS20 2020/04/06
CHK'D: RDESAI01 2020/05/28
APPR: RDESAI01 2020/05/28

INITIAL REVISION:
DRWN: AS20 2020/04/06
APPR: RDESAI01 2020/05/28

molex

SEE TABLE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2153221031	PSD	000	A

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	A4-SIZE	215322	SEE TABLE	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2020/05/28 03:12:47

FORMAT: master-tb-prod-A4
REVISION: J
DATE: 2020/01/14