





ASSEMBLY NUMBER	KEYING OPTION	COLOR	CPA	STATUS
34752-0200	A	BLACK		SALEABLE
34752-0201	B	LT. GRAY		CONCEPT ONLY
34752-0202	C	DK. GRAY		CONCEPT ONLY
34752-0203	D	STONE GRAY		CONCEPT ONLY
34752-0204	A	BLACK	X	SALEABLE
34752-0205	B	LT. GRAY	X	CONCEPT ONLY
34752-0206	C	DK. GRAY	X	CONCEPT ONLY
34752-0207	D	STONE GRAY	X	CONCEPT ONLY

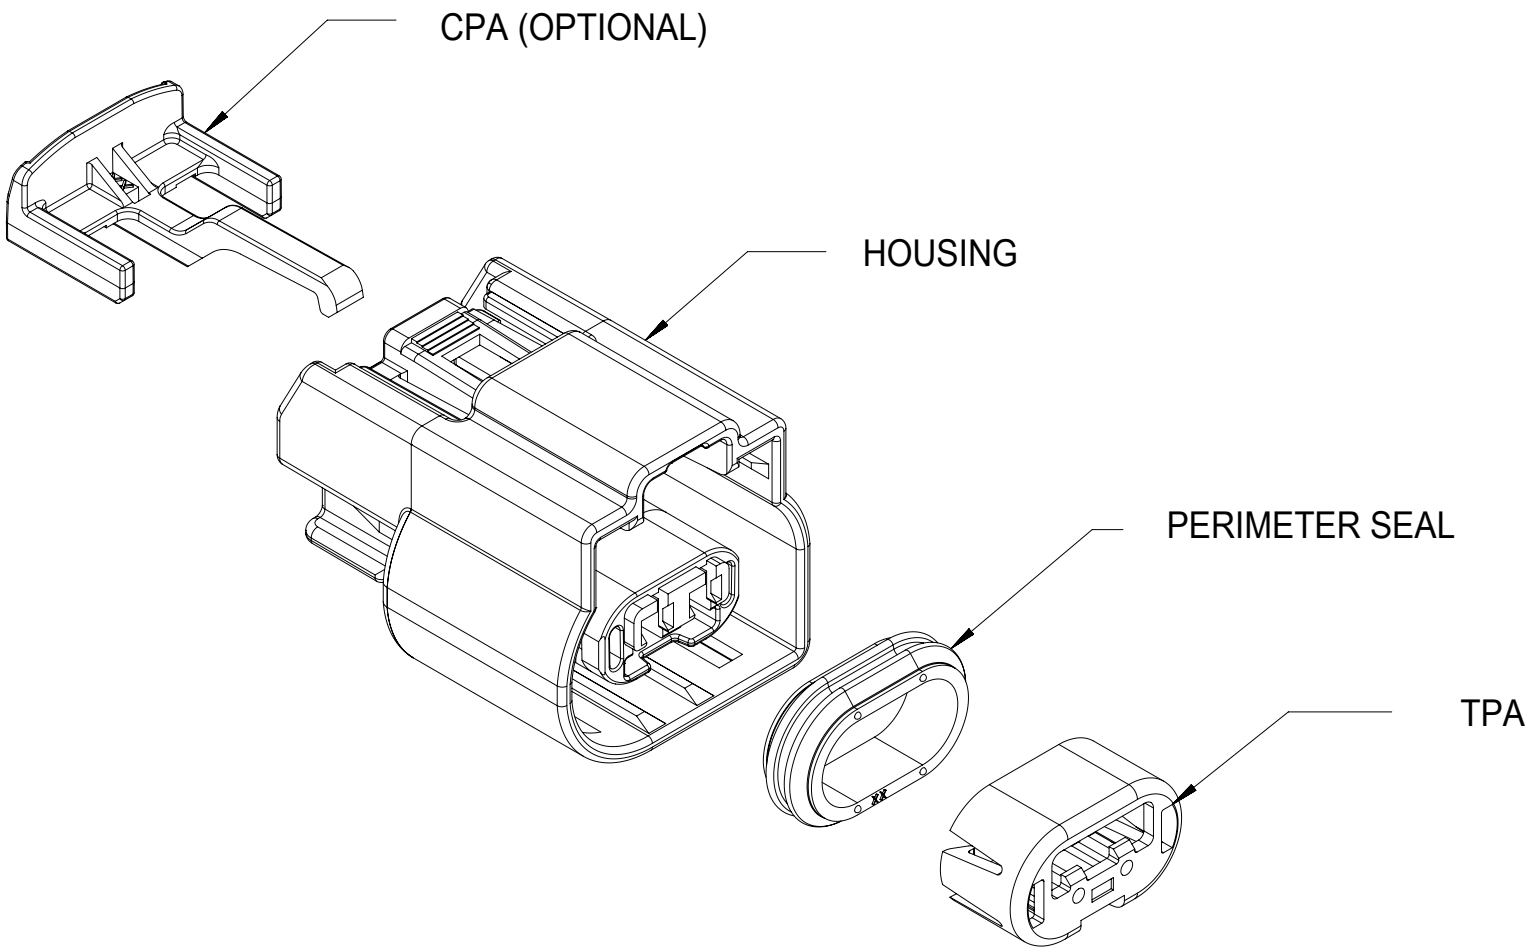


SCALE 1:1

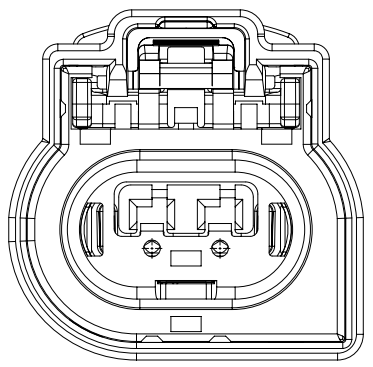


KEYING OPTION A

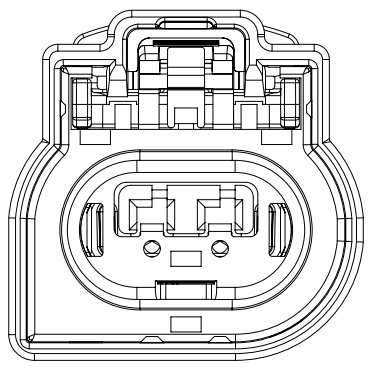

KEYING OPTION B


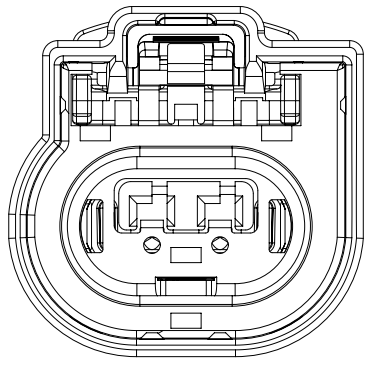


KEYING OPTION C



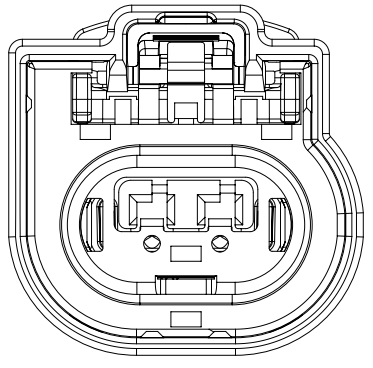


KEYING OPTION D

LASER MARKING APPLIED TO THIS SURFACE TO INCLUDE: MOLEX P/N AND DATE CODE
SEE NOTE 1d

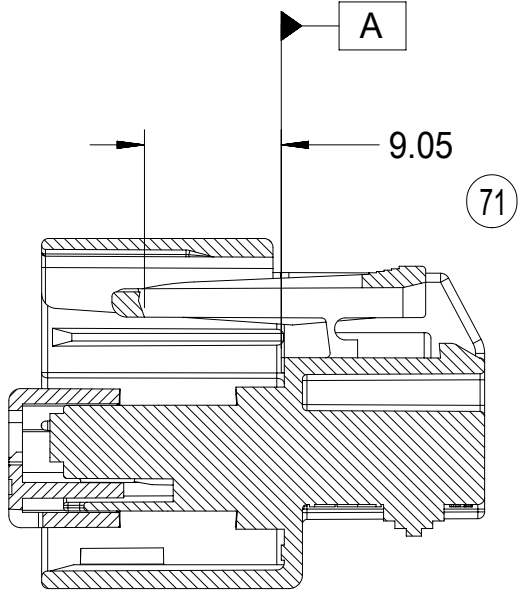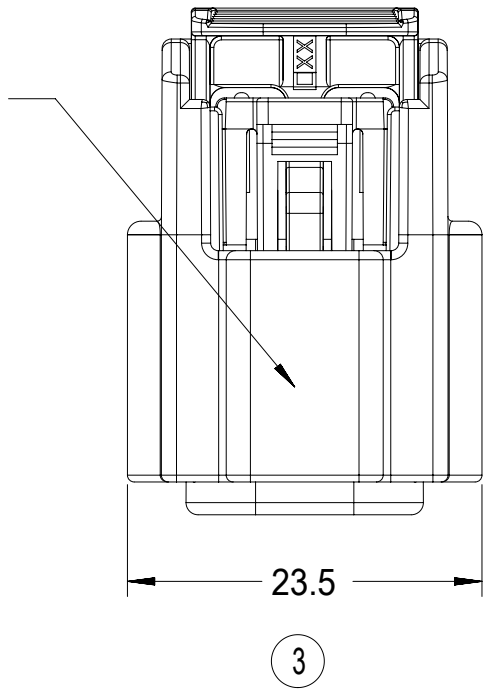

SECTION A-A

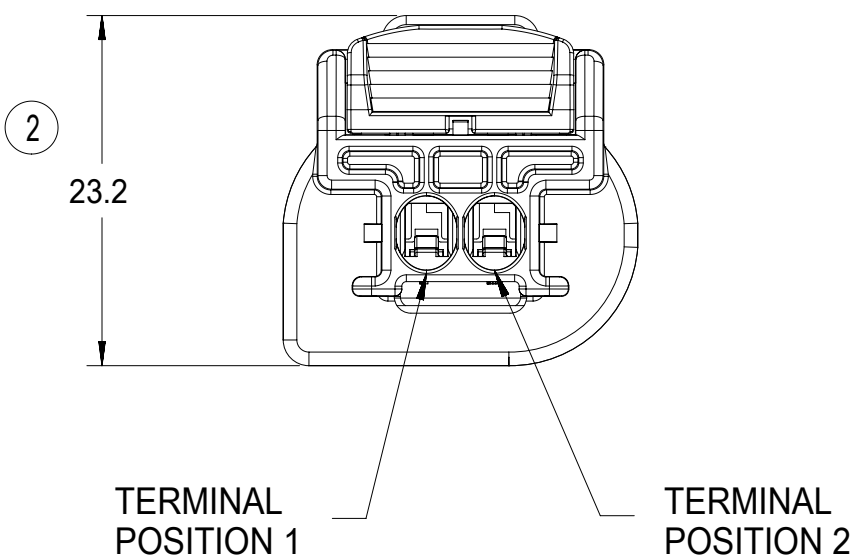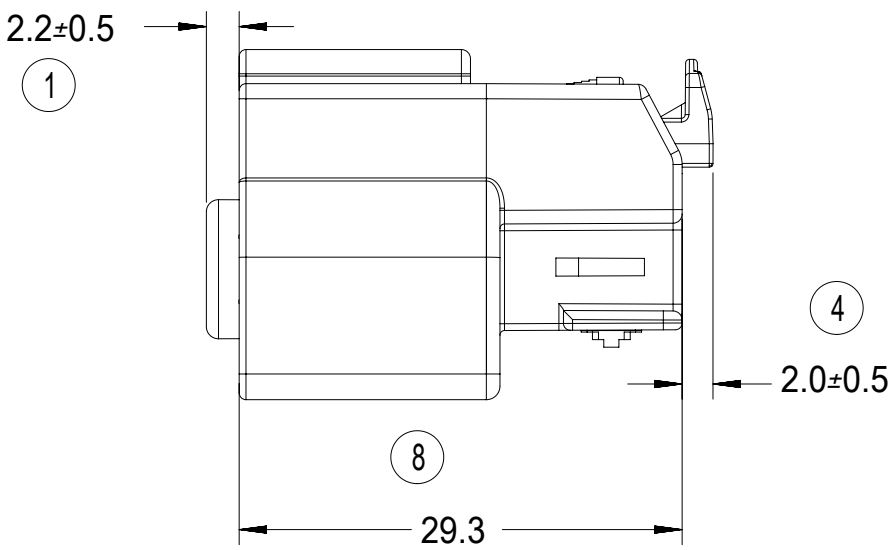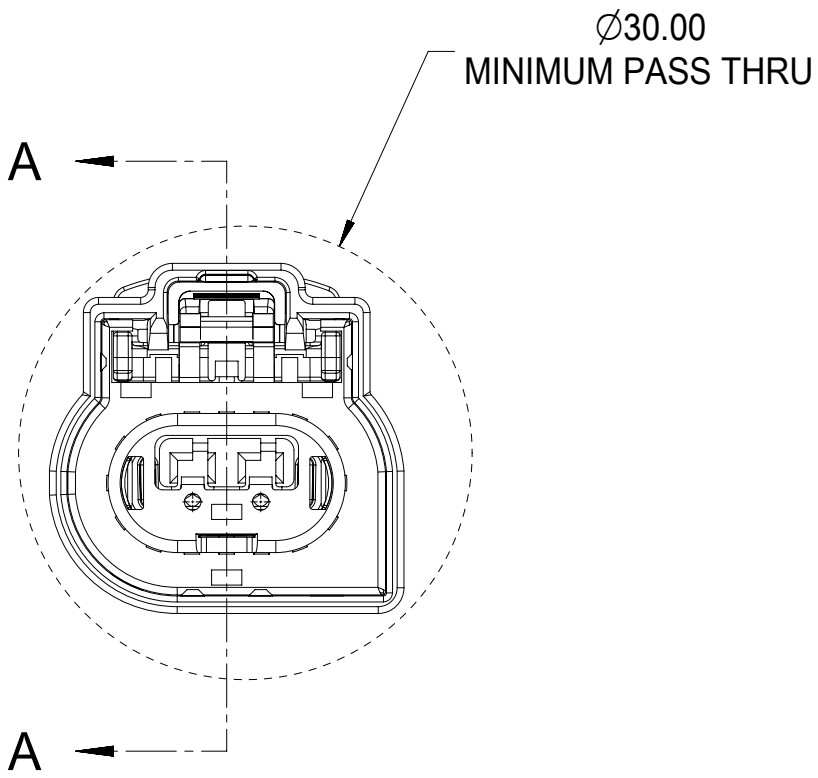

NOTES: VALID UNLESS OTHERWISE SPECIFIED


1. GENERAL:

- a. PRODUCT SPECIFICATION SEE MOLEX DOCUMENT: PS-34752-001
- b. PACKAGING SPECIFICATION PER MOLEX DRAWING: PK-31300-635
- c. APPLICATION SPECIFICATION SEE MOLEX DOCUMENT: AS-34752-001
APP. SPEC. CONTAINS THE FOLLOWING INFORMATION
 - › APPROPRIATE TERMINALS TO BE USED
 - › PLR / CPA USAGE
 - › MATING INTERFACES
- d. DATE CODE: FIRST TWO DIGITS IS CALENDAR YEAR, THIRD THRU FIFTH DIGIT IS DAY NUMBER OF THE CALENDAR YEAR (FEB. 3RD, 2003 = 0341)
- e. PARTS MUST BE IN COMPLIANCE TO MOLEX CHEMICAL SUBSTANCES FOR PRODUCTS AND PACKAGING SPECIFICATION: ES-40000-5016
- f. DATA MUST BE SUBMITTED UNDER THE MOLEX PART NUMBER TO IMDS (COMPANY ID#13255)

2. DESIGN - MATERIALS:

- a. HOUSING: SPS/NYLON BLEND, 20% GLASS FILLED, 20 % MAX REGRIND
COLOR: SEE TABLE
- b. TPA: SPS/NYLON BLEND, 20% GLASS FILLED, 20 % MAX REGRIND
COLOR: NATURAL
- c. CPA: PBT 30% GLASS FILLED, 20% MAX REGRIND
COLOR: RED
- d. PERIMETER SEAL: INHERENTLY LUBRICATED SILICONE, 50 DUROMETER
COLOR: DK BLUE

3. PACKAGING: IN THE EVENT THAT INERT IS FOUND IN THE SEATED (FINAL LOCK) POSITION, REFER TO MOLEX SPECIFICATION PS-34646-001, AVAILABLE AT WWW.MOLEX.COM

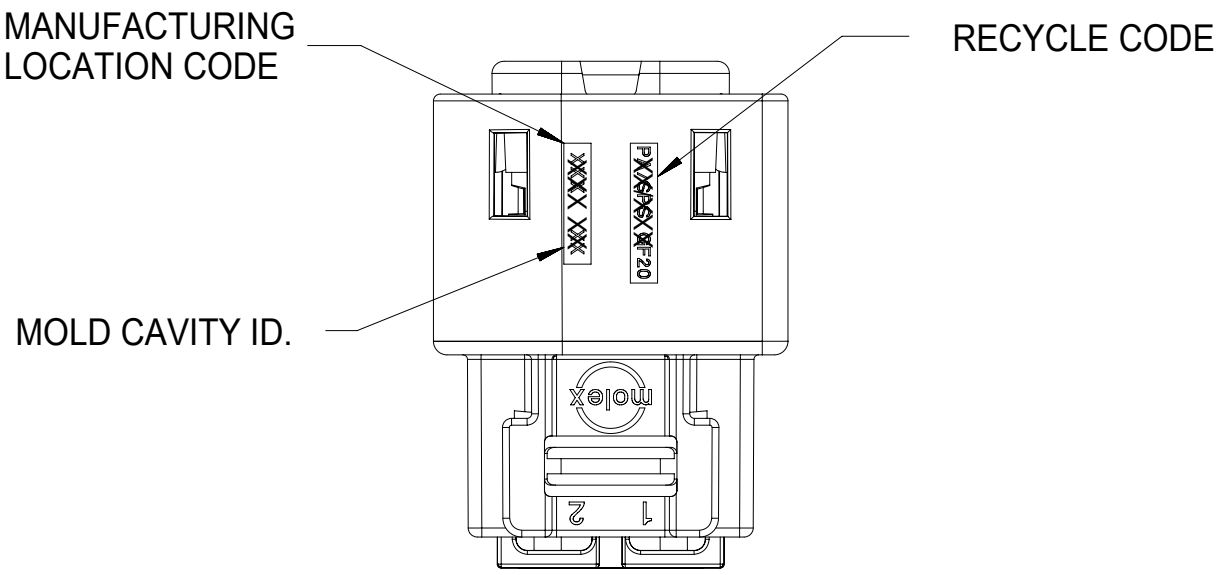

QUALITY SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
 = 0	EC NO: 613666 DRWN: XLDONG03 CHKD: JDENG02 REV APPR: JDENG02 E2	2019/03/13 2019/03/15 2019/03/15	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS		SCALE		 MX150 CABLE SEAL SINGLE ROW, RECEPTACLE 1X2, ASSEMBLY PRODUCT CUSTOMER DRAWING			
 = 0				MM		2:1					
 = 0				ANGULAR TOL ± 3.0 °		DRWN BY DATE					
 = 0				4 PLACES ±		M.VANSLAMBRO 9/16/08					
 = 0				3 PLACES ±		CHK'D BY DATE					
 = 0				2 PLACES ± 0.1		S.VERZYL 9/16/08					
 = 0				1 PLACE ± 0.2		APPR BY DATE					
 = 0				0 PLACES ±		V.KOSHY 9/16/08					
 = 0				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE					
 = 0						THIRD ANGLE PROJECTION					
 = 0					34752		SEE TABLE				GENERAL MARKET
 = 0					DOCUMENT NUMBER		DOC TYPE		DOC PART		
 = 0					SD-34752-020		PSD		000		
 = 0									SHEET NUMBER		
 = 0									1 OF 2		

