



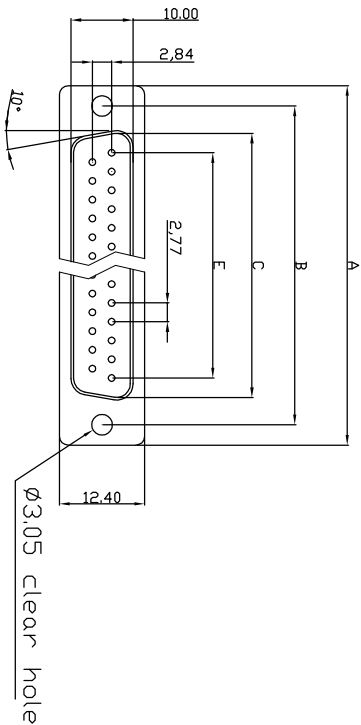


	1	2	3	4	5	6	7	
--	---	---	---	---	---	---	---	--

Male

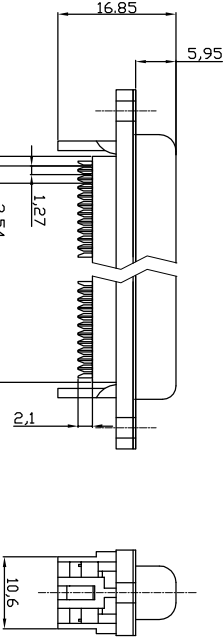

Cover



With Insulator Support

Strain Relief

Positions	A	B	C	E	F
9	30.50	25.00	18.05	11.08	13.10
15	39.00	33.32	26.35	19.39	20.70
25	53.08	47.04	40.95	33.24	33.68
37	69.25	63.50	56.75	49.86	50.30

A-DXF xx LP1II/FP
 Contact style: —
 I - Insulable
 S - Male
 No. of Contacts
 09 / 15 / 25 / 37
 Standard Quality class III

RoHS compliant
 Unit: mm

 File No.: E198287




Scale	Free	⑤	Update the dimension	22.09.2015	Winnie				Customer-No.	G	
TOLERANCE		④	Update the dimension	27.02.2015	Winnie	Drawn	15.08.2012	Lucas	ASSMANN WSW-No. A-DXF xx LP1II/FP		
X.	±0.38					Approved	22.09.2015	Winnie			
X.X	±0.25	③	Update the dimension	09.07.2014	Winnie						
X.XX	±0.13	②	Update the wire specification	28.06.2013	Winnie						
DIM	TOL									Drawing-No.	
X. °	±3°	①	Add the wire specification	06.03.2013	Winnie	ASSMANN WSW/ components			ASS 4890 CO	rev05	
X.X°	±1.0°	①	Drawn	15.08.2012	Lucas				Replace	Sheet 1/2	H
Angle	TOL	Id.	Modification	Date	Name						

ASSMANN
 WSW/ components

	1	2	3	4	5	6	7	
--	---	---	---	---	---	---	---	--

	1	2	3	4	5	6	7	
--	---	---	---	---	---	---	---	--

Female

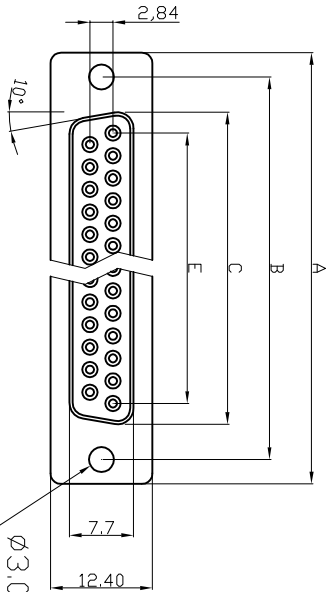

Product Specification


Material

Insulator : Glass-Filled Thermoplastic PBT, UL 94V-0,Black
Contact : Copper alloy, Gold flash selective gold

Electrical



Contact Resistance : 20 milliohmsMax at 1 AMP DC.
Insulation Resistance : 1000 megohms at 500 VDC
Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute
Current Rating : 3 AMP
Voltage Rating : 250 VAC/rms 60Hz
Wire Spec : 26 AWG~28 AWG
Operating Temperature:-55°C+105°C

Cover



Dimensions Positions					
	A	B	C	E	F
9	④ 30.50	24.99	④ 16.00	11.08	10.16
15	④ 39.00	33.30	④ 24.27	19.39	⑤ 20.70
25	53.05	47.04	④ 38.22	33.24	⑤ 33.68
37	69.40	63.50	⑤ 53.50	49.86	⑤ 50.30

Strain Relief

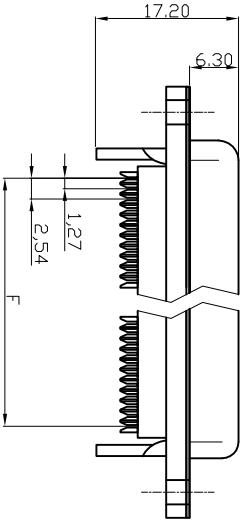

With Insulator Support

RoHS compliant

Unit: mm



File No.: E198287

Scale	Free	⑤	Update the dimension	22.09.2015	Winnie	Customer-No.	
TOLERANCE	④	Update the dimension	27.02.2015	Winnie	Drawn	15.08.2012	Lucas
X.	±0.38	③	Update the dimension	09.07.2014	Winnie	Approved	22.09.2015
X.X	±0.25	②	Update the wire specification	28.06.2013	Winnie		
X.XX	±0.13	①	Add the wire specification	06.03.2013	Winnie		
DIM	TOL	①	Drawn	15.08.2012	Lucas		
X. °	±3°	①					
X.X°	±1.0°	①					
Angle	TOL	Id.	Modification	Date	Name		



ASSMANN WSW-No.
A-DXF xx LP III/FP
Drawing-No.
ASS 4890 CO
Replace
rev05
Sheet 2/2