

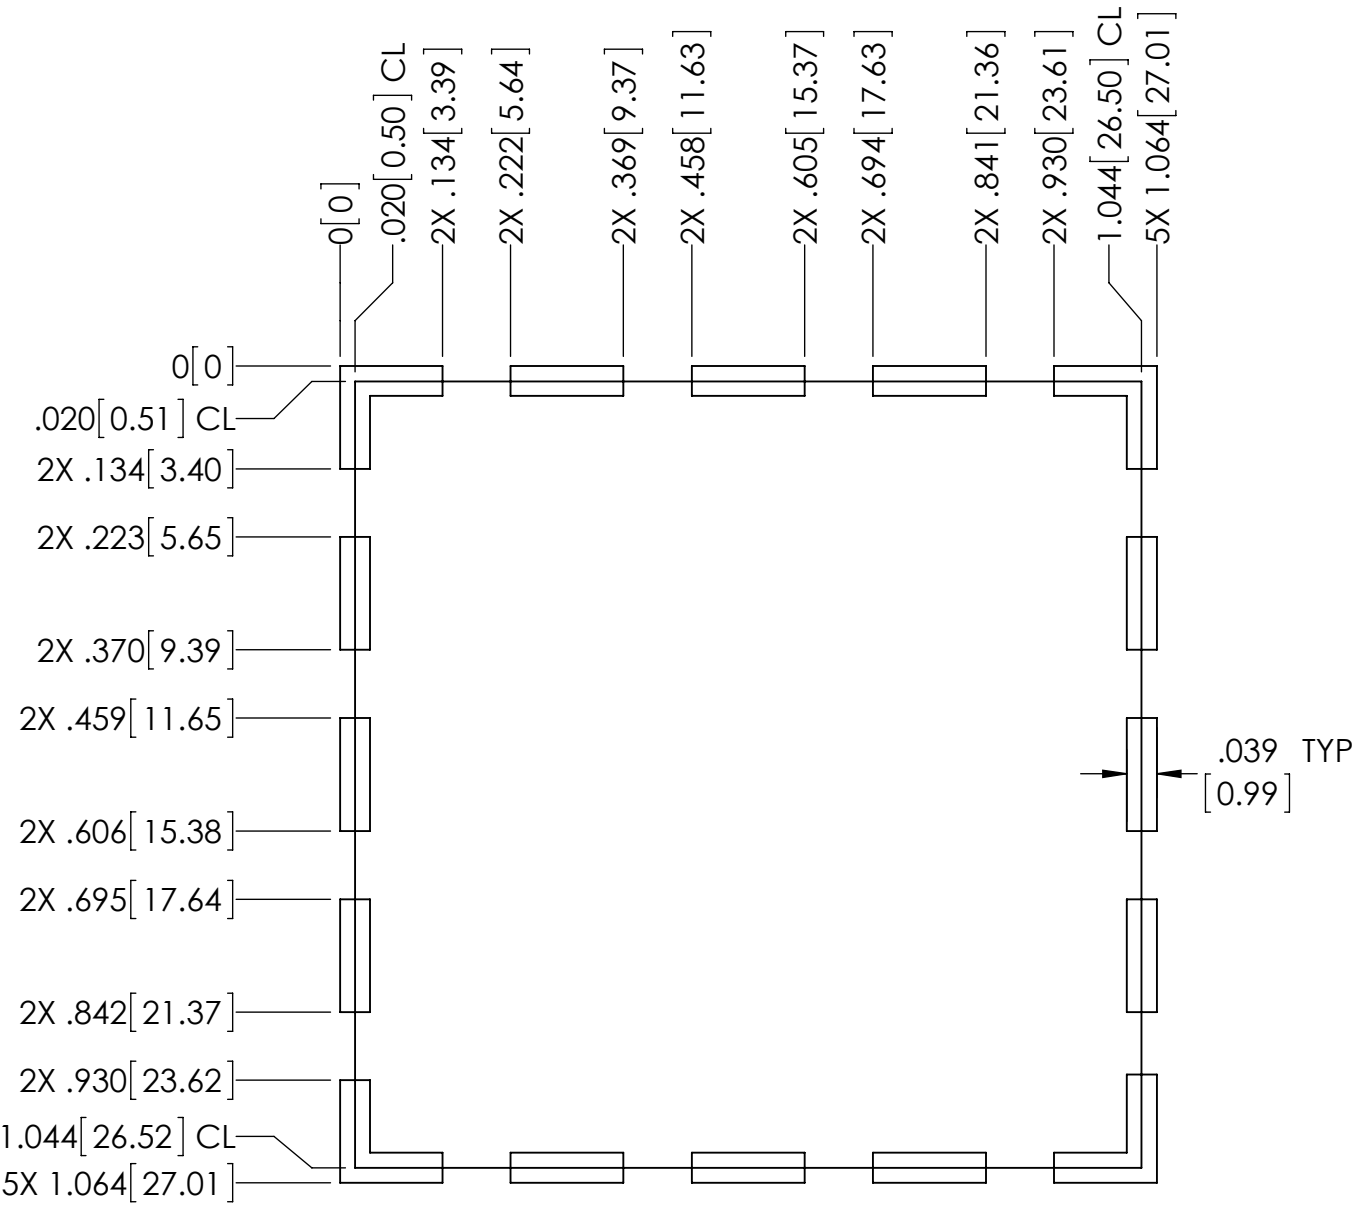
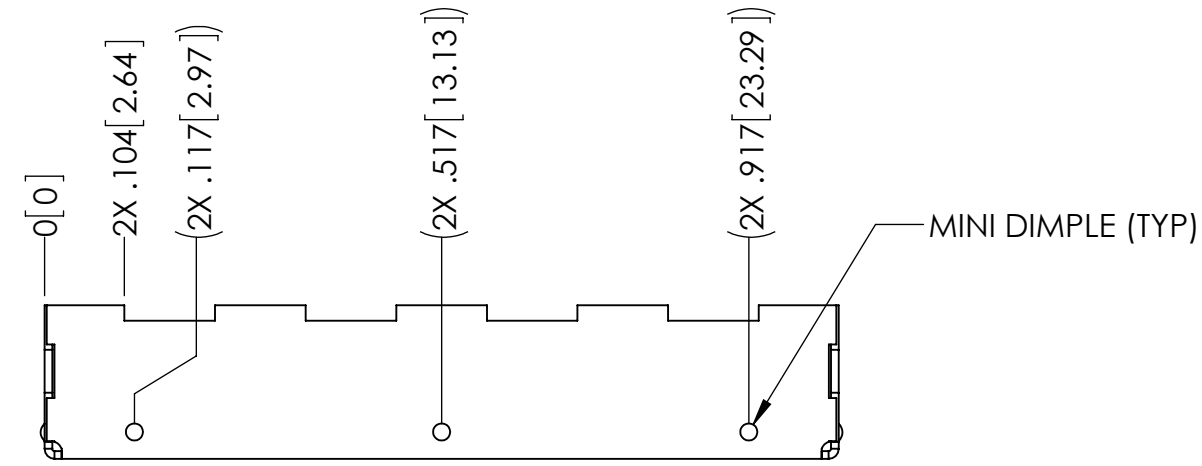
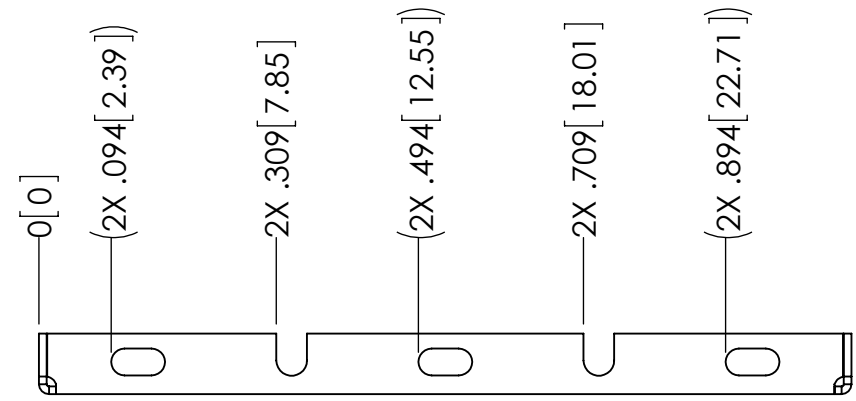
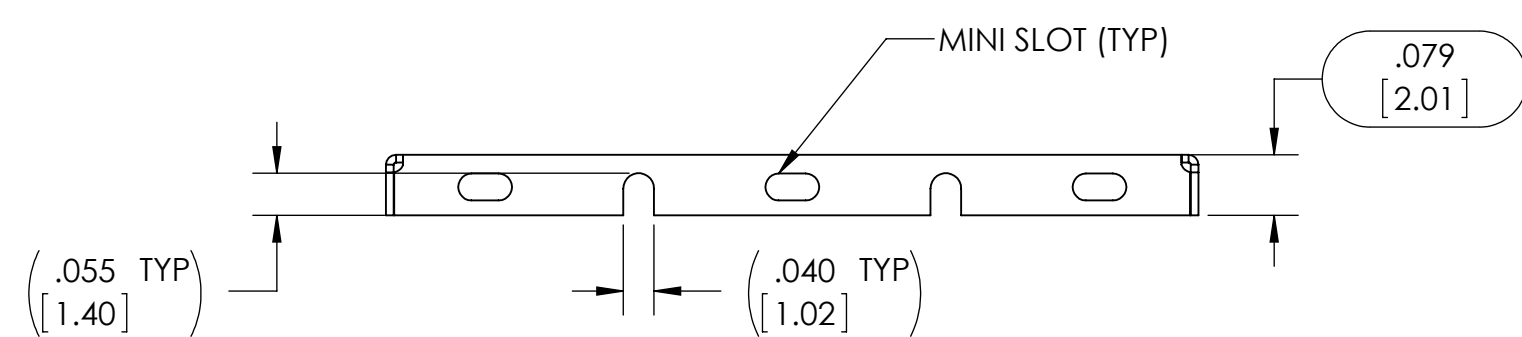
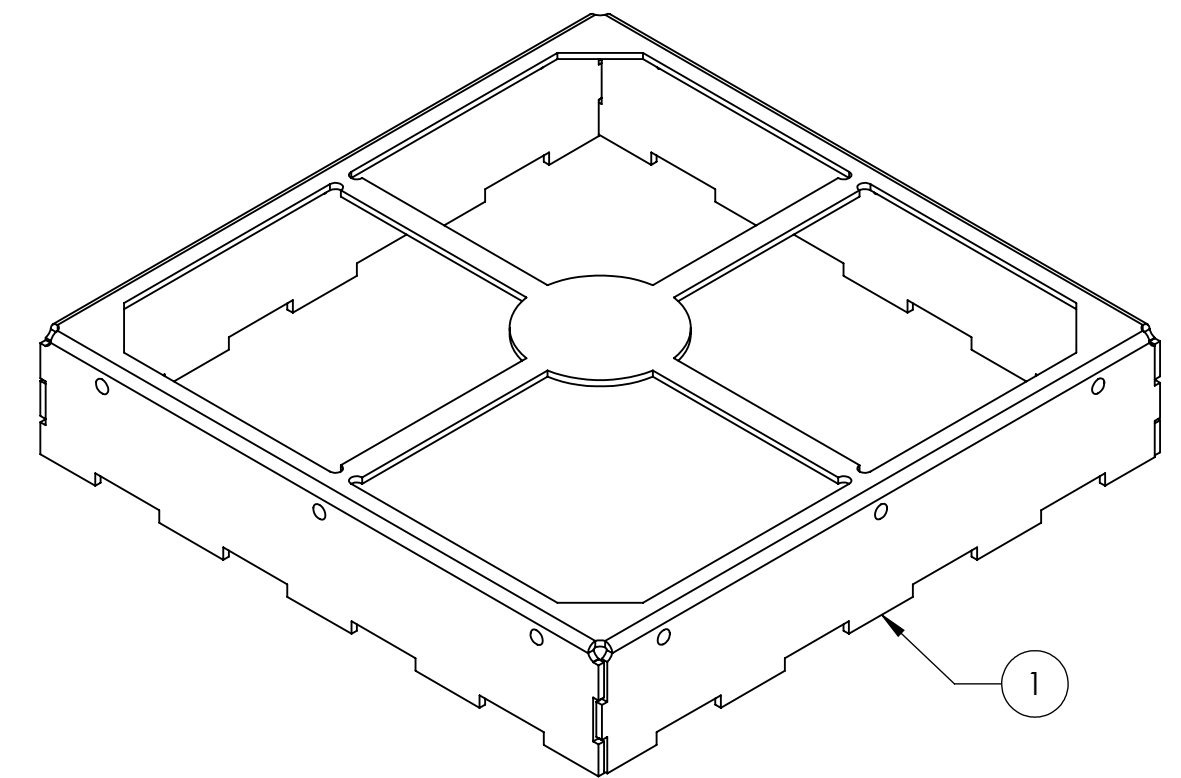
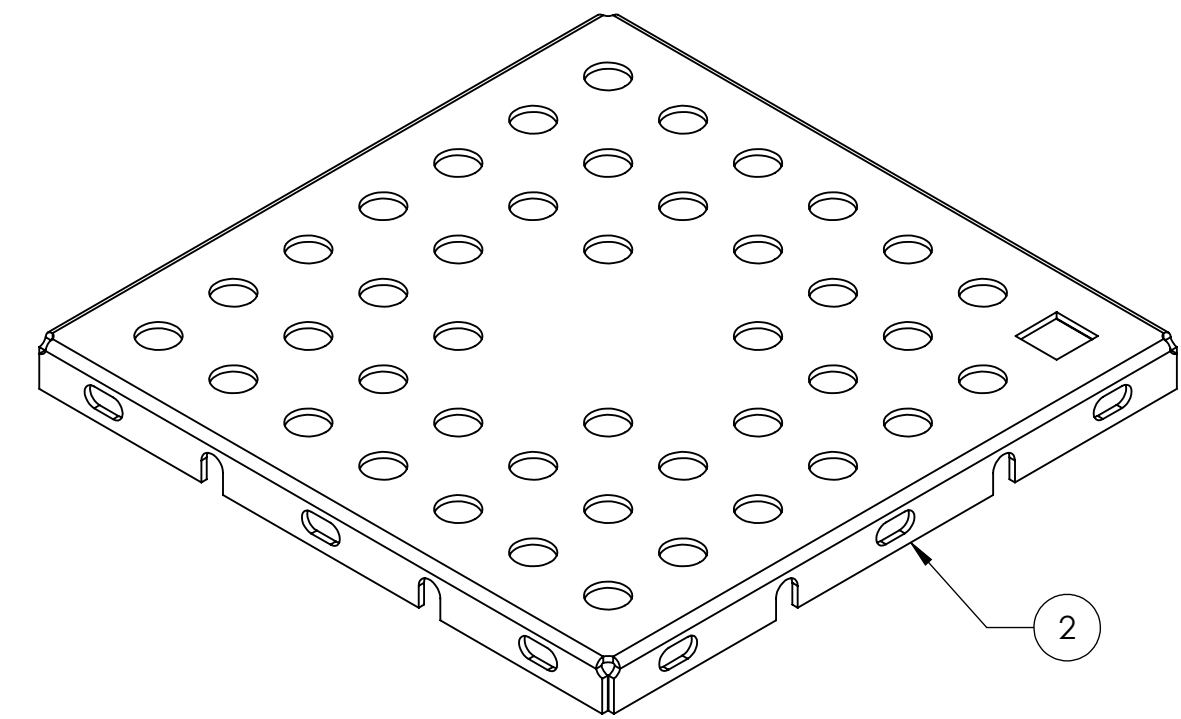
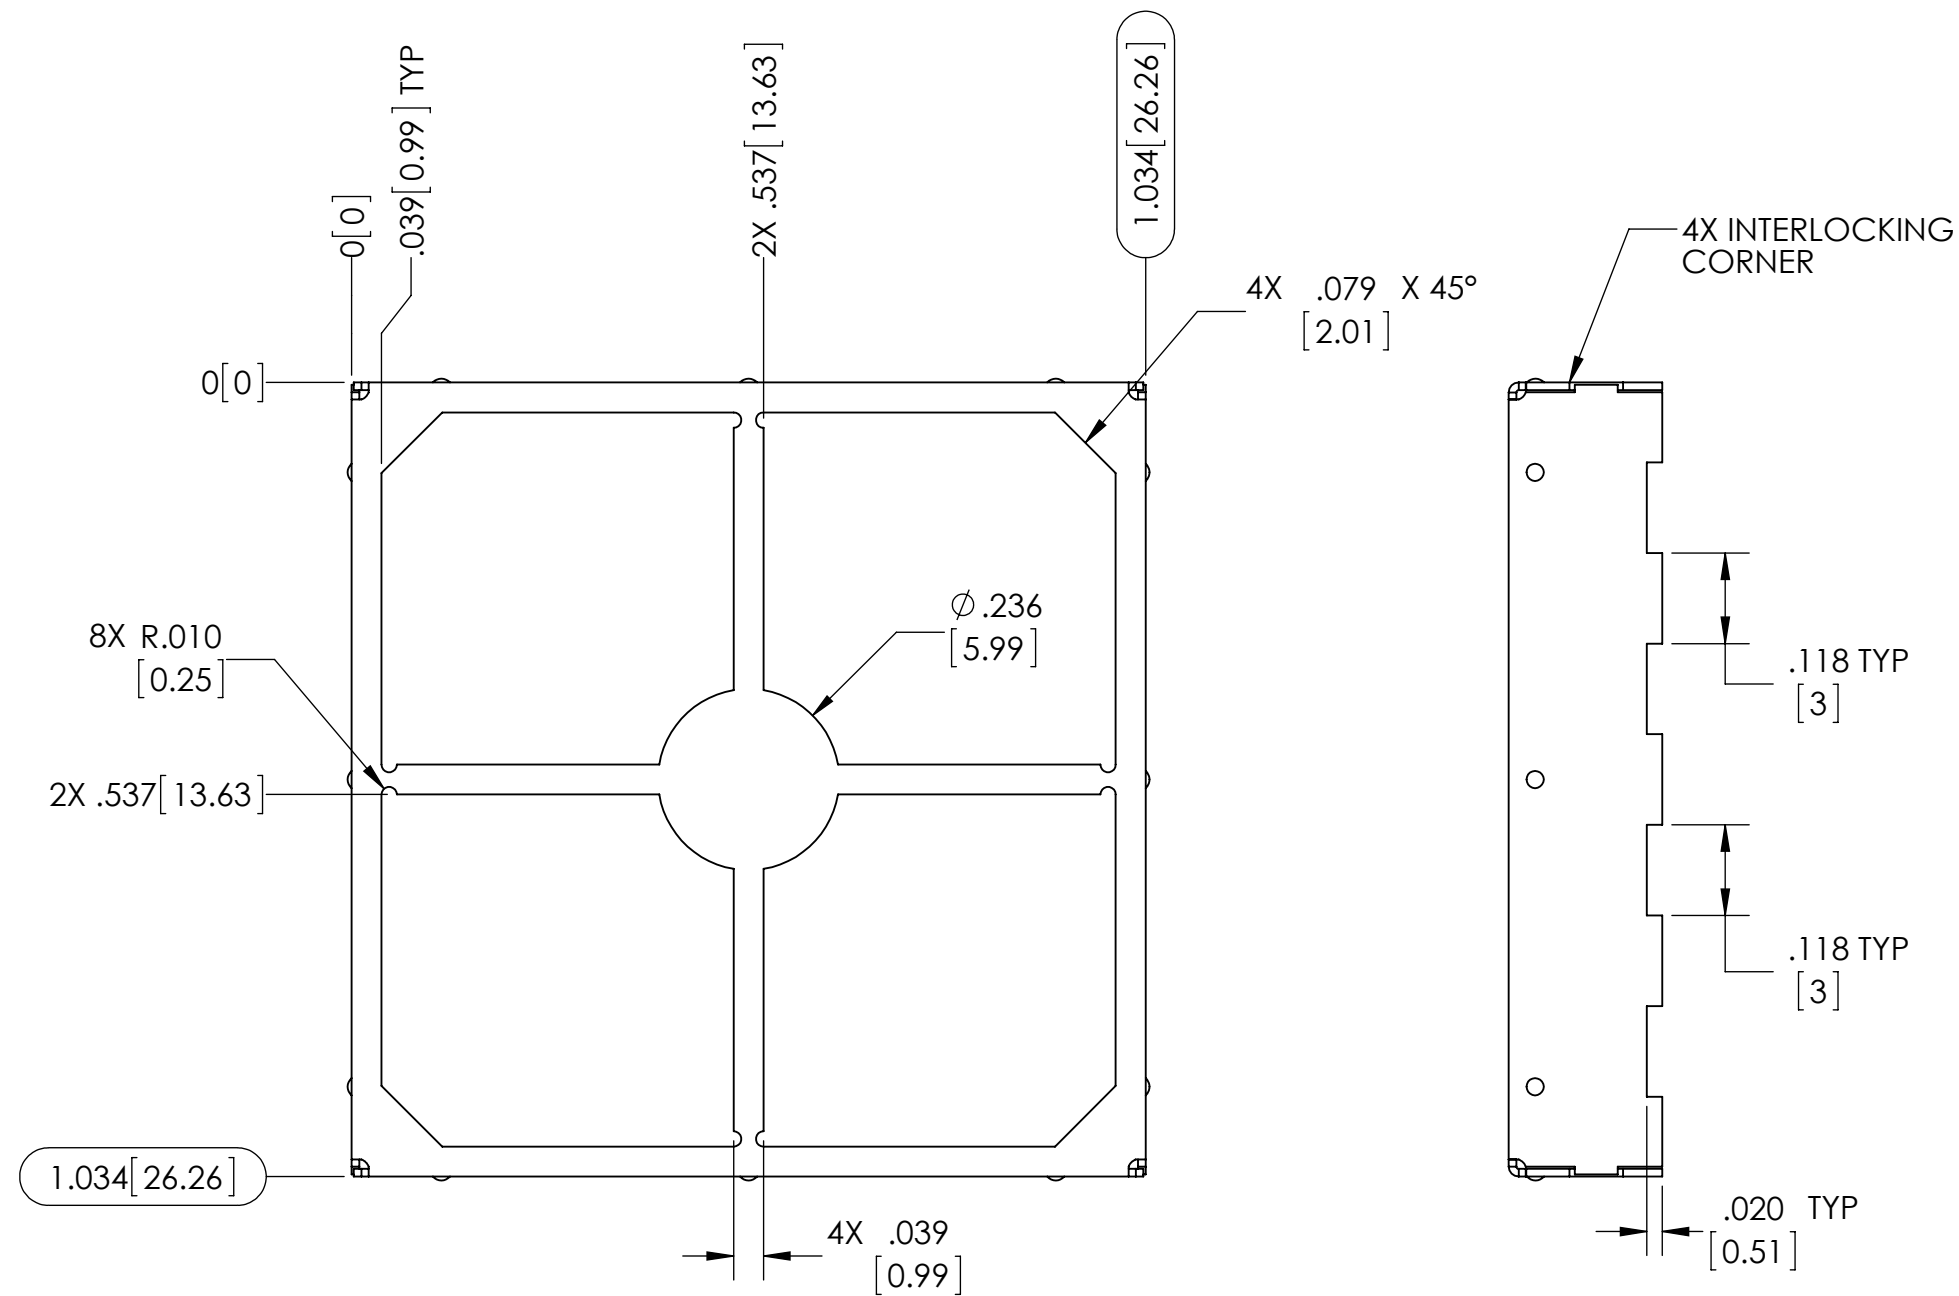



1. ASSURE ASSEMBLY CAPABILITY BY MATCHING WITH MATING PART
2. DIMENSIONS IS [] ARE IN MILLIMETERS

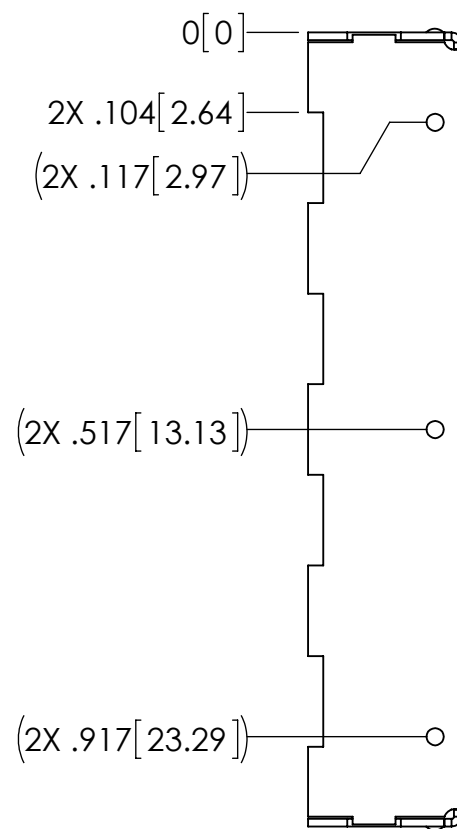


TRACE PATTERN

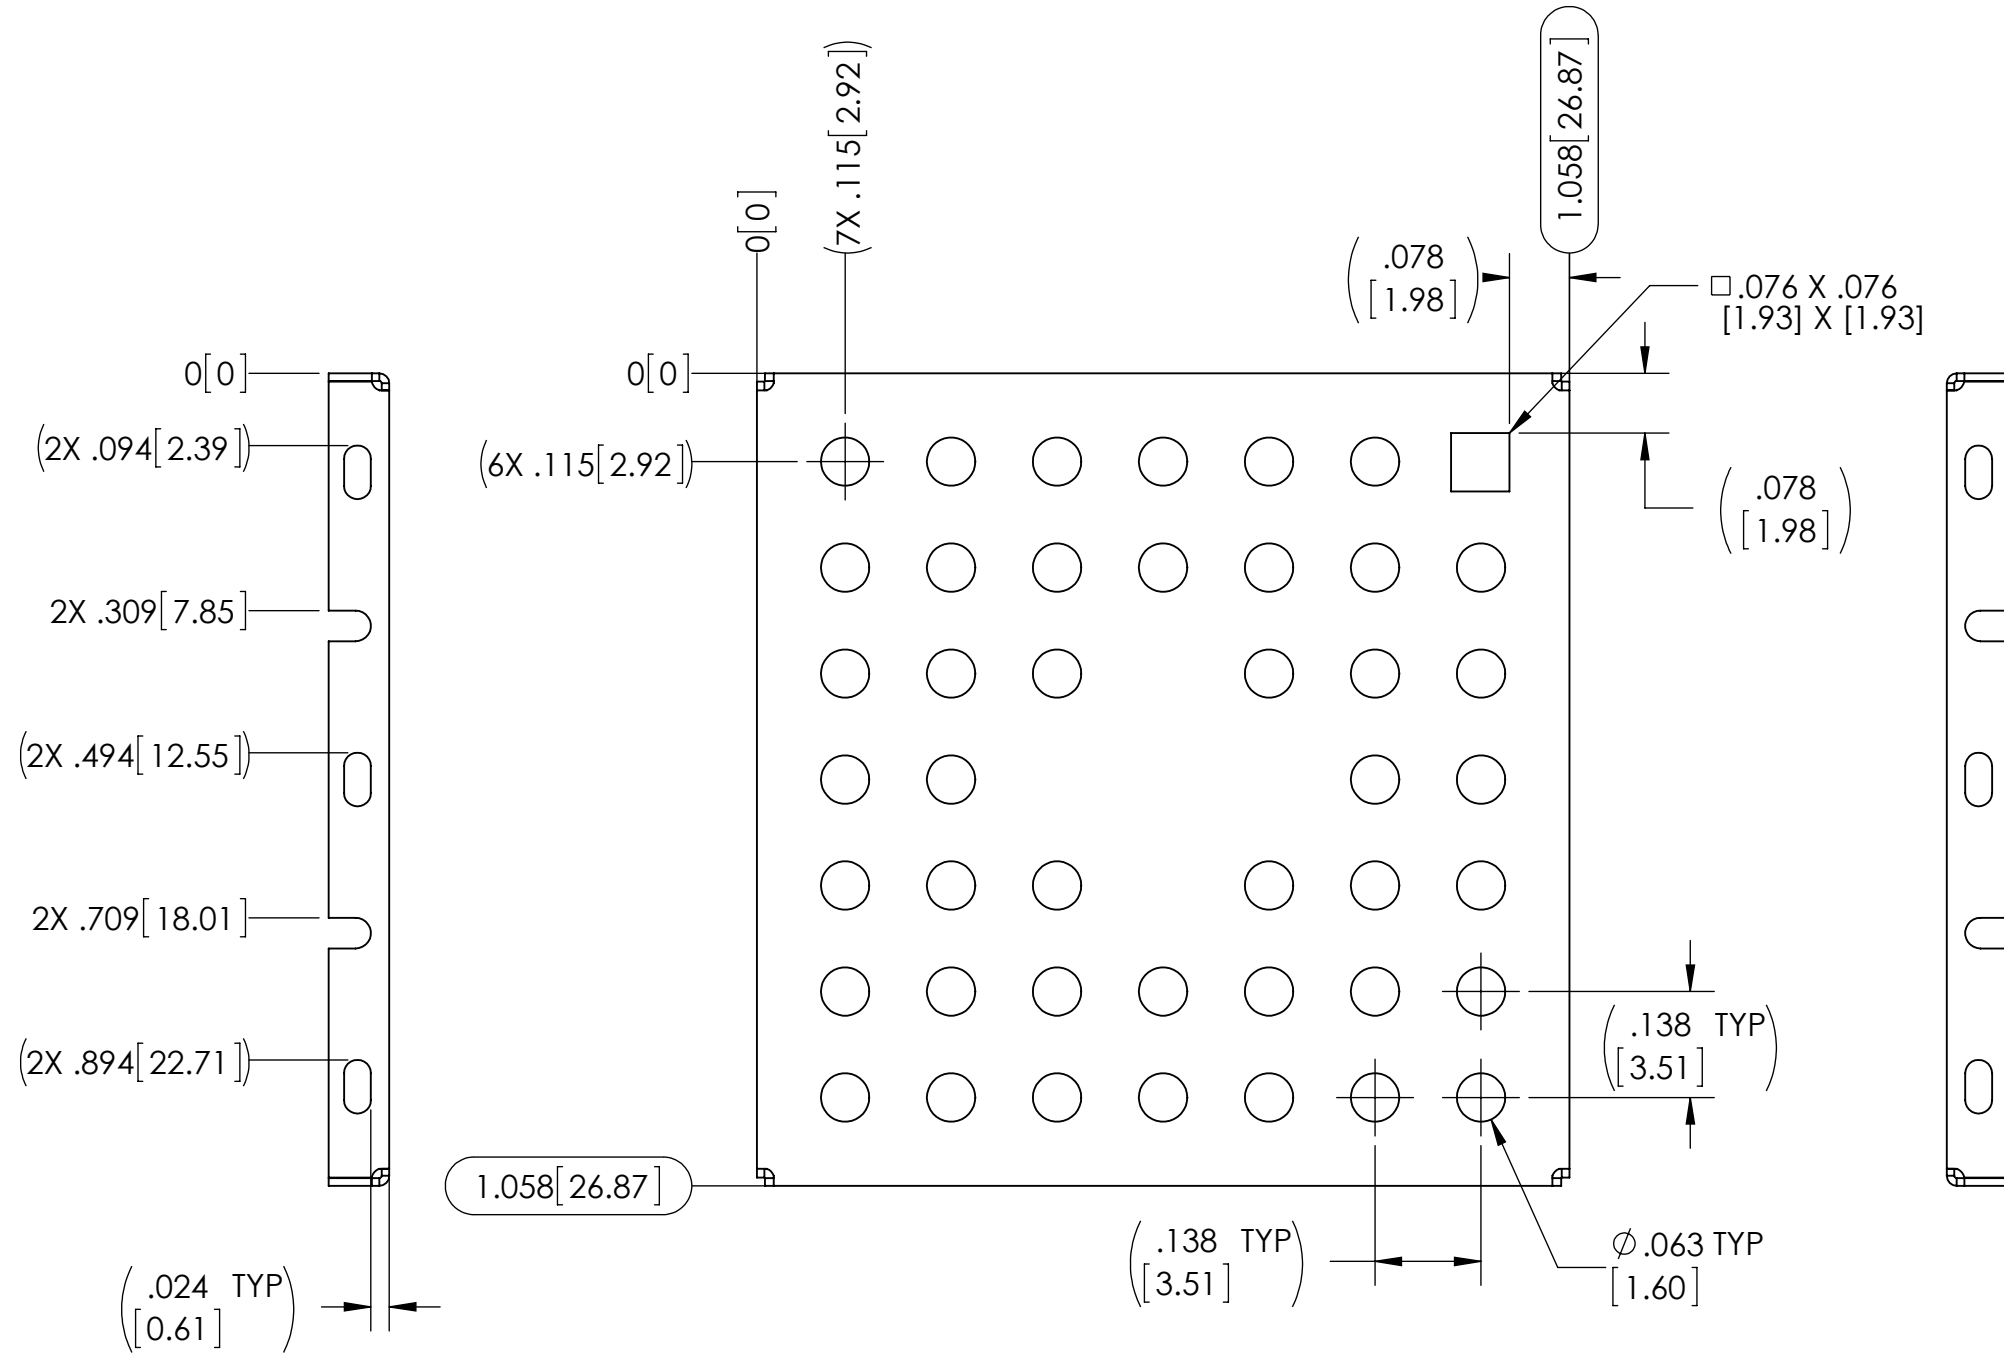


FORMED COVER

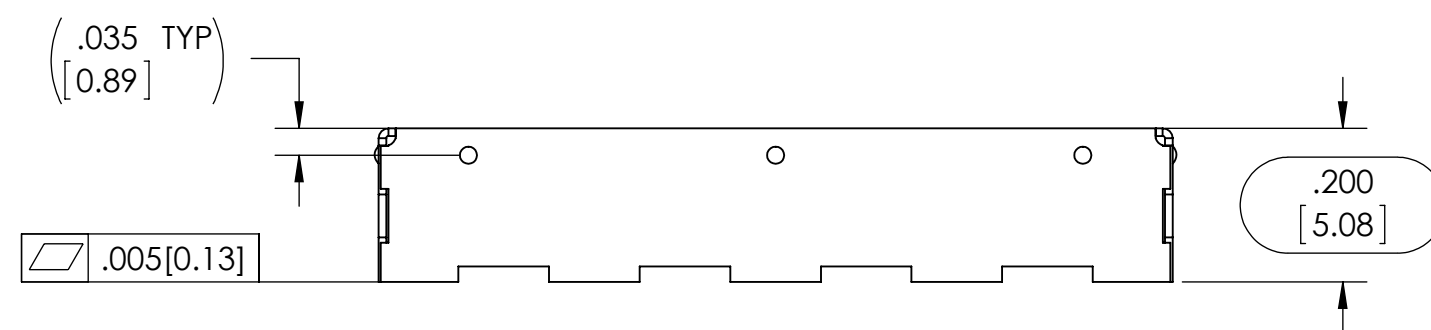

FORMED FRAME

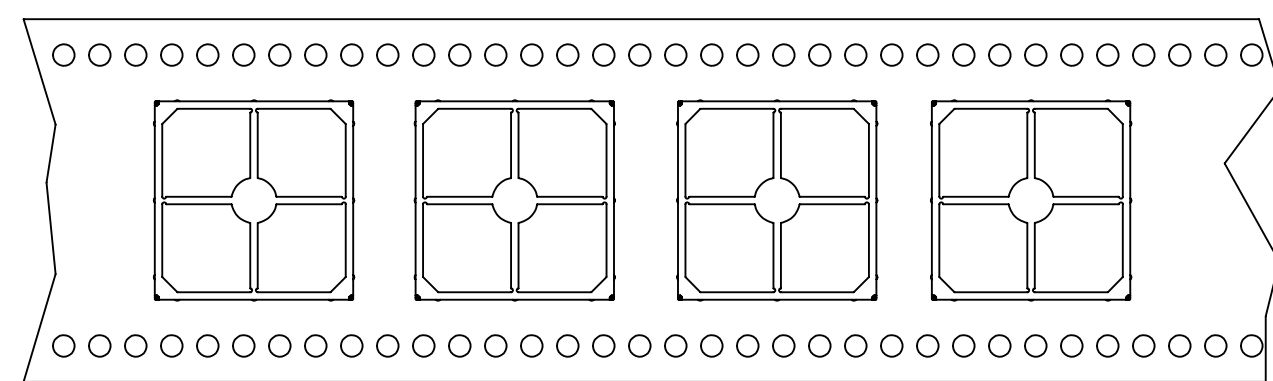

CARRIER TAPE

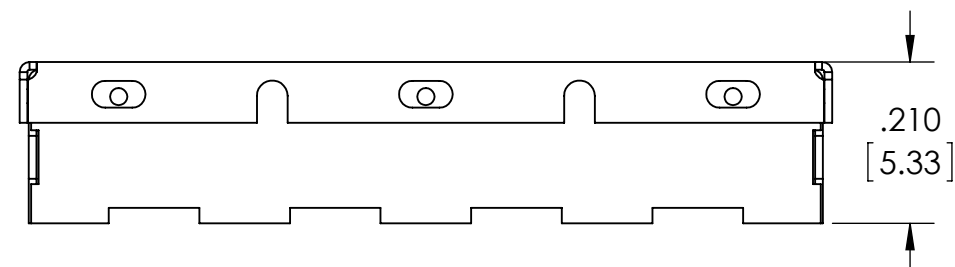

ASSEMBLY

CARRIER TAPE SPECIFICATIONS						
PART NUMBER	DESCRIPTION	OVERALL DIMENSION	OVERALL HEIGHT	CARRIER TAPE WIDTH	CARRIER TAPE PITCH	PARTS PER REEL
SMS-203-F	FRAME	1.034 X 1.034 [26.26 X 26.26]	.200 [5.08]	44mm	32mm	300
SMS-203-C	COVER	1.058 X 1.058 [26.87 X 26.87]	.079 [2.01]	N/A	N/A	BULK PACK

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OWNED BY LEADERTECH, OR DEVELOPED AT ITS OWN PRIVATE EXPENSE, AND MAY NOT BE USED, DUPLICATED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE INCLUDING DESIGN, MANUFACTURE OR PROCUREMENT WITHOUT THE WRITTEN PERMISSION OF LEADERTECH. LEADERTECH DOES NOT GUARANTEE OR WARRANTY THE PERFORMANCE CHARACTERISTICS.

UNLESS OTHERWISE SPECIFIED:

- ALL DIMENSIONS ARE IN INCHES
- PART SHALL BE FREE OF BURRS AND SHARP EDGES
- ALL DIMENSIONS SHOWN APPLY BEFORE PLATING AND COATINGS
- RoHS COMPLIANT PER EU DIRECTIVE 2002/95/EC
- POI = POINT OF INTERSECTION

THIRD ANGLE
PROJECTION

The symbol for third angle projection consists of a circle on the left and a truncated cone on the right, both centered on a horizontal line. The circle has a vertical center line. The truncated cone is shown in profile, with its circular base on the left and its tapered body extending to the right.

**LEADER
TECH**
a HEICO company

TITLE:

SURFACE MOUNT SHIELD

XXX +/- .005[0.13]	.XX +/- .010[0.25]	.X +/- .020[0.51]	ANGLES +/- .2°
DRAWN BY: DJM	DRAWN DATE: 01/06/2010	APPROVED BY: -	APPROVAL DATE: -

FINISH:	BRIGHT
MATERIAL:	.010"[0.25] - PRE TIN STEEL

SIZE:	DWG. NO.:	REV:
D	SMS-203	E

SCALE: 4:1	CAGE CODE: 4J674	SHEET: 1 OF 1
---------------	---------------------	------------------