




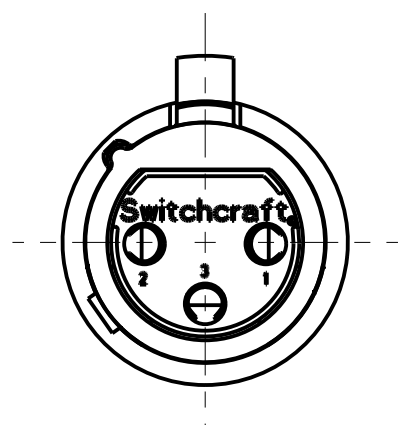


3 PIN

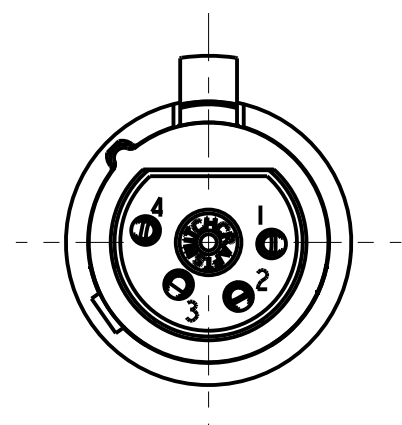


4 PIN

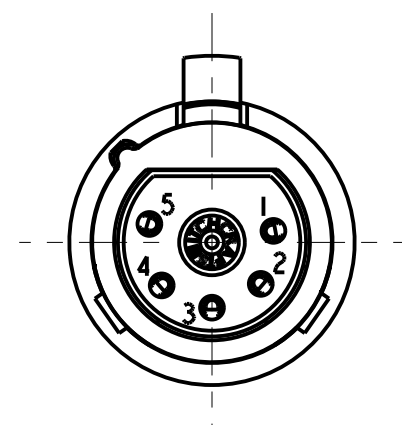

5 PIN

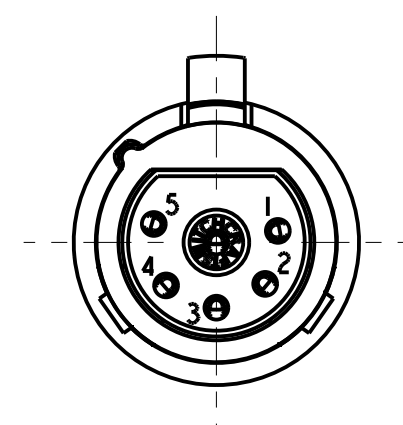

6 PIN

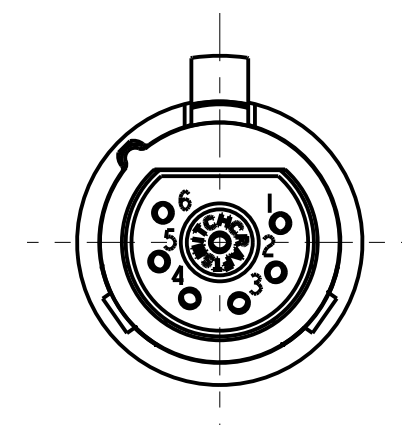

7 PIN

STANDARD SERIES

INSERT SCREW - STAINLESS STEEL
SHELL - STAINLESS STEEL
HOUSING - ZINC, NICKEL PLATED
LATCH BUTTON - ZINC, NICKEL PLATED
TUBULAR INSULATOR - MYLAR
INSULATOR - POLYESTER, GREEN OR BLACK
CABLE CLAMP - BRASS, ELECTRO TIN PLATED
FLEX RELIEF - HI-FAX, BLACK
LATCH SPRING - STAINLESS STEEL
CONTACTS - PHOSPHOR BRONZE, SILVER PLATED






AA F
CONTACT PLATING
BLANK = SILVER (STANDARD)
AU = GOLD
HOUSING FINISH SEE NOTE 2
BLANK = NICKEL PLATE (STANDARD)
BX = BLACK CHROME
LATCH TYPE
BLANK = STANDARD LATCHLOCK
D = FAS-DIS-CONNECT DETENT (SEE FIGURE 1)
FLEX RELIEF SIZE
BLANK = STANDARD SIZE (0.210 TO 0.300)
L = LARGE CABLES (0.300 TO 0.328)
S = SMALL CABLES (0.105 TO 0.205)
NO. OF CONTACTS:
3 = 3 CONTACTS
4 = 4 CONTACTS
5 = 5 CONTACTS
6 = 6 CONTACTS
7 = 7 CONTACTS

PROFESSIONAL SERIES

SAME AS ABOVE EXCEPT
CONTACTS - PHOSPHOR BRONZE, GOLD OVER NICKEL
HOUSING - NON-REFLECTIVE VEL-TONE FINISH
FLEX RELIEF - GRAY

AQGP 22
NO. OF CONTACTS:
3 = 3 CONTACTS

- NOTES:
- 1. ALL DIMENSIONS REFERENCE UNLESS OTHERWISE SPECIFIED.
 - 2. BLACK HOUSING AND INSERT WITH SATIN NICKEL PLATED LATCH.
 - 3. THIS PRODUCT IS RoHS COMPLIANT.

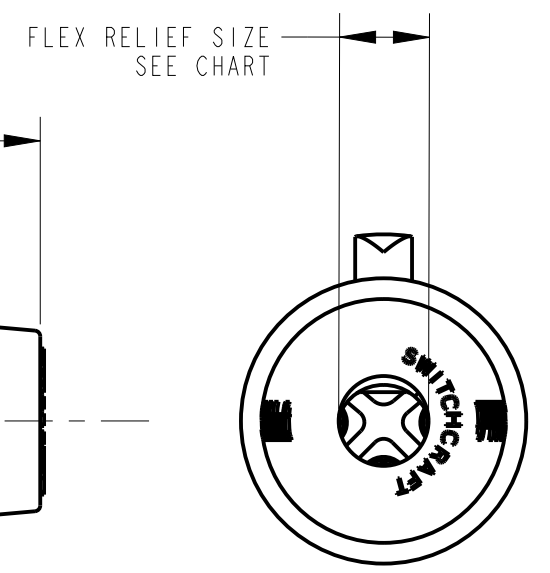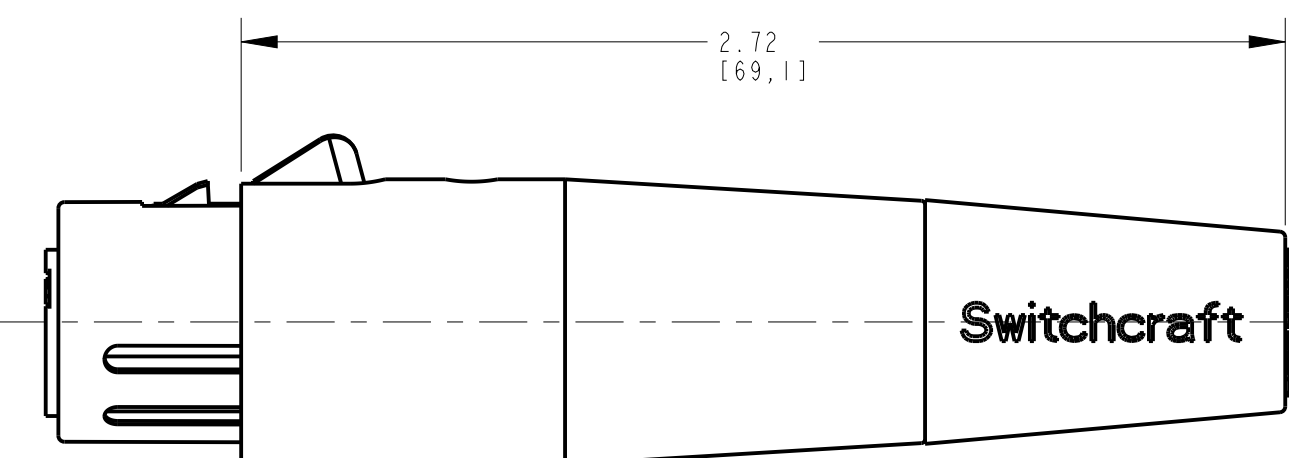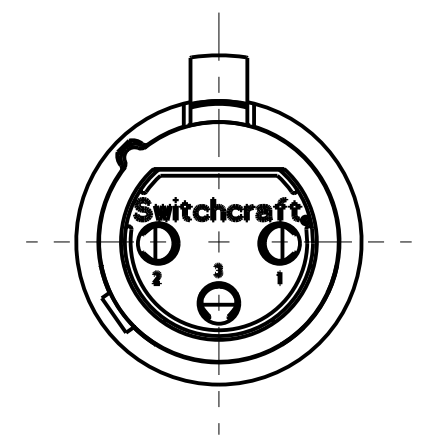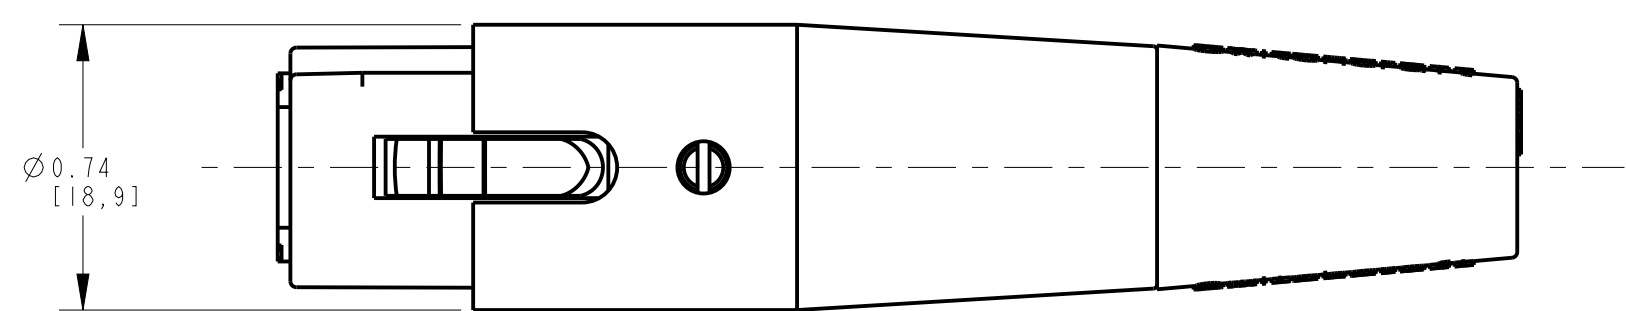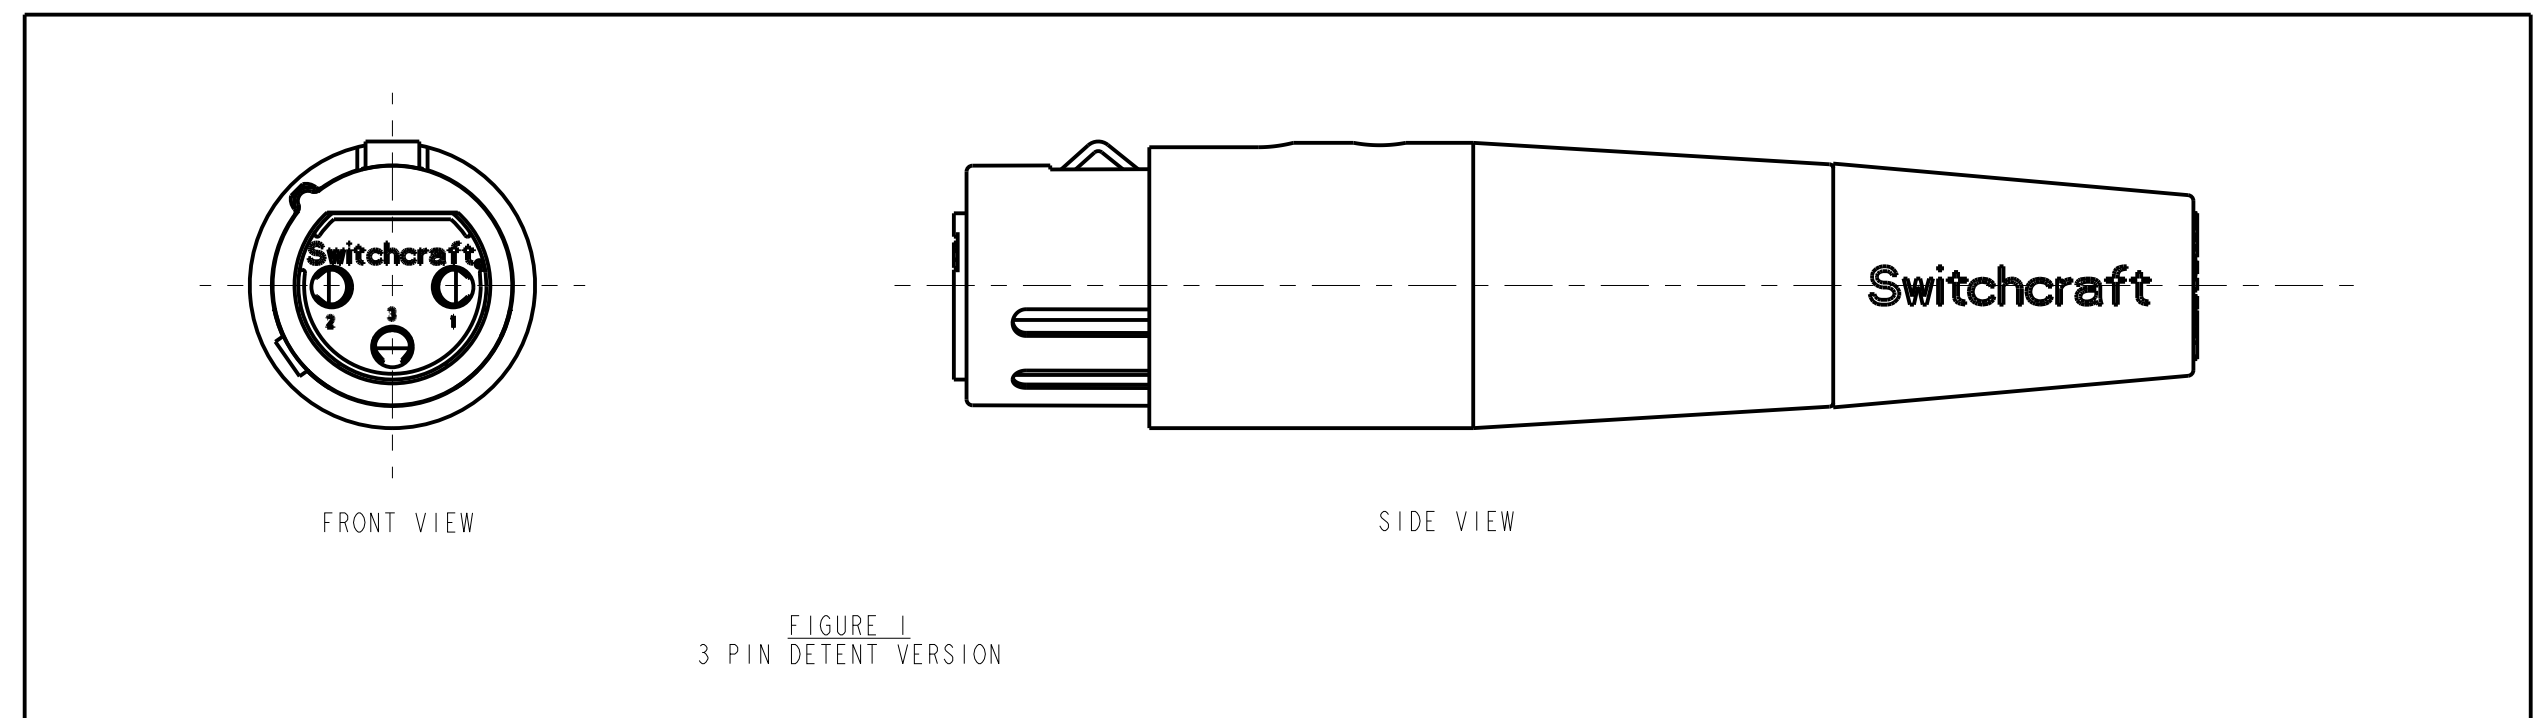

T	28764	08-27-25	PC	TJK	★ STAR SYMBOL DENOTES CRITICAL DIMENSION	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
S	28131	01-08-19	PC	TJK	UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.01 - THREE PLACE DECIMALS ±0.005 - FRACTIONAL DIMENSIONS ±1/64 - ANGLES - ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R. 2. FEATURES ON THE SAME CENTER LINE MUST BE ALIGNED WITHIN ±0.002 3. REMOVE ALL BURRS DO NOT SCALE DRAWING	SIZE	WIDTH	MULT	LBS/M	TEMPER
R	28046	07-05-18	PC	TJK		FINISH		MATERIAL		
P	26965	5-25-12	TO	TJK		SPEC No.		SPEC No.		
N	26158	10-4-06	TO	TJK		FIRST USED ON		SCALE 2:1		Switchcraft®
M	21522	1-31-97	MM	RB		DATE DRAWN	BY	CHKD	APVD	
L	20762	12-4-96	MM	RB		8-Jul-94	SG	1-19-95	GHJ	1-19-95
REV	ECO NUMBER	DATE	BY	APVD		NAME		PART No.		REV
REVISIONS						AA SERIES FEMALE QG, RoHS		AA_F SERIES		T