

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

PHYSICAL PROPERTIES:
HOUSING MATERIAL: PBT
FLAMMABILITY: UL94V-0
COLOR: BLACK
MAX BOW/WARP: .0056 IN/IN.

TERMINAL:
TERMINALS: BRASS, TIN PLATED. (UNLESS OTHERWISE STATED)
SCREWS: 8-32 STEEL, NICKEL PLATED. (UNLESS OTHERWISE STATED)
Q.C. TABS: BRASS, NICKEL PLATED.

MECHANICAL:
PITCH (TERMINAL SPACING): .563"
WIRE RANGE: 10-22 AWG
RECOMMENDED TIGHTENING TORQUE: 14IN-LBS MAX.

ELECTRICAL PROPERTIES:
MAXIMUM CURRENT: 30A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP RANGE: -40°C TO 120°C

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	T6	REVISED PER ECR-22-159254	02JAN2023	RB	SM

1	2	3	4
---	---	---	---

1

2

3

4

5

6

7

8

STAINLESS STEEL SCREWS.

WHITE INK STAMP.

NICKEL PLATED BRASS TERMINALS.

NICKEL PLATED BRASS SCREWS.

SEE FIGURE.

PRELIMINARY PART NUMBER.

OBSOLETE PART NUMBER.

TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

6	5	-	-	-	-	-	-	-	-	-	7.886	8.323	13	1-1546310-3
2	7	-	-	-	-	-	-	12	12	12	7.323	7.760	12	4-1546310-8
7	-	8	-	-	-	12	12	12	-	-	7.323	7.760	12	4-1546310-7
7	-	-	-	-	12	12	12	-	-	-	7.323	7.760	12	4-1546310-6
-	-	-	-	-	-	-	-	-	-	-	7.323	7.760	12	1-1546310-2
-	-	-	-	-	-	-	-	-	-	-	6.760	7.179	11	1-1546310-1
-	-	-	-	-	-	-	-	-	-	-	6.197	6.634	10	1-1546310-0
-	-	-	-	-	-	-	-	-	-	-	5.634	6.071	9	1546310-9
4	7	-	-	-	-	-	-	-	-	8	5.071	5.508	8	4-1546310-5
-	8	8	-	-	-	-	-	-	-	-	5.071	5.508	8	2-1546310-9
-	-	-	-	-	-	-	-	-	-	-	5.071	5.508	8	1546310-8
7	-	-	-	-	-	7	-	-	-	-	4.508	4.945	7	3-1546310-8
-	-	-	-	-	-	-	-	-	-	-	4.508	4.945	7	1546310-7
4	7	-	-	-	-	-	-	-	-	6	3.945	4.382	6	4-1546310-4
4	7	-	-	-	-	-	-	-	-	-	3.945	4.382	6	4-1546310-3
7	-	-	-	-	-	-	-	-	-	6	3.945	4.382	6	4-1546310-2
5	3	2	1	7	-	-	-	-	-	-	3.945	4.382	6	3-1546310-1
-	-	-	-	-	-	6	-	-	-	-	3.945	4.382	6	3-1546310-0
-	6	6	-	-	-	-	-	-	-	-	3.945	4.382	6	2-1546310-8
5	4	3	7	-	-	5	1	-	-	-	3.945	4.382	6	2-1546310-6
1	7	-	-	-	-	-	-	6	-	-	3.945	4.382	6	2-1546310-3
1	7	-	-	-	6	-	-	-	-	-	3.945	4.382	6	2-1546310-2
7	-	-	-	-	-	-	-	-	6	6	3.945	4.382	6	2-1546310-1
5	2	7	-	-	-	-	-	6	6	-	3.945	4.382	6	1546636-1
6	1	-	-	6	-	-	-	6	-	-	3.945	4.382	6	1-1546310-9
1	-	-	-	6	-	-	-	-	-	-	3.945	4.382	6	1546589-1
-	-	-	-	-	-	-	-	-	-	-	3.945	4.382	6	1546310-6
-	-	-	-	-	5	-	-	-	-	-	3.382	3.819	5	3-1546310-7
5	4	3	7	-	-	-	1	-	5	-	3.382	3.819	5	2-1546310-7
-	-	-	-	-	-	-	-	-	-	-	3.382	3.819	5	1546310-5
2	6	-	-	-	-	-	-	4	4	4	2.819	3.256	4	5-1546310-0
5	4	3	2	7	-	-	-	-	-	-	2.819	3.256	4	4-1546310-1
7	4	-	-	-	-	-	-	-	-	-	2.819	3.256	4	4-1546310-0
5	3	2	1	7	-	-	-	-	-	-	2.819	3.256	4	3-1546310-9
-	-	-	-	-	-	-	-	-	-	-	2.819	3.256	4	1546310-4
4	3	7	-	-	-	-	-	-	-	-	2.256	2.693	3	2-1546310-5
5	1	7	-	-	-	-	-	3	1	-	2.256	2.693	3	2-1546310-4
6	5	1	-	1	2	-	-	1	-	-	2.256	2.693	3	2-1546310-0
-	-	-	-	-	-	-	-	-	-	-	2.256	2.693	3	1546310-3
-	-	-	-	-	-	-	2	-	2	-	1.693	2.130	2	5-1546310-1
-	-	-	-	-	-	-	-	-	-	-	1.693	2.130	2	1546310-2
NOTES	9	8	7	6	5	4	3	2	1	DIM B	DIM A	NO. OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
-

FINISH
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

DWN
S SCHLEGEL
CHK
S YODER
APVD
S YODER
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
CUSTOMER DRAWING

16FEB2007
2/16/07
2/16/07
-

16FEB2007
2/16/07
-

16FEB2007
2/16/07
-

TE Connectivity Ltd.

14.3 (.563) DBL ROW BARRIER STRIP
W/O WASHER
-

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-1546310

RESTRICTED TO
-

SCALE
NTS



SHEET
1 of 4

REV
T6

1471-9 (1/15)

1546310

1546310

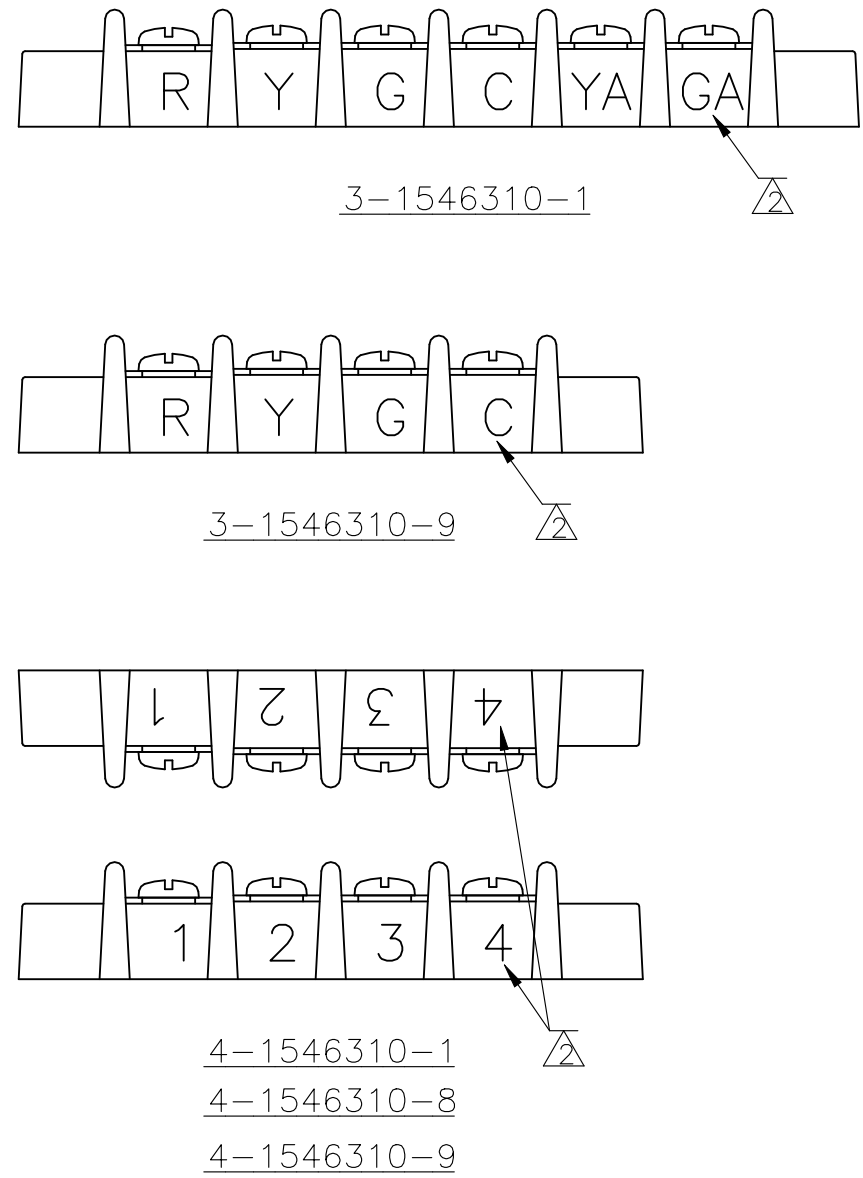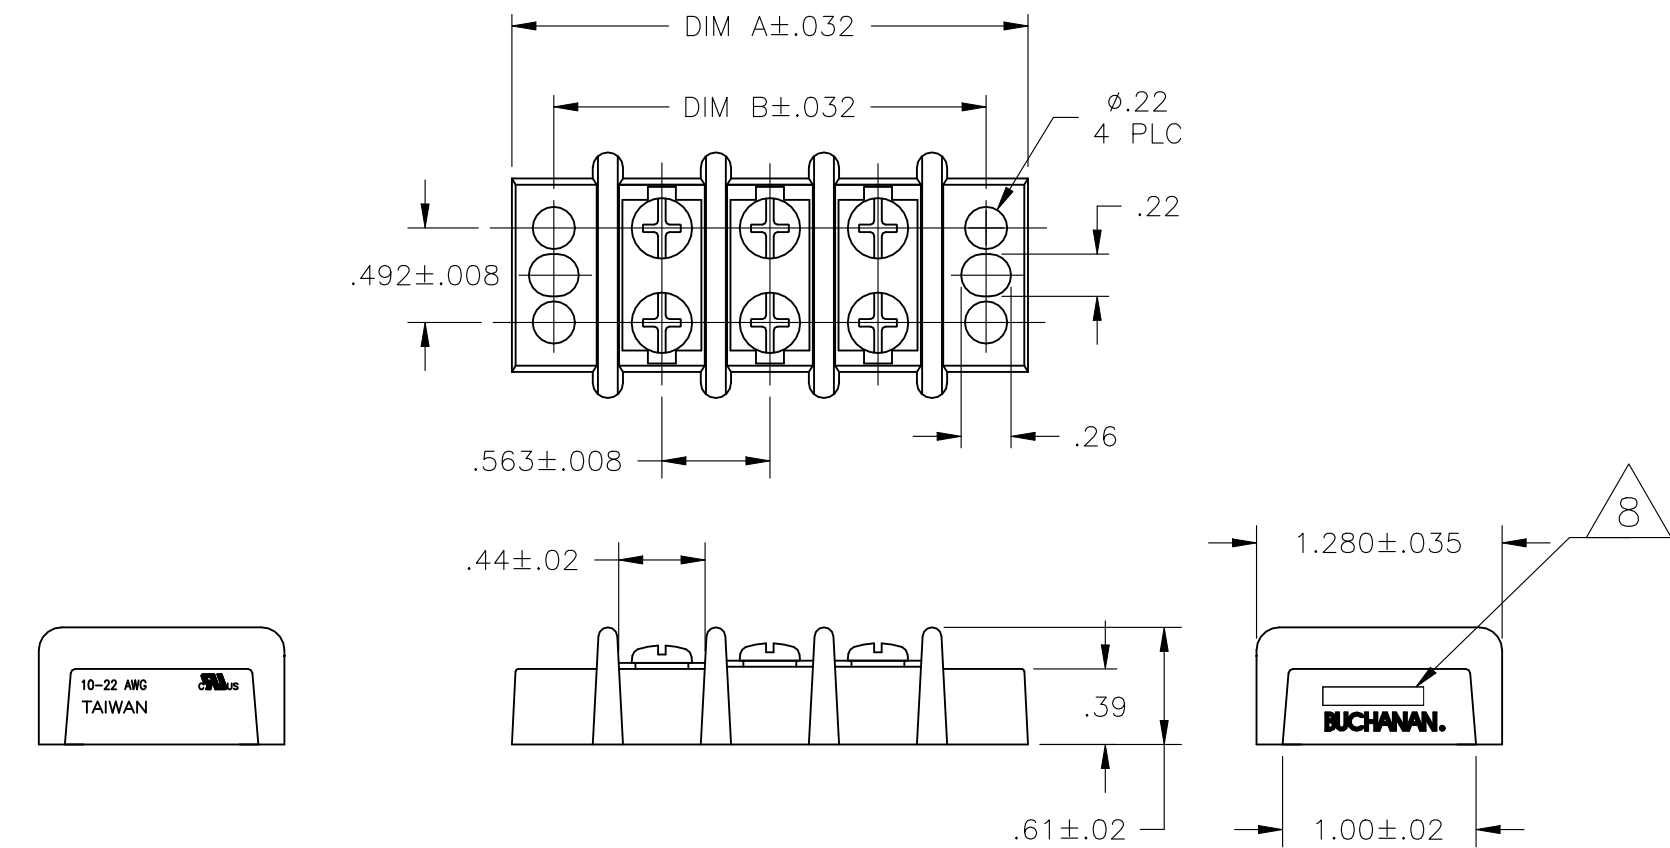

	—	—	—	2	—	—	2	—	2	—	1.693	2.130		5–1546310–1
	—	—	—	—	—	—	—	—	—	—	10.701	11.138	18	1–1546310–8
	—	—	—	—	—	—	—	—	—	—	10.138	10.575	17	1–1546310–7
	—	—	—	—	—	—	—	—	—	—	9.575	10.012	16	1–1546310–6
	—	—	—	—	—	—	—	—	—	—	9.012	9.449	15	1–1546310–5
	—	—	—	—	—	—	—	14	14	14	8.449	8.886	14	4–1546310–9
	—	—	—	—	—	—	—	—	—	—	8.449	8.886	14	1–1546310–4
NOTES	(9) OTB JUMPER	(8) .250 QC TAB 90° DOUBLE SIDE	(7) .250 QC TAB 90°/45° DOUBLE SIDE	(6) .250 QC TAB 90° DOUBLE SIDE	(5) .250 QC TAB 45° DOUBLE SIDE	(4) .250 QC TAB STRAIGHT DOUBLE SIDE	(3) .250 QC TAB 90° SINGLE SIDE	(2) .250 QC TAB 45° SINGLE SIDE	(1) .250 QC TAB STRAIGHT SINGLE SIDE	DIM B	DIM A	NO. OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

MATERIAL

TOLERANCES, UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH

DWN 16FEB2007
CHK 2/16/07
APVD 2/16/07
PRODUCT SPEC
APPLICATION SPEC
WEIGHT -

TE Connectivity Ltd.

14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER


SIZE A2 CAGE CODE 00779 DRAWING NO C=1546310 RESTRICTED TO -

CUSTOMER DRAWING


SCALE NTS SHEET 2 OF 4 REV T6

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

D

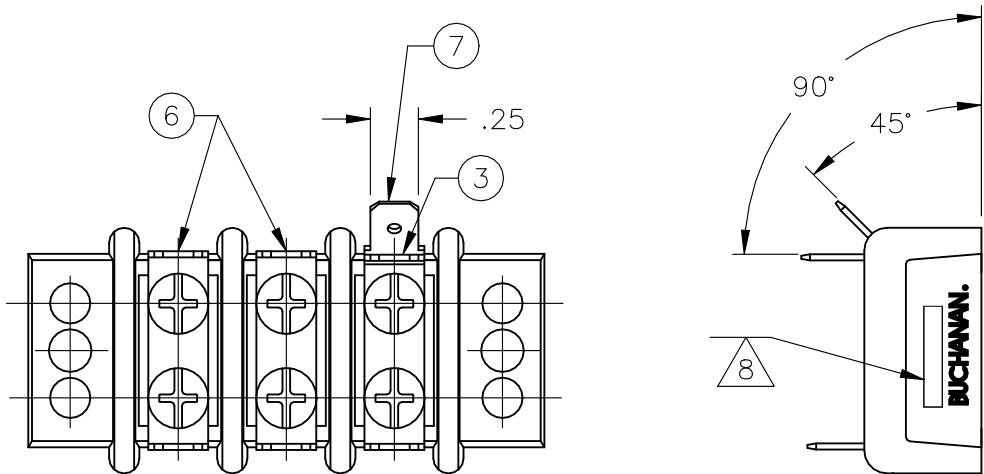


2-1546310-0

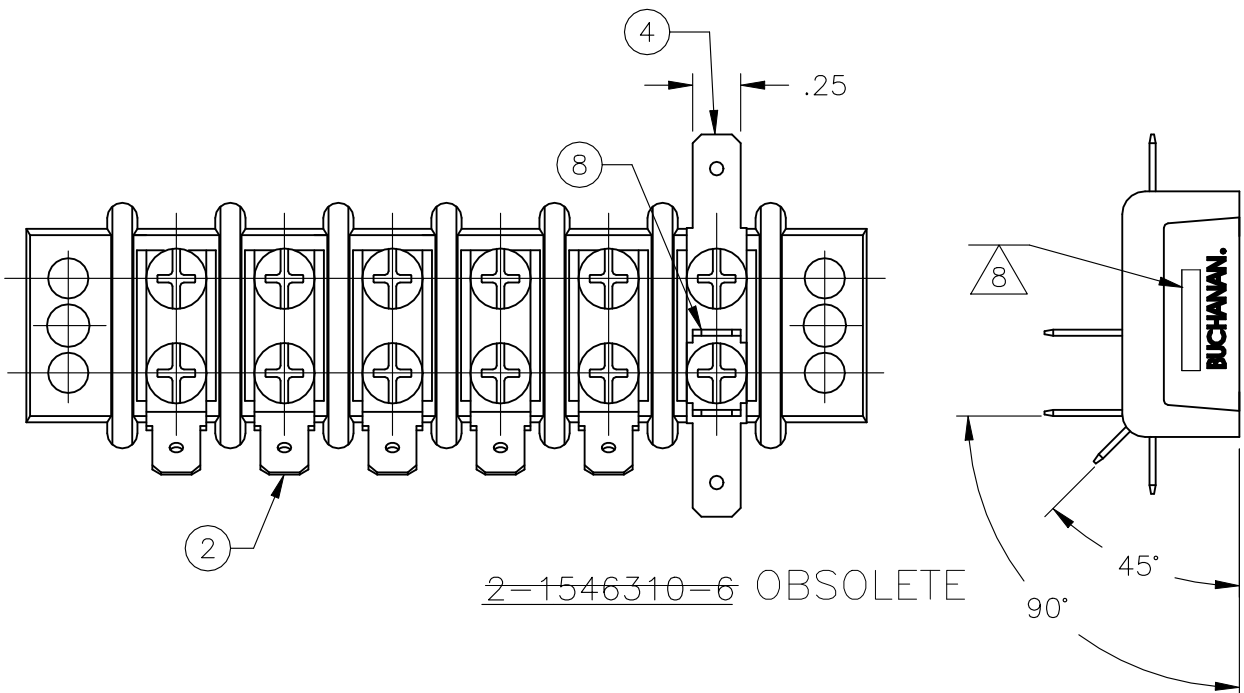


2-1546310-6 OBSOLETE


C

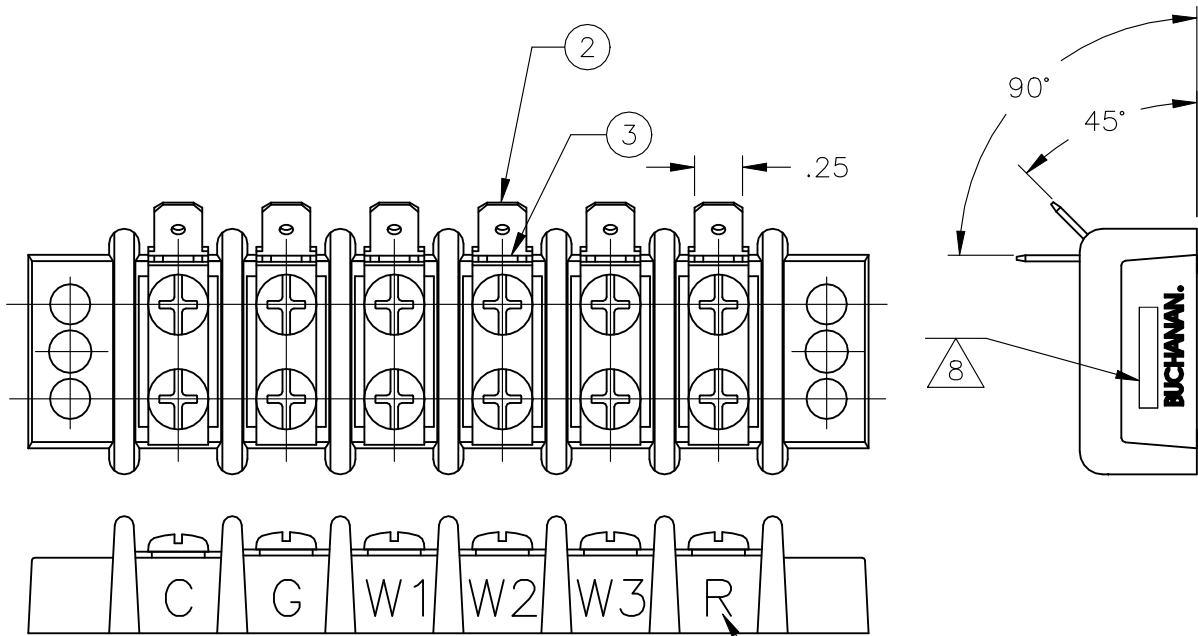

OBSOLETE 1546636-1

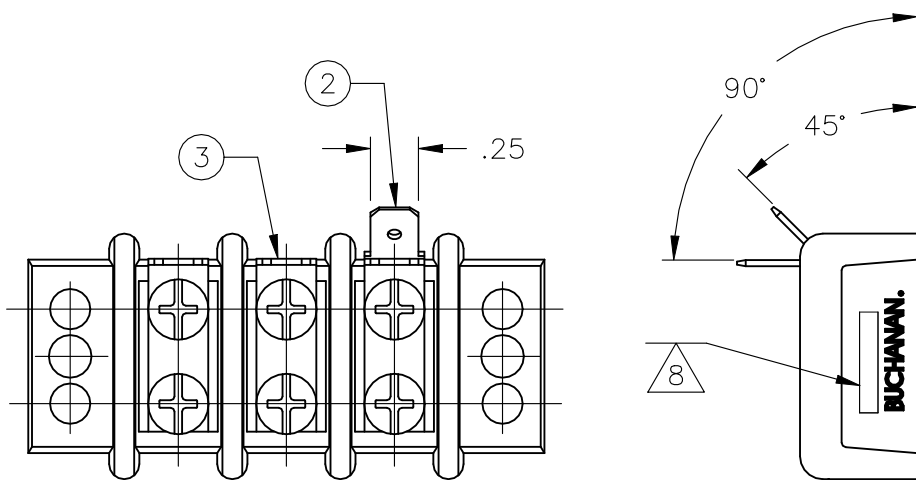


2-1546310-4 OBSOLETE

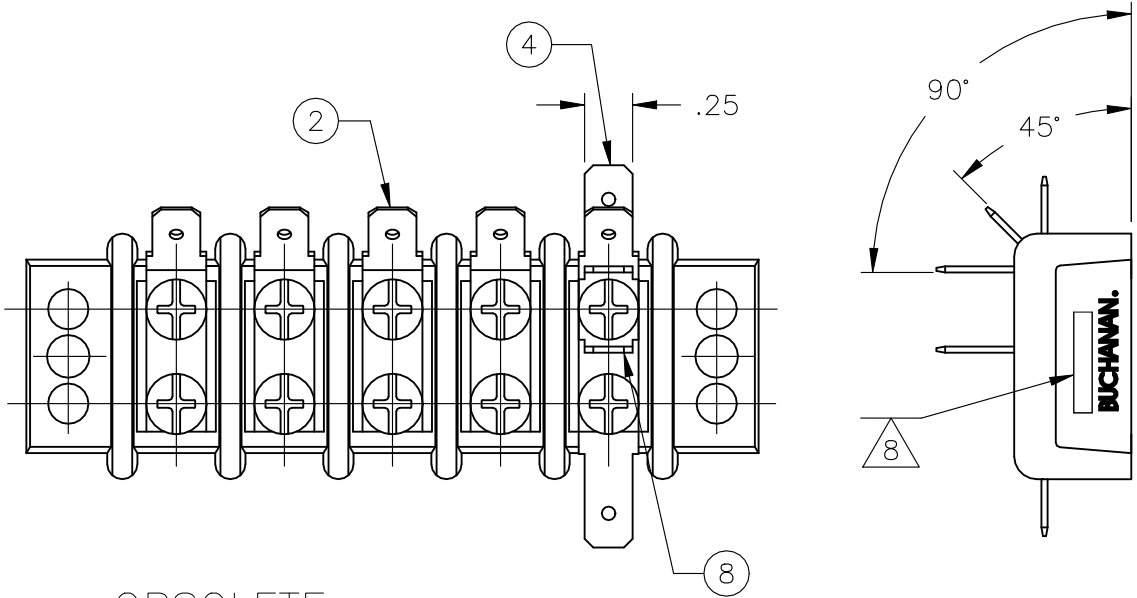

OBSOLETE 2-1546310-7

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 16FEB2007	 TE Connectivity Ltd.		
DIMENSIONS: INCHES		CHK S YODER 2/16/07			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S YODER 2/16/07	NAME 14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER		
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC - APPLICATION SPEC -			
MATERIAL -	FINISH -	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C-1546310
CUSTOMER DRAWING			SCALE NTS	SHEET 3 OF 4	REV T6
			RESTRICTED TO -		

D



C


1546310

B

A

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

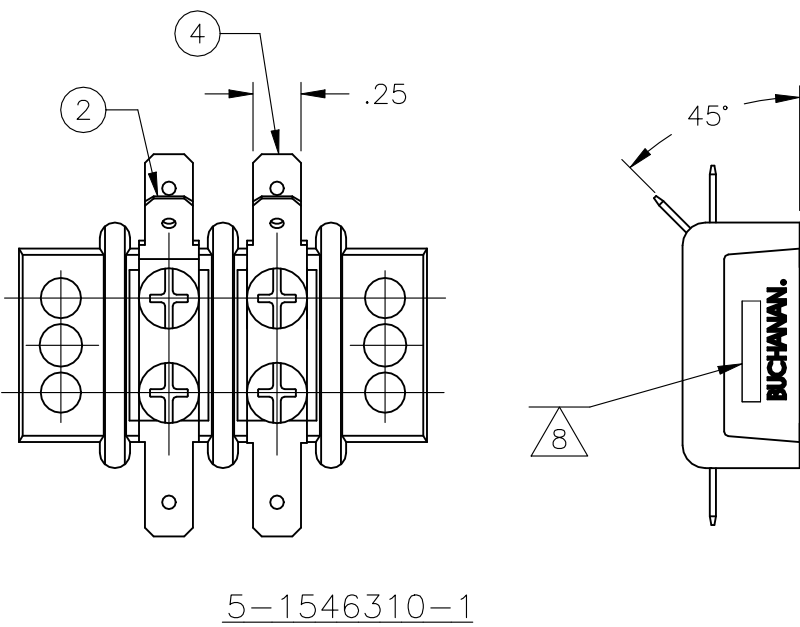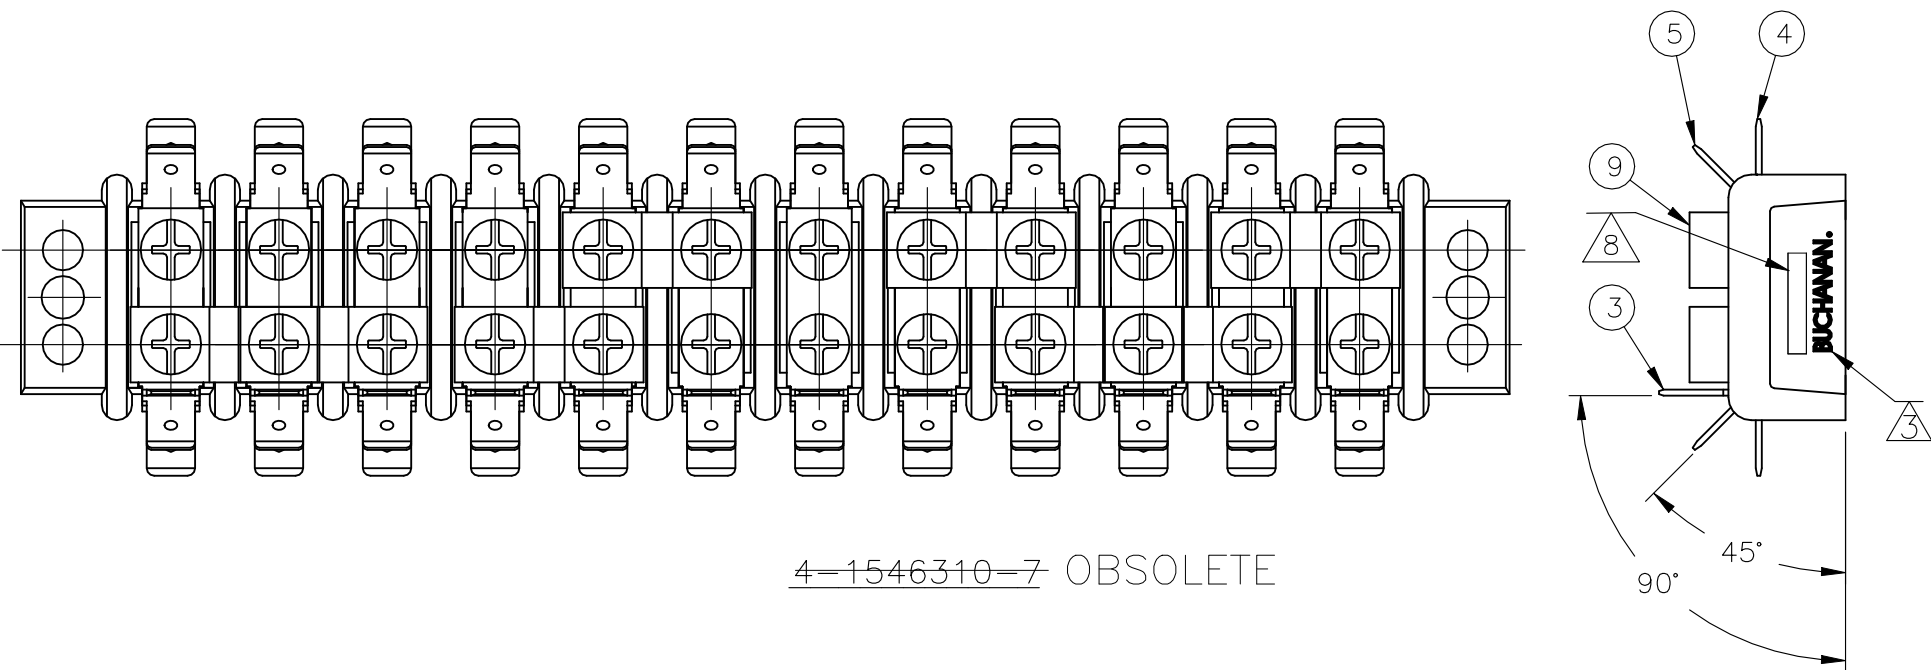

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 16FEB2007	 TE Connectivity Ltd.		
DIMENSIONS: INCHES		CHK S YODER 2/16/07			
	TOLERANCES, UNLESS OTHERWISE SPECIFIED:	APVD S YODER 2/16/07	NAME 14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER		
		PRODUCT SPEC			
		APPLICATION SPEC	SIZE A2	CAGE CODE 00779	DRAWING NO C-1546310
MATERIAL -	FINISH -	WEIGHT -	RESTRICTED TO -		
CUSTOMER DRAWING			SCALE NTS	SHEET 4 OF 4	REV T6