
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – TE Connectivity ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B6	REVISED PER ECO–17–007246	18MAY2017	RS	KR

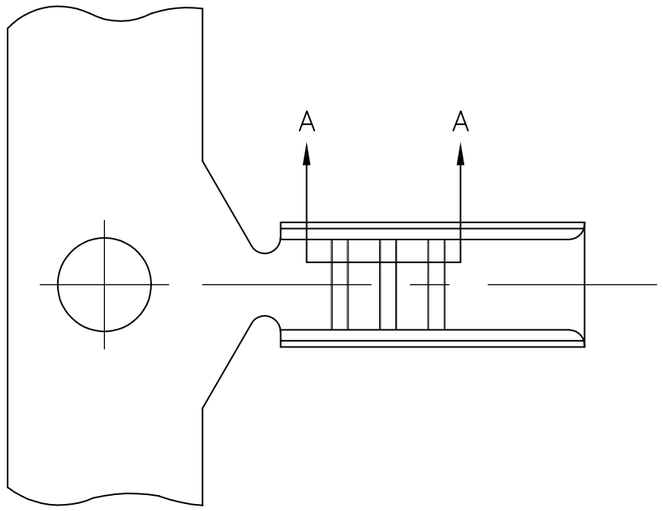


1 PRODUCT PROVIDED IN STRIP FORM ON REELS; BREAKS MAY BE PRESENT


△2 ALTERNATE REELING FOR THRU CRIMP APPLICATION.


△3 SUPPLIED ON PLASTIC REEL.

4 CRIMP WIDTH: .055 F
CRIMP HEIGHT: (±.002)=(TOTAL CMA + 2,200)/93,000

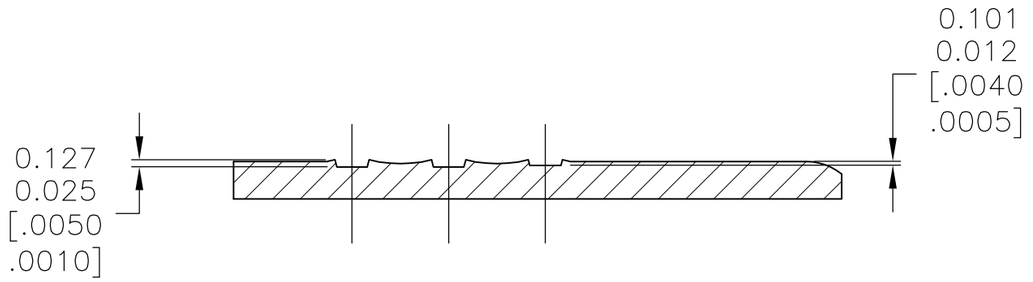

SECTION A–A
SCALE 20:1

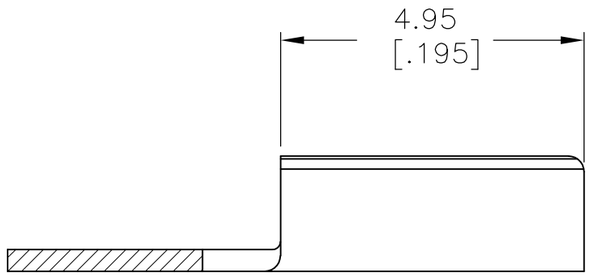

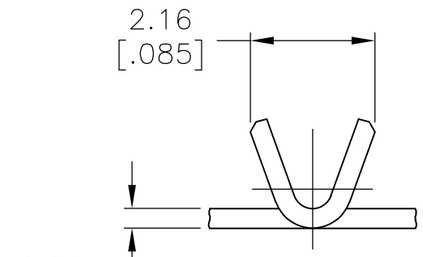

WIRE RANGE	PART NO
200–850 CMA	△3 63431–3
200–850 CMA	△2 63431–2
200–850 CMA	63431–1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± 0.25 [.010]
4 PLC ± –
ANGLES ± 1° 0'

MATERIAL: BRASS
FINISH: TIN

DWN RAGHAVENDRA 12OCT2006
CHK G.D.PORTA –
APVD G.D.PORTA –
PRODUCT SPEC –
APPLICATION SPEC 114–2016
WEIGHT 0.000000

TE Connectivity

NAME: AMPLIVAR SPLICE MINIATURE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–63431	–

CUSTOMER DRAWING | SCALE 10:1 | SHEET 1 OF 1 | REV B6