THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B3	REVISED PER ECO-13-006674	23APR2013	DLD	CJS
	B4	REVISED PER ECO-13-016055	15OCT2013	DLD	CJS
	B5	REVISED PER ECO-15-015996	05NOV2015	DLD	CJS

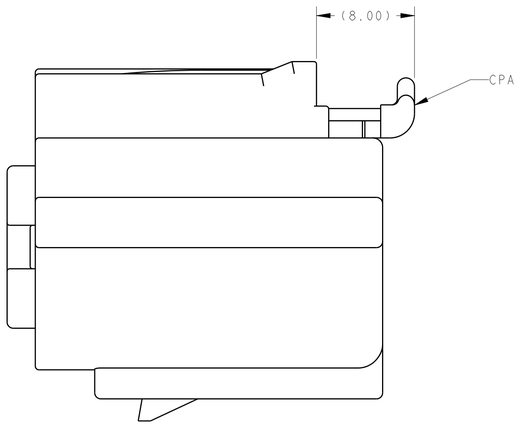

2-1924211-1
SCALE 4:1

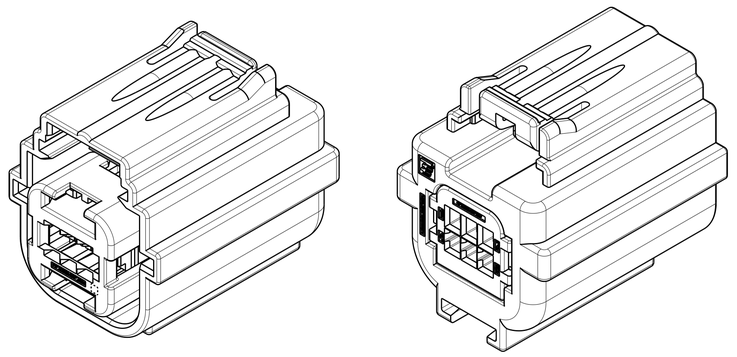

ISOMETRIC VIEWS
SCALE 3:1

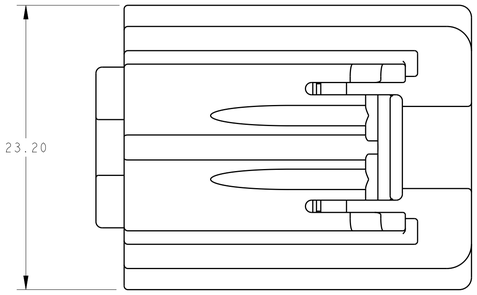

1. PLUG HOUSING: NYLON 6/6, GRAY.
   RING AND MATTE SEALS: SILICONE, LIGHT BLUE.
   TPA AND SEAL COVER: NYLON 6/6, RED.
   CPA: PBT GF-15, RED

2. TPA SHOWN IN PRE-LATCHED POSITION.

3. PLUG ASSEMBLY WILL ACCEPT TERMINAL PART NUMBERS:
   JST = SAIT-A03T-M064
   YAZAKI = 7116-7276-02
   TE = 2035170

4. PARTS HAVE BEEN VALIDATED TO GMW3191, DATED DECEMBER 2007,
   EXCEPT 4.12.1.5.2:
   TPA CLOSING FORCE WITH CORRECT ASSEMBLED TERMINAL TO BE < 35N.
   EXCEPT 4.12.5.5: CPA FORCES TBD

5. SEALING CLASS - 3.

6. VIBRATION CLASS - 1.

7. TEMPERATURE CLASS - 3.

8. MATES WITH PART NUMBER 1924212.

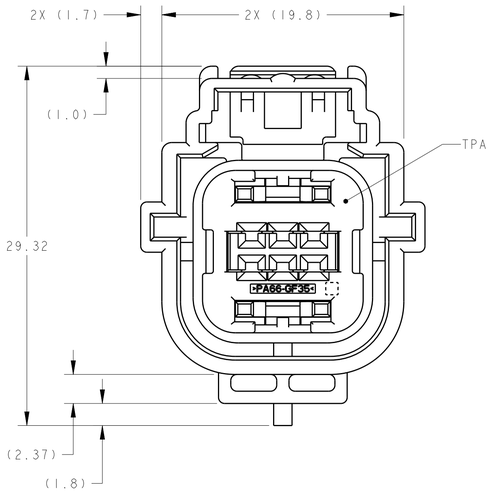

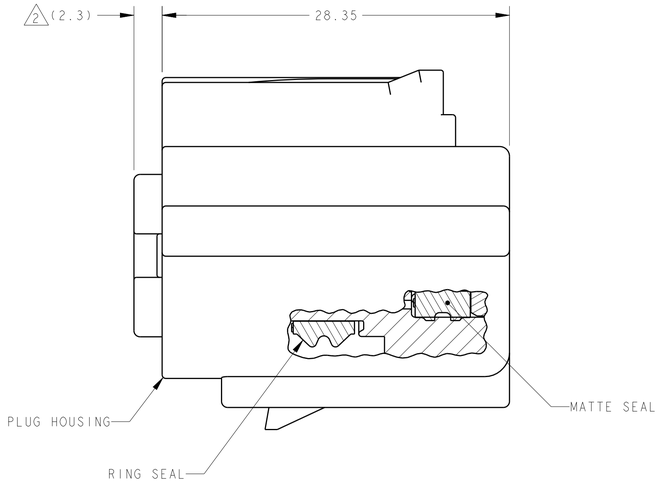

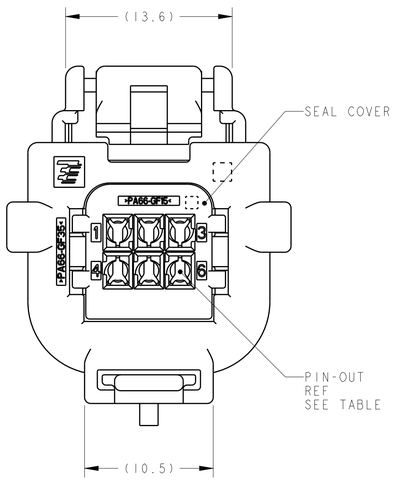

O	O	O	O	O	O	Y	B	2-1924211-1
O	O	X	O	O	O	N	B	1924211-6
O	O	O	O	X	O	N	B	1924211-3
X	X	X	X	X	X	N	B	1924211-2
O	O	O	O	O	O	N	B	1924211-1
CIR 1	CIR 2	CIR 3	CIR 4	CIR 5	CIR 6	CPA	CODING REF	PART NUMBER
PIN-OUT								

O = OPEN CIRCUIT; X = CLOSED CIRCUIT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL - 1
FINISH - -

DWN D. J. HARDY 26MAR2007
CHK E.C. BRANDBERG 25JUN2007
APVD E.C. BRANDBERG 25JUN2007
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME PLUG ASSEMBLY, 6 POSITION, 2x3, SEALED, 0.64mm

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1924211	-

Customer Drawing | SCALE 4:1 | SHEET 1 OF 1 | REV B5