

MOLEX P/N	LENGTH [M]	TOL [mm]	AWG
747521258	2.5	±50	30
747521308	3.0	±50	30
747521408	4.0	±50	30
747521508	5.0	±80	30
747521108	1.0	±50	30
747521158	1.5	±50	30
747521208	2.0	±50	30

NOTES:
1. MATERIALS
   - RAW CABLE - PVC
   - BACKSHELLS - NICKEL PLATED ZINC
   - DE-LATCH - PLASTIC
   - PULL - NYLON
   - PCB - HALOGEN FREE LAMINATE MATERIAL
2. IMPEDANCE - 100OHMS DIFFERENTIAL
3. RoHS COMPLIANT, NO EXEMPTIONS
4. EEPROM COMPLIANT TO SFF-8472 REV 11.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FP = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
mm	2:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± 2°
4 PLACES	±
3 PLACES	±
2 PLACES	± 0.130
1 PLACE	± 0.25
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: RETRACTED AS PER SALESFORCE 572458.

STATUS: Production
DRWN: ANIKETHAN SS 2023-07-19
CHK'D: Ganesh Rao B 2023-08-04
APPR: Gurunandan GA 2023-08-04

THIRD ANGLE PROJECTION | DRAWING: D-SIZE | SERIES: 74752

molex


SFP+ TO SFP+ 10G PASSIVE CABLE ASSEMBLY

PRODUCT SALES DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
747520008	PSD	000	I

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL MARKET	1 OF 3

CABLE BEND RADIUS

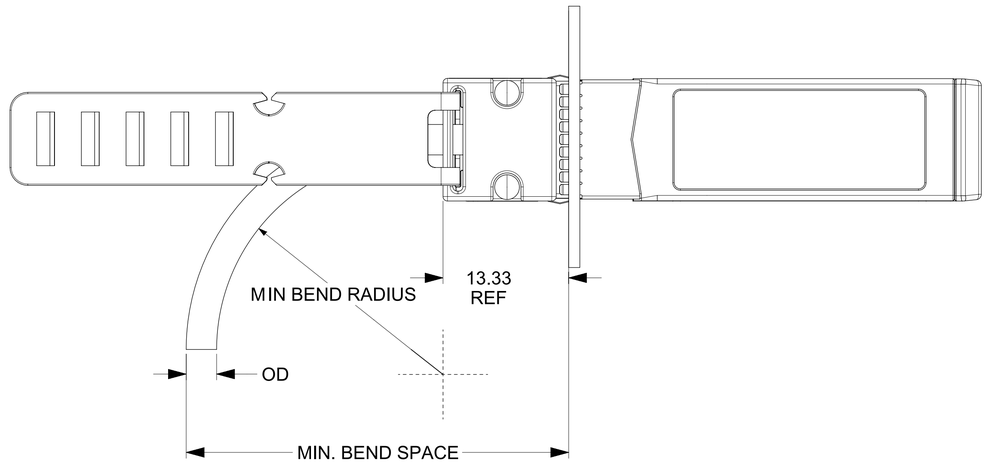

CABLE AWG	CABLE OD [mm]	MINIMUM BEND RADIUS [mm]	MINIMUM BEND SPACE [mm]
30	4.20	21	38
26	5.20	26	44

P1 END			P2 END	
PAD	SIGNAL		PAD	SIGNAL
12	RD-	←	19	TD-
13	RD+	←	18	TD+
18	TD+	→	13	RD+
19	TD-	→	12	RD-
02	Tx_Fault	NC NC	02	Tx_Fault
03	Tx_Disable	NC NC	03	Tx_Disable
04	SDA	■ ■	04	SDA
05	SCL	■ ■	05	SCL
06	Mod_ABS	NC NC	06	Mod_ABS
07	RS0	NC NC	07	RS0
08	Rx_LOS	NC NC	08	Rx_LOS
09	RS1	NC NC	09	RS1
15	VccR	NC NC	15	VccR
16	VccT	NC NC	16	VccT

LEGEND:

→ - THRU LINES

NC - NOT CONNECTED

■ - CONNECTION TO A DEVICE ON THE PCB

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FE = 0

DIVISIONAL SYMBOLS

DIMENSION UNITS: mm
SCALE: 3:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± 2'
4 PLACES	±
3 PLACES	±
2 PLACES	± 0.130
1 PLACE	± 0.25
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: RETRACTED AS PER SALESFORCE 572458.

STATUS: Production
DRWN: ANIKETHAN SS 2023-07-19
CHK'D: Ganesh Rao B 2023-08-04
APPR: Gurunandan GA 2023-08-04

molex

SFP+ TO SFP+ 10G PASSIVE CABLE ASSEMBLY


PRODUCT SALES DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
747520008	PSD	000	I

THIRD ANGLE PROJECTION | DRAWING: D-SIZE | SERIES: 74752 | MATERIAL NUMBER: SEE TABLE | CUSTOMER: GENERAL MARKET | SHEET NUMBER: 2 OF 3

FORMAT TEMPLATE
REVISION: B
DATE: 2023-06-01

CABLE LABEL DETAILS

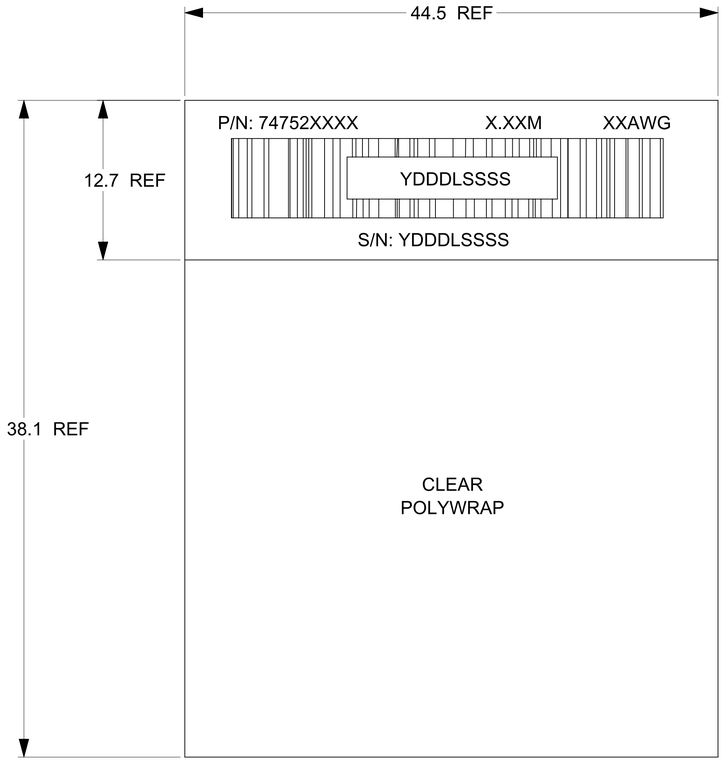

P/N: SEE TABLE
S/N: Y = YEAR, LAST DIGIT OF YEAR
DDD = DAY OF THE YEAR
L = LOCATION - 1 = USA
2 = MEXICO
3 = CHINA
4 = PHILIPPINES
SSSS = SERIAL NUMBER

X.XXM: CABLE LENGTH, SEE TABLE

XXAWG: WIRE GAGE, SEE TABLE

(DATE CODE ISO-8601 FORMAT)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FP = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
mm	2:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± 2'
4 PLACES	±
3 PLACES	±
2 PLACES	± 0.130
1 PLACE	± 0.25
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: RETRACTED AS PER SALESFORCE 572458.

STATUS: Production

DRWN:	ANIKETHAN SS	2023-07-19
CHK'D:	Ganesh Rao B	2023-08-04
APPR:	Gurunandan GA	2023-08-04

molex

SFP+ TO SFP+ 10G PASSIVE CABLE ASSEMBLY

PRODUCT SALES DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
747520008	PSD	000	I

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	D-SIZE	74752	SEE TABLE	GENERAL MARKET	3 OF 3