


CONNECTOR P/N	∅D (µm)	∅d (µm)	CONNECTOR TYPE	HOUSING COLOR	BOOT COLOR	CABLE TYPE / SIZE
1063971927	125.5 +0.5/-0	0.5	Single Mode	Blue	Blue	Simplex 1.6mm
1063971302						Simplex 2.0mm
1063971929	126.0 +1.0/-0	1.0				Simplex 1.6mm
1063971304						Simplex 2.0mm
1063972127	127.0 +3.0/-0	3.0	Multimode	Gold	White	Simplex 1.6mm
1063971502						Simplex 2.0mm
1063971930	125.5 +0.5/-0	0.5	Single Mode/APC	Blue	Green	Simplex 1.6mm
1063971310						Simplex 2.0mm

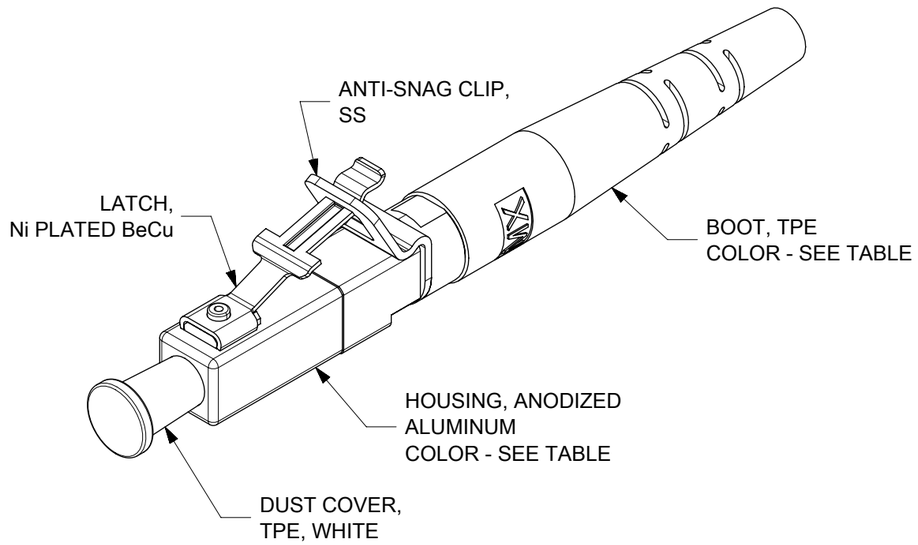

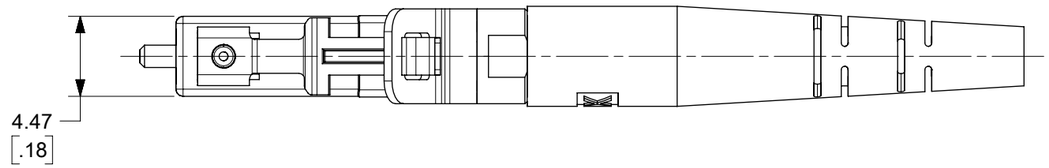

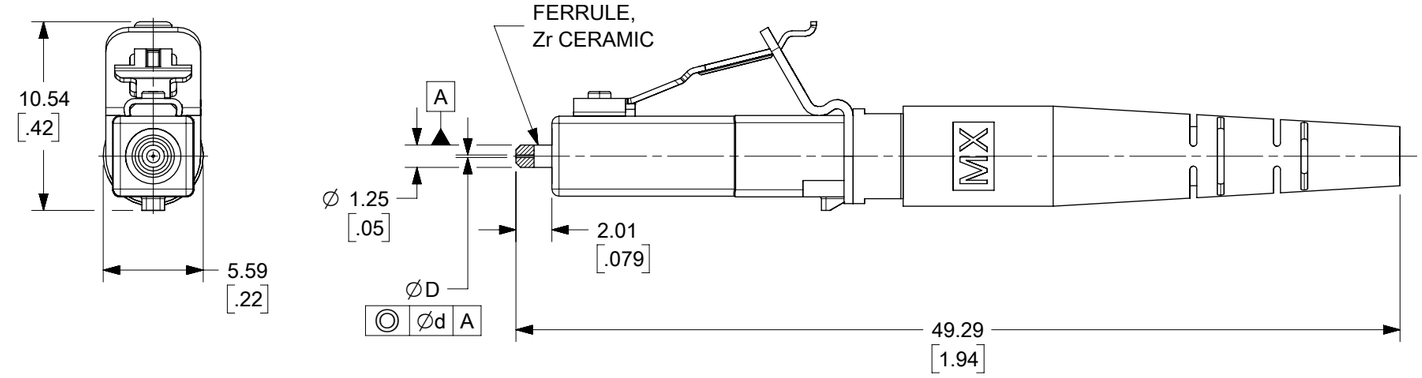

NOTES:

1. INTERFACE DIMENSIONS COMPLY TO IEC 61754-20 TYPE LC CONNECTOR FAMILY.

2. FOR TERMINATION PROCEDURE USE STANDARD LC TERMINATION PROCEDURE. (RECOMMENDED CRIMP TOOL P/N 867445000)

3. CONNECTOR TESTED TO PASS FOLLOWING STANDARDS:
   - TELCORDIA GR-326-CORE (REFER TO TEST REPORT TR8796)

   CONNECTOR IS SOLD AS A KIT. CUSTOMER IS RESPONSIBLE TO PERFORM THEIR OWN TEST TO VERIFY THEIR TERMINATION PROCESS AS A FINISHED PRODUCT.

DOCUMENT STATUS	P1	RELEASE DATE	2021/02/18 16:18:15

FORMAT: master-B-portrait
REVISION: J
DATE: 2020/01/14

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: FA = 0, FC = 0, FP = 0

DIVISIONAL SYMBOLS

DIMENSION UNITS: MM/INCH | SCALE: 3:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± 0.5 °
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 655686
DRWN: IGUMIN 2021/02/15
CHK'D: GGENCHANOK 2021/02/18
APPR: GGENCHANOK 2021/02/18

INITIAL REVISION:
DRWN: WCHEN 2009/05/05
APPR: BANDREI 2009/05/06

THIRD ANGLE PROJECTION | DRAWING: B-SIZE | SERIES: 106397

molex

LC2+ METAL CONNECTOR, SIMPLEX. 1.6MM & 2.0MM CABLE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-106397-1302	PSD	001	C1

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE		1 OF 1