

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

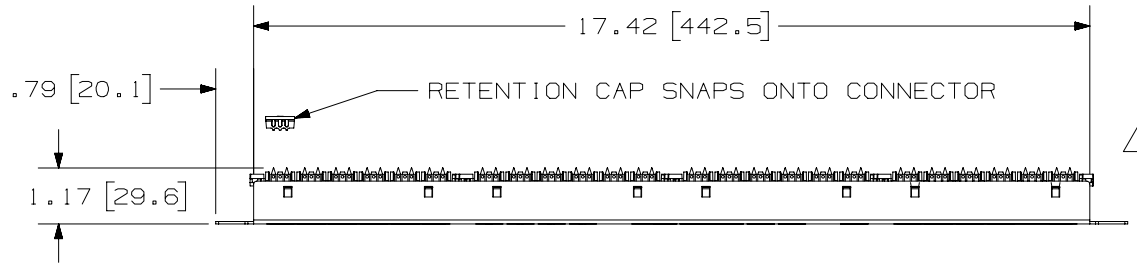

PANDUIT PART NO.	WEIGHT (APPROX.)
DP245E88TGY	1.25 lb (567 g)
DP245E88TGWH	1.25 lb (567 g)

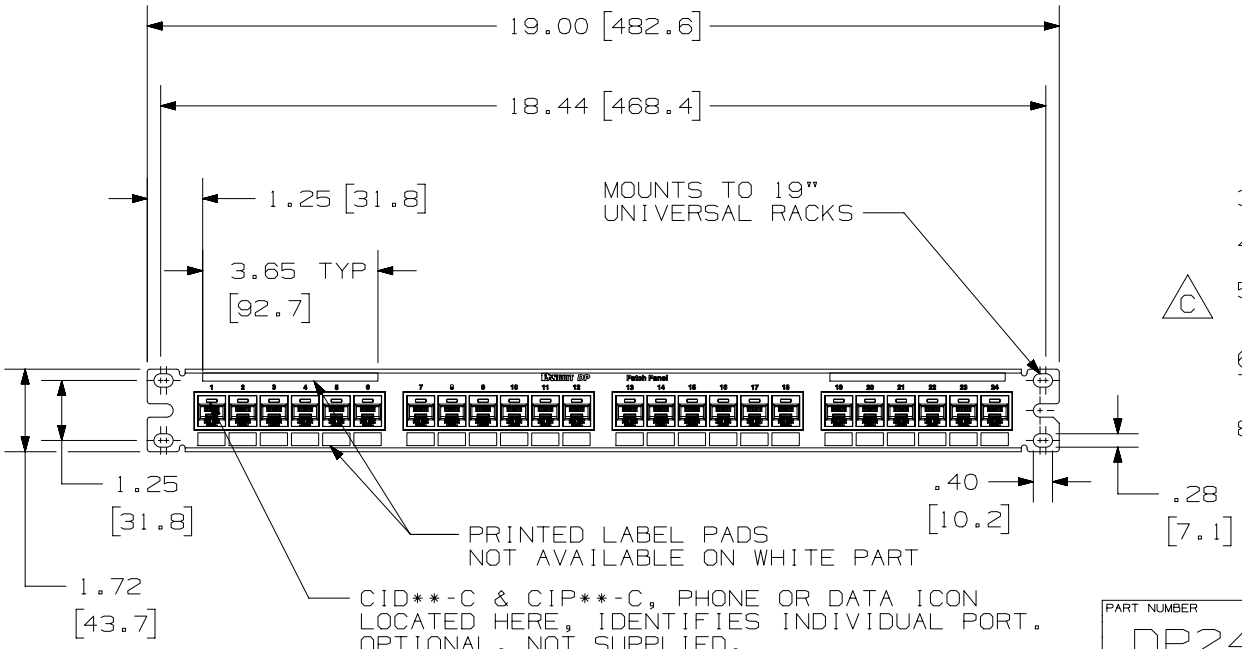

NOTES:
1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
2. MATERIAL:
   PANEL HOUSING: STEEL
   RJ45 MODULE: THERMOPLASTIC RESIN UL94V-0
   PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
   BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
   RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
3. 24 PORT PATCH PANEL 8 POSITION 8 WIRE.
4. THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
5. FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
6. DIMENSIONS IN [ ] ARE IN METRIC.
7. USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
8. RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
2	9-27-18	BAME	KRKE	MMR	B. ADDED P/N DP245E88TGWH; C. REMOVED M6 SCREWS	M09000HW
1	3-12-14	MDJR	REFR	EJH	A. UPDATED TITLE BLOCK.	02479-246
R	3-3-06	LZ	CEF	CEF	RELEASED TO PRODUCTION	02479-246

PART NUMBER: DP245E88TGY; DP245E88TGWH

TITLE: DP5E 24 PORT PATCH PANEL

CUSTOMER DRAWING

ITEM REVISION NAME: M02479JJ/01

DATASET FILE NAME: M02479JJ_DC246/01A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ± .010 [.3]
.XX ± .03[.8] ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: 02479-246

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
LZ	3-4-06	CEF	NONE		A

D10100DA/14