

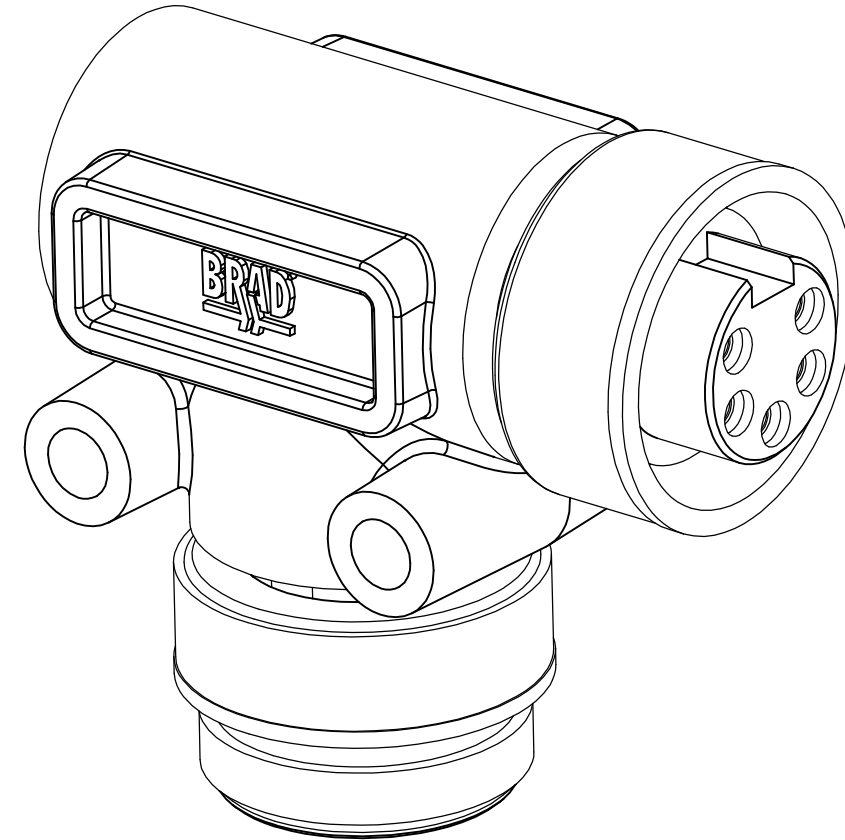


MATERIAL NUMBER	OLD PART NUMBER
130018-0210	41481

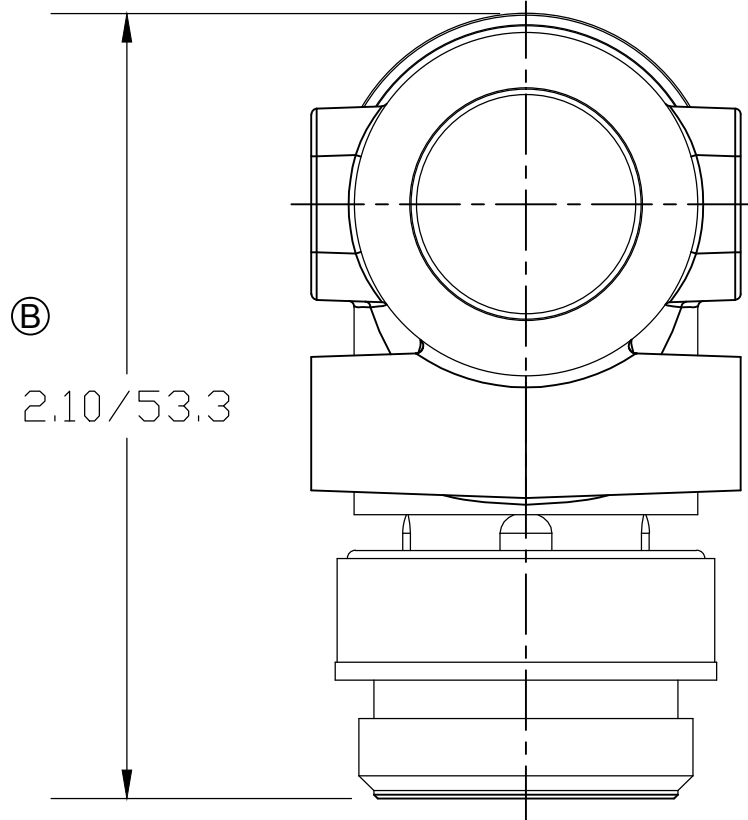

SCHEMATIC

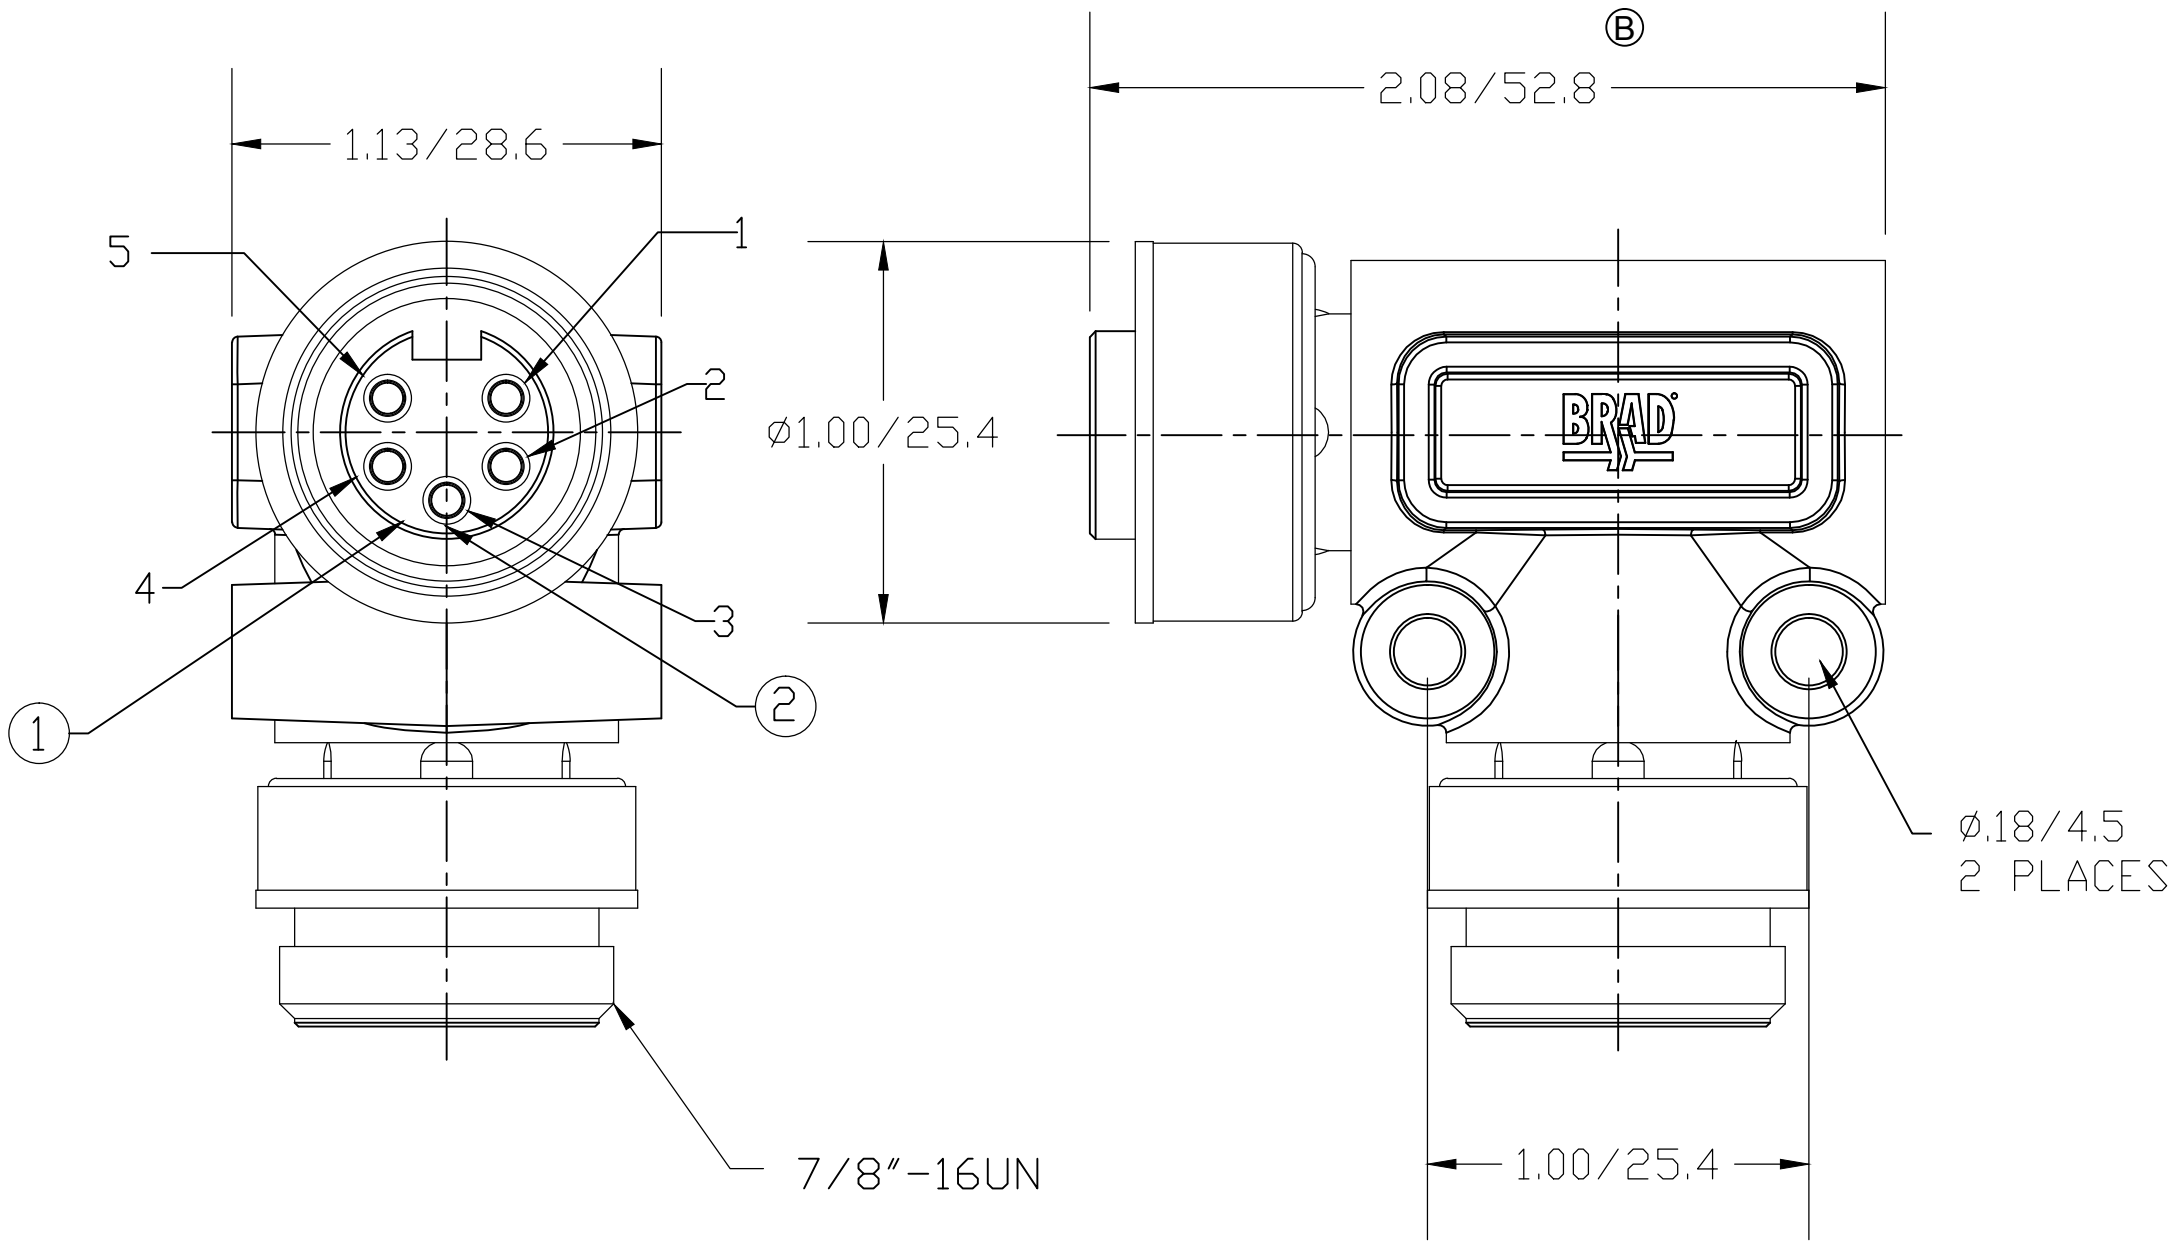

VOLTAGE RATING	600 VAC/VDC
AMPERAGE RATING	8 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	PVC	YELLOW
2	CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	COUPLING NUT	ZINC DIE CAST	BLACK E-COATED
4	OVERMOLD	PVC	YELLOW

UPDATE DIMENSIONS EC NO: IPG2018-0245 DRWN: CCHRASTK 2017/12/04 CH'KD: RSTONE 2017/10/27 APPR: BWOODMAN	DESCRIPTION	QUALITY SYMBOL ▽=0 ∠C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ----	DESIGN UNITS UNKNOWN	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY RDOMZALS		DATE 2017/12/01	TITLE MC 5P FEMALE/MALE 90 ADAPTER ----			
			4 PLACES	±----	±----	CHECKED BY JM		DATE 2009/08/25				
			3 PLACES	±----	±----	APPROVED BY		DATE				
			2 PLACES	±----	±.01	-----		-----		molex MOLEX INCORPORATED		
			1 PLACE	±0.3	±----	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-130018-002		SHEET NO. 1 OF 1		
			ANGULAR ±----°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						
B	REV				SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						