

FRONT VIEW - FEMALE INSERT




1 BLACK #1
2 BLACK #2
3 BLACK #3
4 GREEN/YELLOW

FRONT VIEW - MALE INSERT



1 BLACK #1
2 BLACK #2
3 BLACK #3
4 GREEN/YELLOW

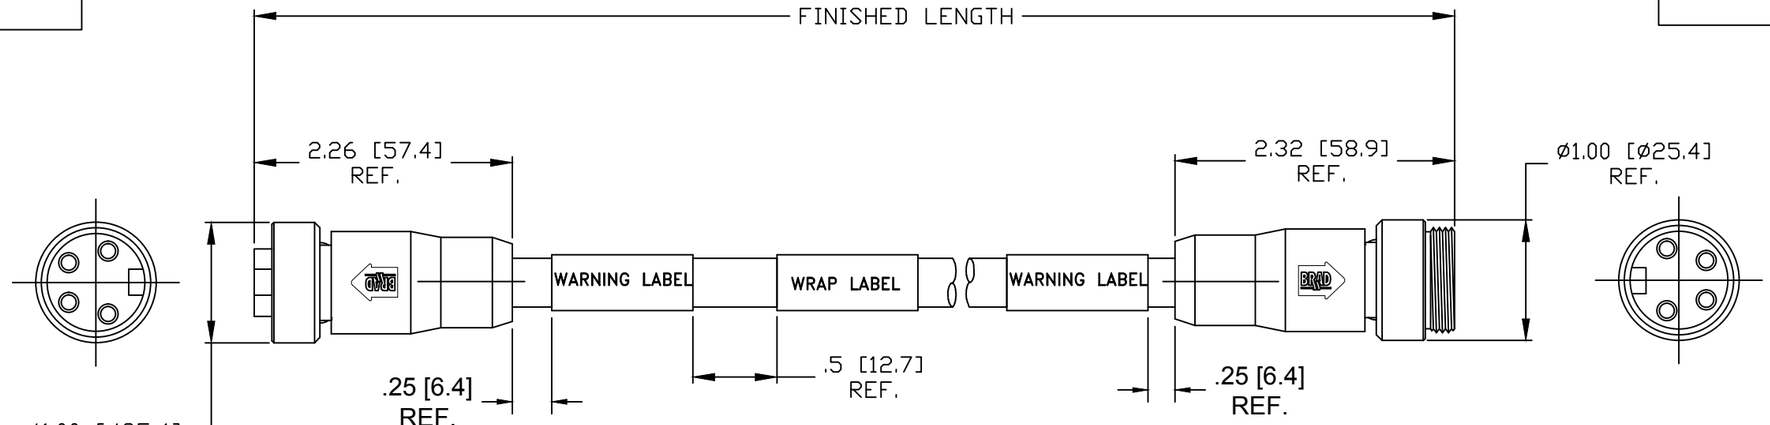

114030K21MXXXG

Cable type
14/4 AWG
black TPE

Finished Length
M005 = .5 Meters
M010 = 1 Meter

MECHANICAL
CONTACT : GOLD/NICKEL OVER COPPER ALLOY
INSERT : BLACK PVC
COUPLING NUT: ZINC DIE CAST, BLACK E-COAT
MOLDED BODY: BLACK PVC
CABLE: 14 AWG 4 CONDUCTORS BLACK TPE JACKET
CABLE MARKING: [MFG. UL FILE NO.] 14 AWG (2.08mm^2)
UL TYPE TC-ER/MTW (UL) THHN/THWN
600V 90C DRY 75C WET OIL RES SUN
RES [MFG. CSA FILE NO.] CSA AWM
I/II A/B 105C W75 1000V -40C FT4

ELECTRICAL
VOLTAGE RATING: 600V AC/DC
AMPERAGE: 15A

ENVIRONMENTAL
PROTECTION: IP67

REV	DESCRIPTION
B	UPDATED DRAWING EC NO: IPG2016-1628 DRWN: GGUSTAFS 2016/06/02 CH'KD: MZIELINS 2016/06/15 APPR: BWOODMAN 2015/11/09

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±---
1 PLACE	±---	±---
ANGULAR ±---°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: INCH/MM
SCALE: NTS
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: KCOX01 DATE: 2015/10/19
CHECKED BY: BARDEN DATE: 2015/10/19
APPROVED BY: JFMURPHY DATE: 2015/11/09

TITLE: MINI CHANGE ASSEMBLY 4P MALE/FEMALE 14/4 AWG TPE BLACK

MOLEX INCORPORATED

MATERIAL NO.: SEE MATRIX
DOCUMENT NO.: SD-130062-023
SHEET NO.: 1 OF 1
SIZE: B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION