
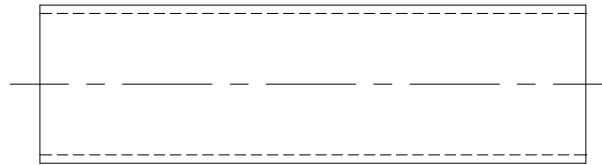
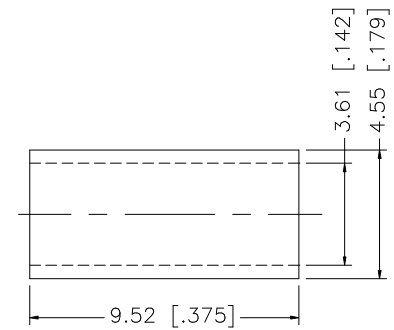

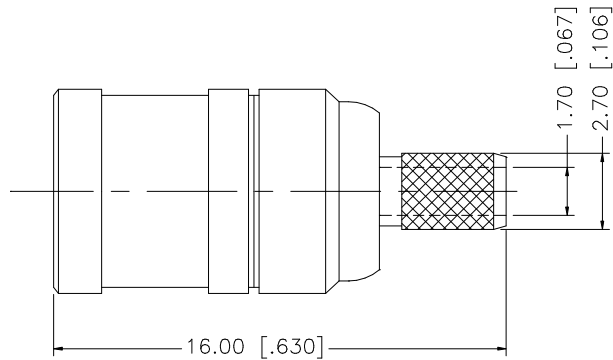


REV.	DATE	DESCRIPTION
A	01/30/04	UPDATE DRAWING FORMAT

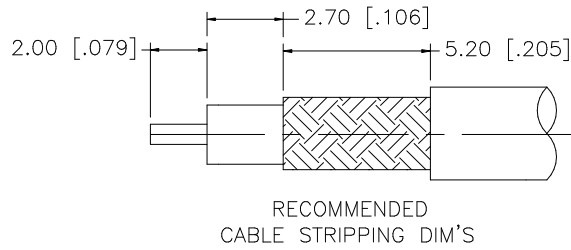

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex									
8						DRAWN	G.R.S.						01/30/04				
7						CHECKED			PART DESCRIPTION SMB CRIMP PLUG (FOR RG–316U/D CABLE)								
6						ISSUED											
5	HEAT SHRINK TUBE		BLACK	1		SHEET	1 OF 1		PART NO. 142187								
4	FERRULE	COPPER	GOLD	1													
3	CONTACT PIN	BER. COPPER	GOLD	1		CAD FILE	C:/142/142187.DWG		DWG. NO.		142187.DWG	REV.	A	SIZE	A	SCALE	NA
2	INSULATOR	TEFLON	NATURAL	1													
1	BODY	BRASS	GOLD	1													
	DESCRIPTION	MATERIAL	FINISH	QTY													