


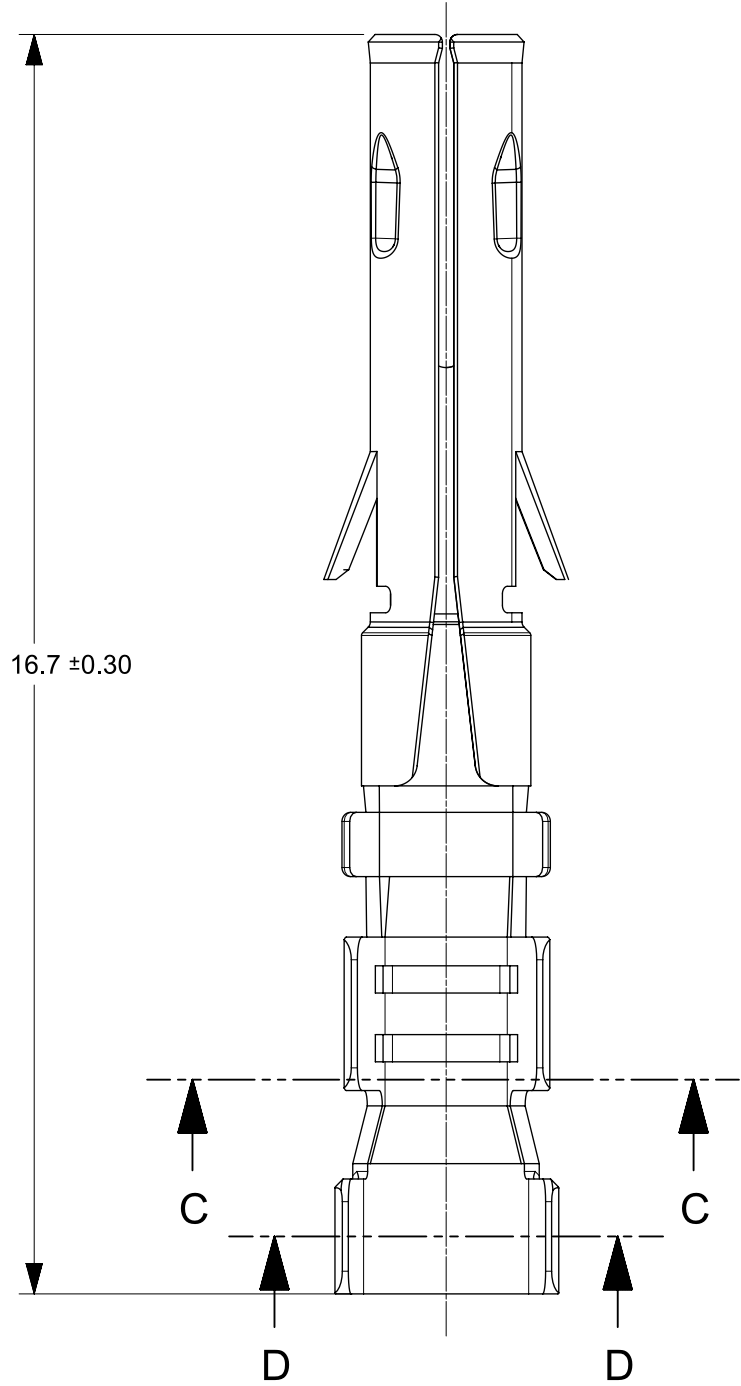



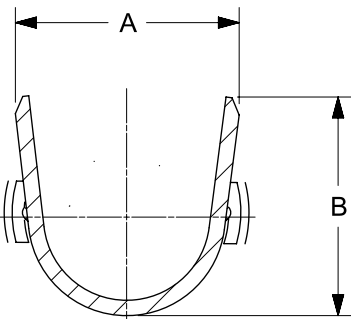


SECTION C-C


- NOTES:
1. MATERIAL: CARTRIDGE BRASS ALLOY.
 2. FINISH: PREPLATED OVERALL TIN ONLY- BRIGHT FINISH AND MIN THICKNESS 1.5µm.
 3. PRODUCT SPECIFICATION: 1501760001-PS.
 4. PACKAGING SPEC. REFER PK-150180-001.
 5. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPEC PS-45499-002.
 6. TERMINAL TO BE USED WITH SERIES 150178 AND 150179.
 7. TERMINAL MATES WITH THE SERIES 150180.

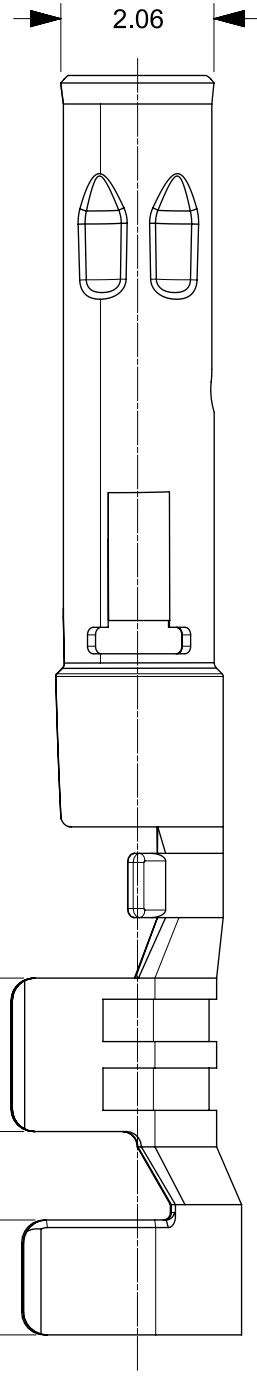



SECTION D-D

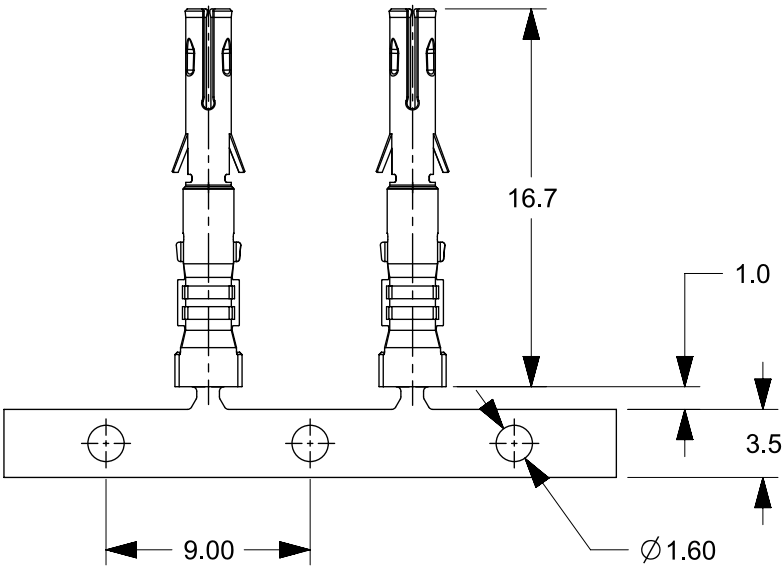

STRIP LAYOUT

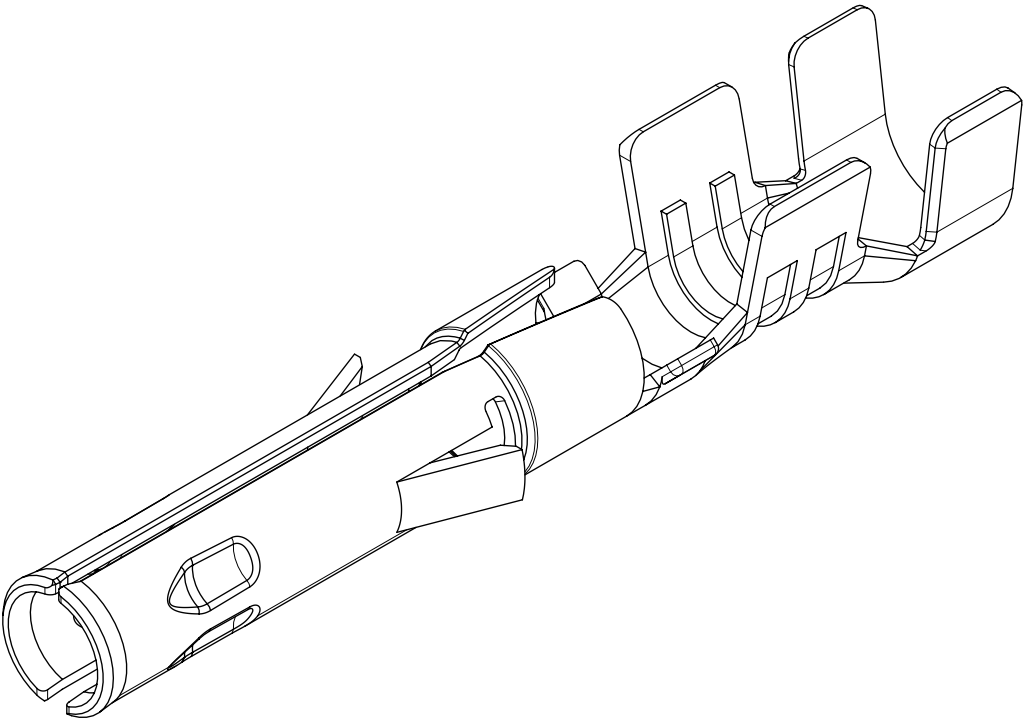

REELING DIRECTIONS

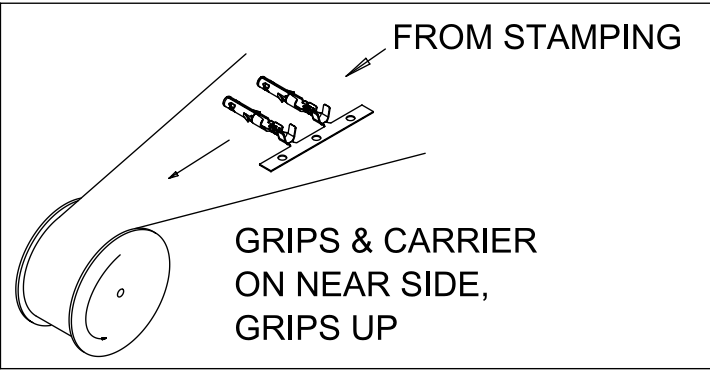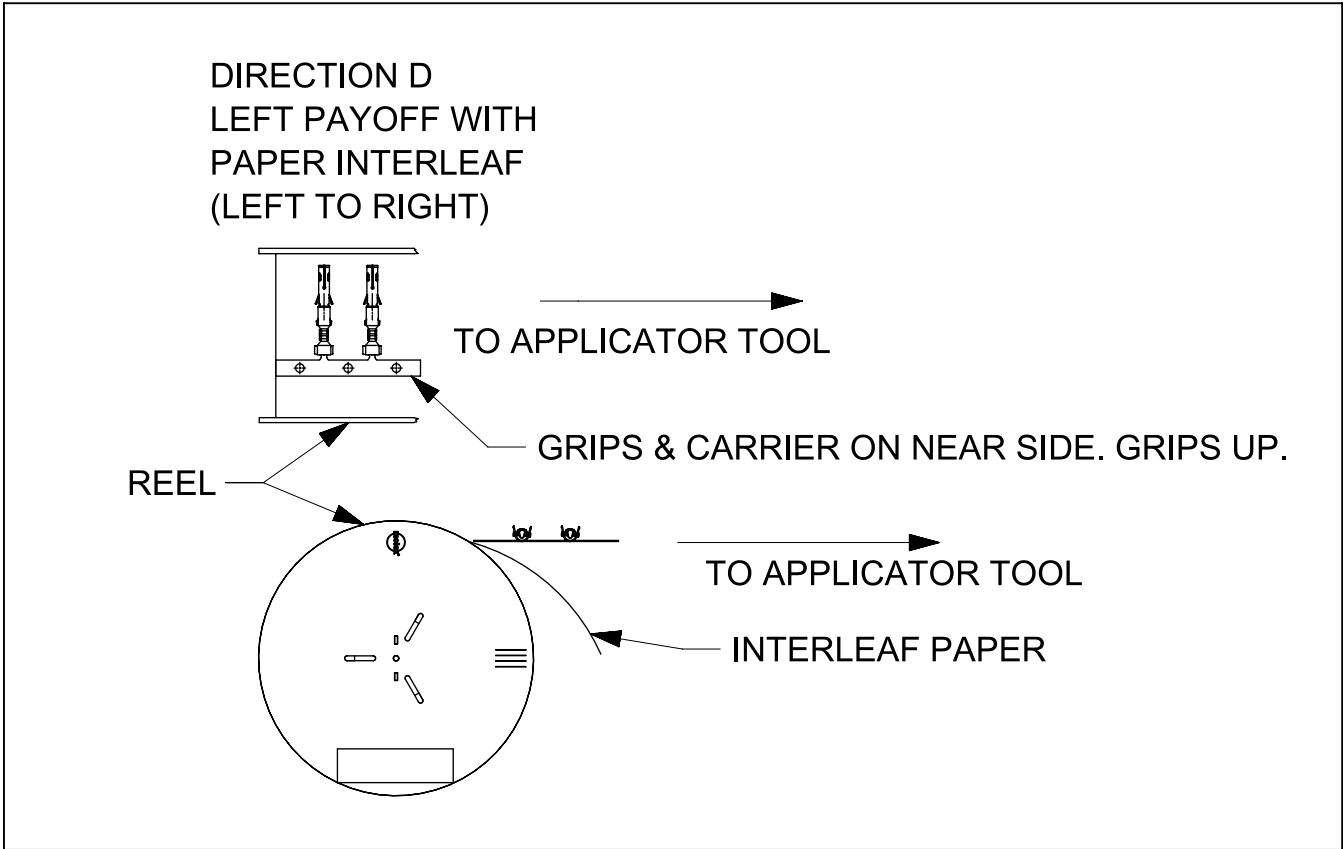

SI. NO	PART NUMBER	WIRE RANGE	WIRE STYLE	DIM A	DIM B	DIM X	DIM Y
1	1501811016	16-18 AWG	16 AWG, UL1061	2.96	2.90	2.72	2.71
			18 AWG, UL1007	2.96	2.90	2.72	2.71
			18 AWG, UL1061	2.96	2.90	2.72	2.71
2	1501811020	20-22 AWG	20 AWG, UL1007	2.58	2.40	2.44	2.03
			20 AWG, UL1061	2.58	2.40	2.44	2.03
			22 AWG, UL1007	2.58	2.40	2.44	2.03
			22 AWG, UL1061	2.58	2.40	2.44	2.03

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: DESCRIPTION UPDATED			molex STANDARD .062"+ FEMALE CRIMP TERMINAL					
			10:1										
	GENERAL TOLERANCES (UNLESS SPECIFIED)												
DIVISIONAL SYMBOLS	ANGULAR TOL		± 0.5 °		EC NO: 647195			PRODUCT CUSTOMER DRAWING					
	4 PLACES		±		DRWN: PRADEA 2020/10/09								
	3 PLACES		±		CHK'D: NCSR 2020/10/19								
	2 PLACES		± 0.25		APPR: NCSR 2020/10/19								
	1 PLACE		± 0.35		INITIAL REVISION:								
	0 PLACES		±		DRWN: SS06 2015/05/28								
					APPR: KPRASAD 2015/06/04								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A2-SIZE	150181	SEE CHART		GENERAL MARKET		1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2020/10/19 14:19:14
-----------------	----	--------------	---------------------