
Rev	AWO #	Description	Date	Appr
-		RELEASED	01/17/07	

APPROVED: _____

DATE: _____ TITLE: _____

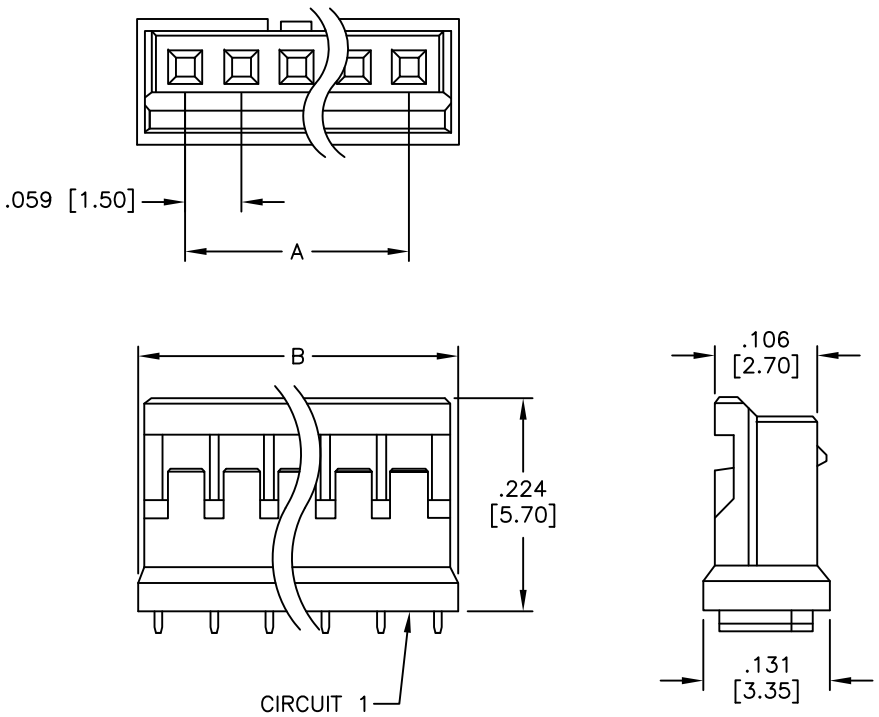

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V–0

Insulator color: Ivory

Plating:

Tin over Nickel underplate overall

Electrical:

Operating voltage: 100 VAC max

Current rating: 1.5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: –25°C to +85°C

Environmental:

Lead free, RoHS compliant. RoHS COMPLIANT

A=.059 [1.50] X NO. OF SPACES

B=.059 [1.50] X NO. OF SPACES +.102 [2.60]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	BW	01/17/07
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX1.5mm HOUSING

SIZE	PART NO.	REV.
X	15CH-B-XX	-

REF: | SCALE: NTS | SHEET 1 OF 1