
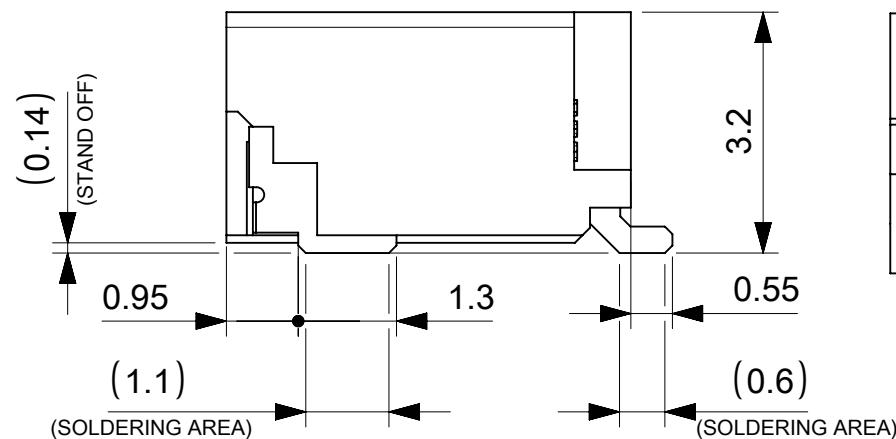
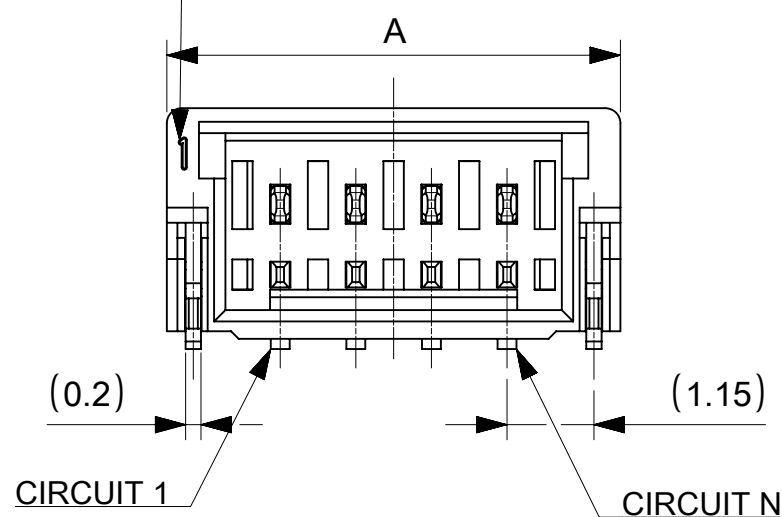


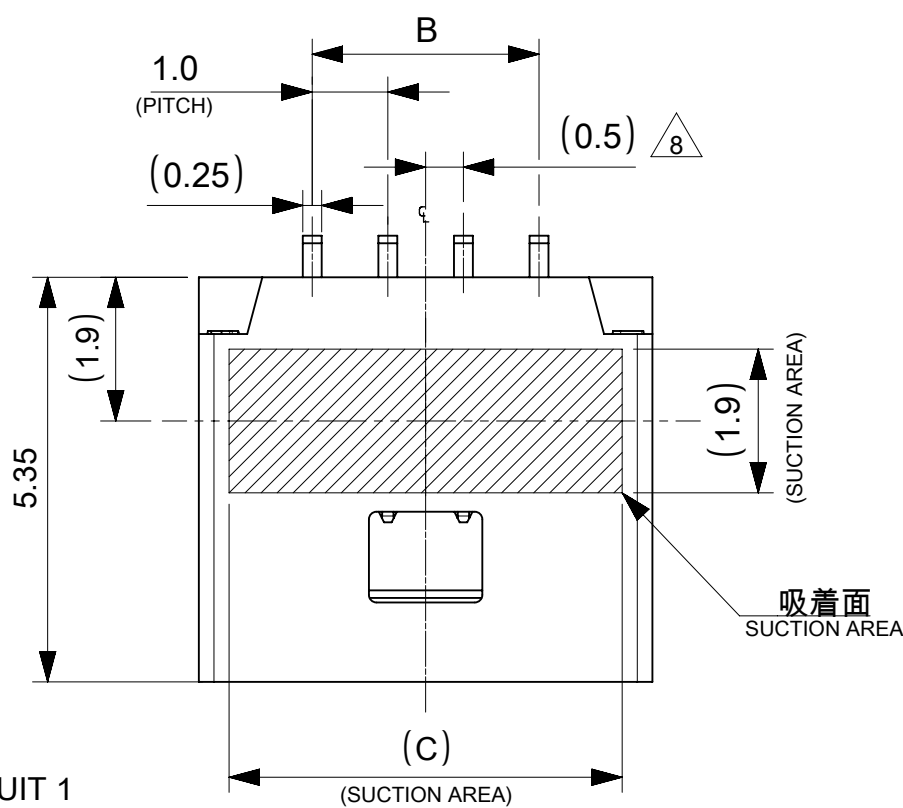


PLATING	PLATING THICKNESS [micro-meter MIN.]	SERIES No.	DRAWING No.
TIN	1.0	501568	5015680000-SD PSD 000
GOLD	0.1	202396	2023960000-SD PSD 000
	0.38	203558	2035580000-SD PSD 000

2 TABLE 1


6.2	4.0	7.0	5
5.2	3.0	6.0	4
4.2	2.0	5.0	3
3.2	1.0	4.0	2
C	B	A	極數 CIRCUIT SIZE

番号 NO.	部品 PART	材質 MATERIAL	
①	ウエハー WAFER	ポリアミド(PA), UL94V-0, 色 : SEE SHEET 6 POLYAMIDE(PA), UL94V-0, COLOR : SEE SHEET 6	
②	ソルダーピン SOLDER PIN	リン青銅 PHOSPHOR BRONZE	
		接点部 CONTACT AREA	金めっき : 0.76 MICRO-METER MIN. GOLD PLATING
		テール部 TAIL AREA	金めっき : 0.05 MICRO-METER MIN. GOLD PLATING
		下地めっき UNDER PLATING	ニッケルめっき : 1.27 MICRO-METER MIN. NICKEL
③	ネイル NAIL	黄銅 BRASS	
		テール部 TAIL AREA	錫めっき : 1.0 MICRO-METER MIN. MATTE TIN PLATING
		下地めっき UNDER PLATING	ニッケルめっき : 1.0 MICRO-METER MIN. NICKEL

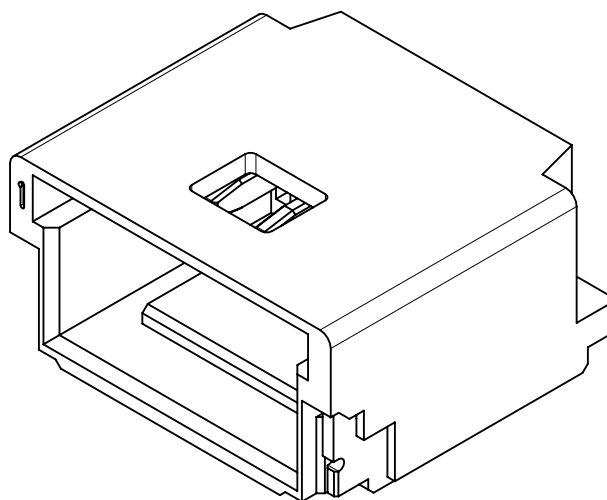

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex						
mm		NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED)				PICO-CLASP 1.0 W/B SINGLE ROW RA SMT INNER LOCK GOLD PLATING 0.76 MICRO-METER									
ANGULAR TOL ± 3.0°													
4 PLACES		± 0.2		EC NO: 794263		PRODUCT CUSTOMER DRAWING							
3 PLACES		± 0.2		DRWN: MIKEDA012023/06/28									
2 PLACES		± 0.2		CHK'D: SAKIYAMA2024/09/26									
1 PLACE		± 0.2		APPR: AIDA2024/09/27		DOCUMENT NUMBER 2035590000-SD							
0 PLACES		± 0.2		INITIAL REVISION: DRWN: AISHIKAWA2019/04/02 APPR: KOMURAKAMI2019/04/05									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE203559		SEE SHEET 6		1 OF 6			

FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01

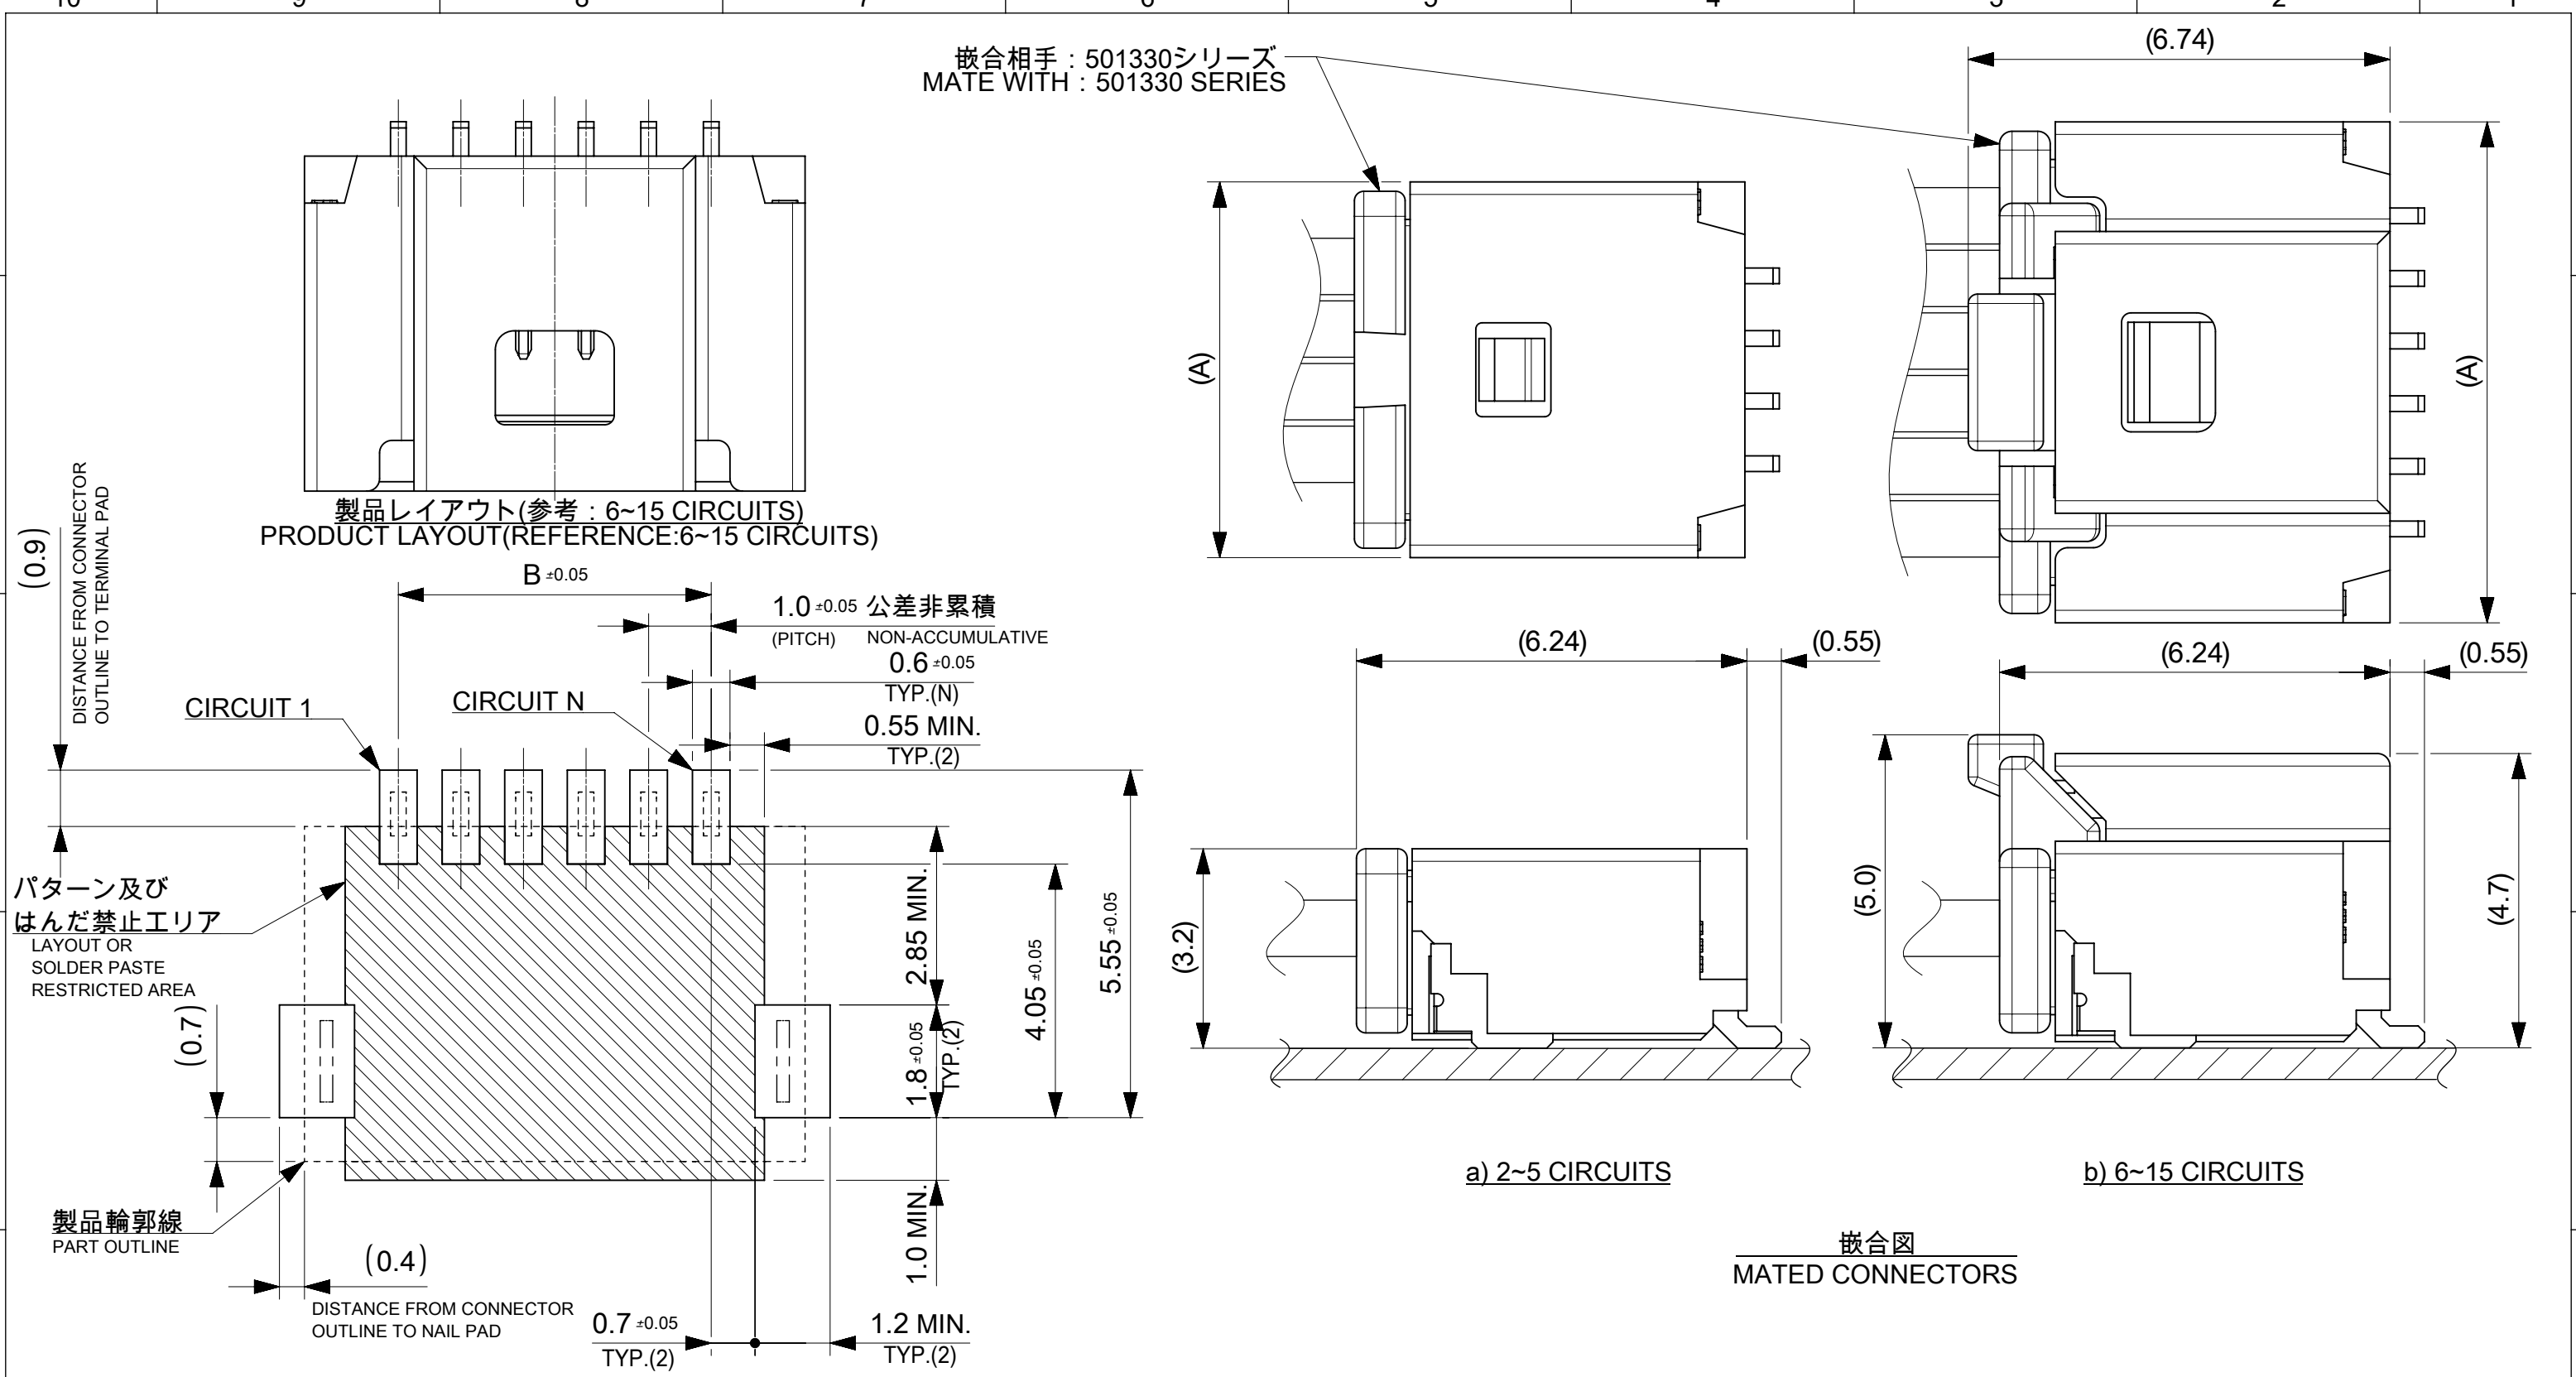

F

F

E

E

D

D

C

C

B

B



A

A


NOTES

10. 梱包数量
2-5 CIRCUIT: 1700個/リール
6-15 CIRCUIT: 1300個/リール
NUMBER OF CONNECTORS
2-5 CIRCUIT : 1700 PIECES/REEL
6-15 CIRCUIT : 1300 PIECES/REEL

- ## 11. リードテープ長さ LEAD TAPE LENGTH

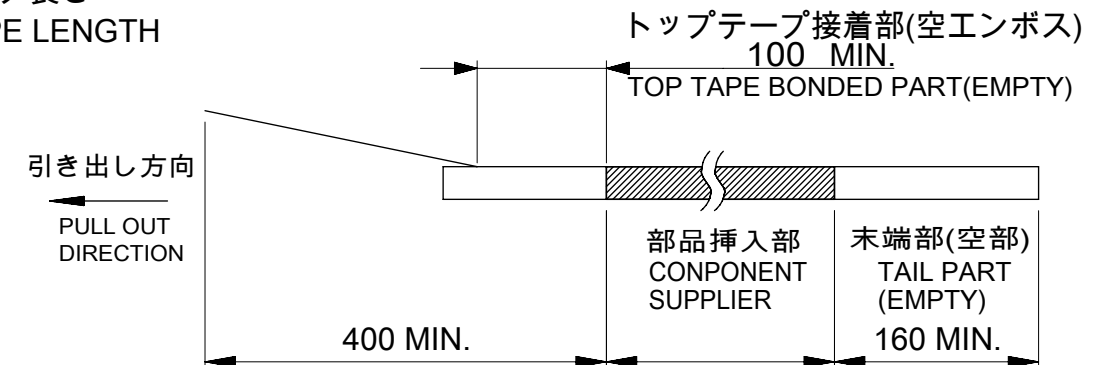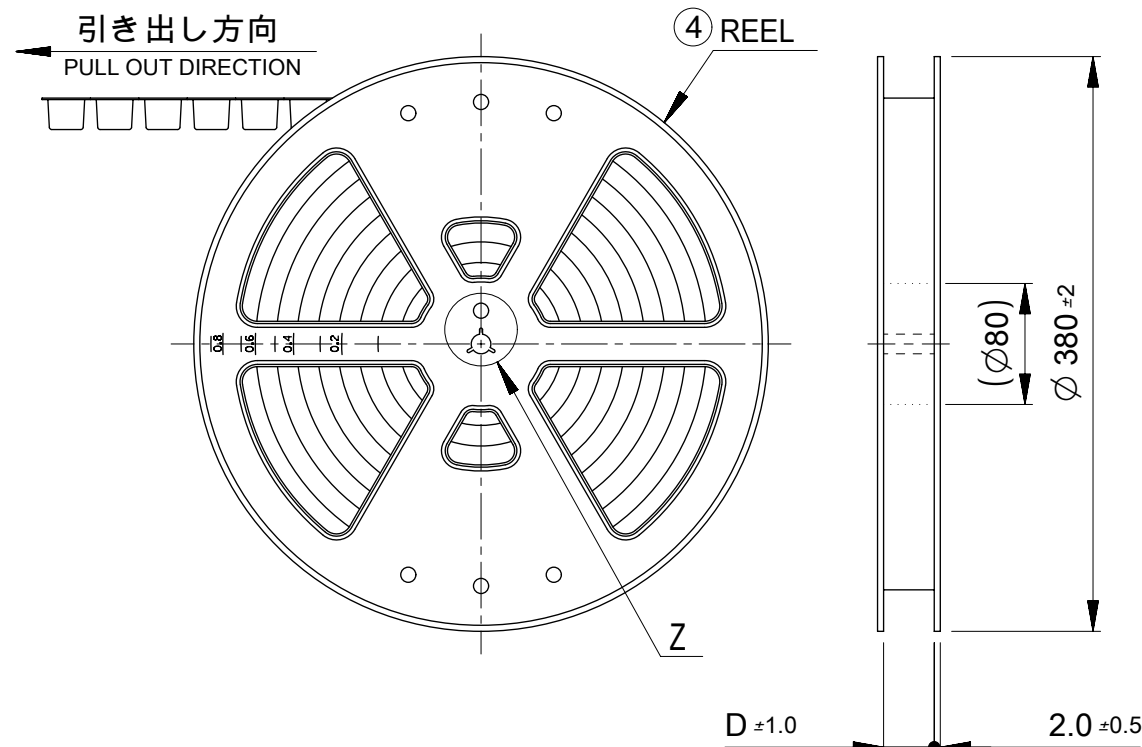

- | | | | |
|-----|---|------|--|
| 12. | トップテープの剥離強度はIEC60286-3に準拠。
TOP TAPE PEELING FORCE IS DEFINED BY IEC60286-3. | 33.4 | |
| | 2~5極品は乾燥剤入り、ハイバリア梱包による納品となります。
2~5 CIRCUITS IS DELIVERED IN A HIGH BARRIER PACKAGING WITH DESICCANT. | | |
| 14. | 梱包仕様書：2035599200 PS 200
PACKAGE SPECIFICATION: | | |
| 15. | 発注番号：SHEET 6 参照
ORDER No.：PLEASE REFER TO SHEET 6 FOR PRODUCT LIST. | | |

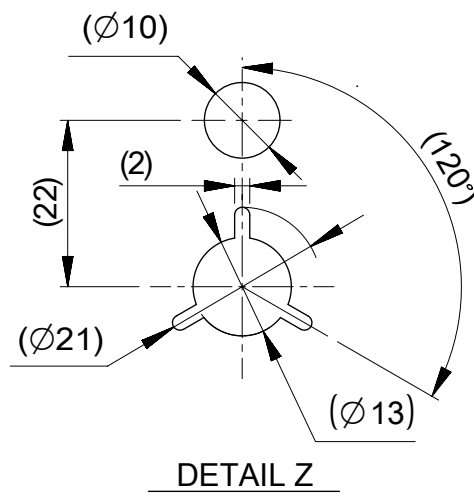



203559 - ** * *

極数 CIRCUIT SIZE	ハウジングカラー HOUSING COLOR	製品識別番号 IDENTIFICATION NUMBER
	0:NATURAL(BEIGE)	7:EMBOSSD PACKAGE

33.4	15
	14
	13
25.4	12
	11
	10
	9
	8
	7
	6
17.5	5
	4
	3
	2
D	極数 CIRCUIT SIZE

番号 NO.	部品 PART	材質 MATERIAL				
④	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>				
DOCUMENT STATUS		P1	RELEASE DATE	2024/09/27	10:55:26	


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC:		molex					
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)											
ANGULAR TOL		±	3.0 °			PICO-CLASP 1.0 W/B SINGLE ROW RA SMT INNER LOCK GOLD PLATING 0.76 MICRO-METER					
4 PLACES		±	0.2								
3 PLACES		±	0.2	EC NO: 794263 DRWN: MIKEDA01 2023/06/28 CHK'D: SAKIYAMA 2024/09/26 APPR: AIDA 2024/09/27		PRODUCT CUSTOMER DRAWING					
2 PLACES		±	0.2								
1 PLACE		±	0.2	INITIAL REVISION: DRWN: AISHIKAWA 2019/04/02 APPR: KOMURAKAMI 2019/04/05		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
0 PLACES		±	0.2			2035590000-SD		PSD	000	D	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER	SHEET NUMBER
				A3-SIZE		203559		SEE SHEET 6		4 OF 6	

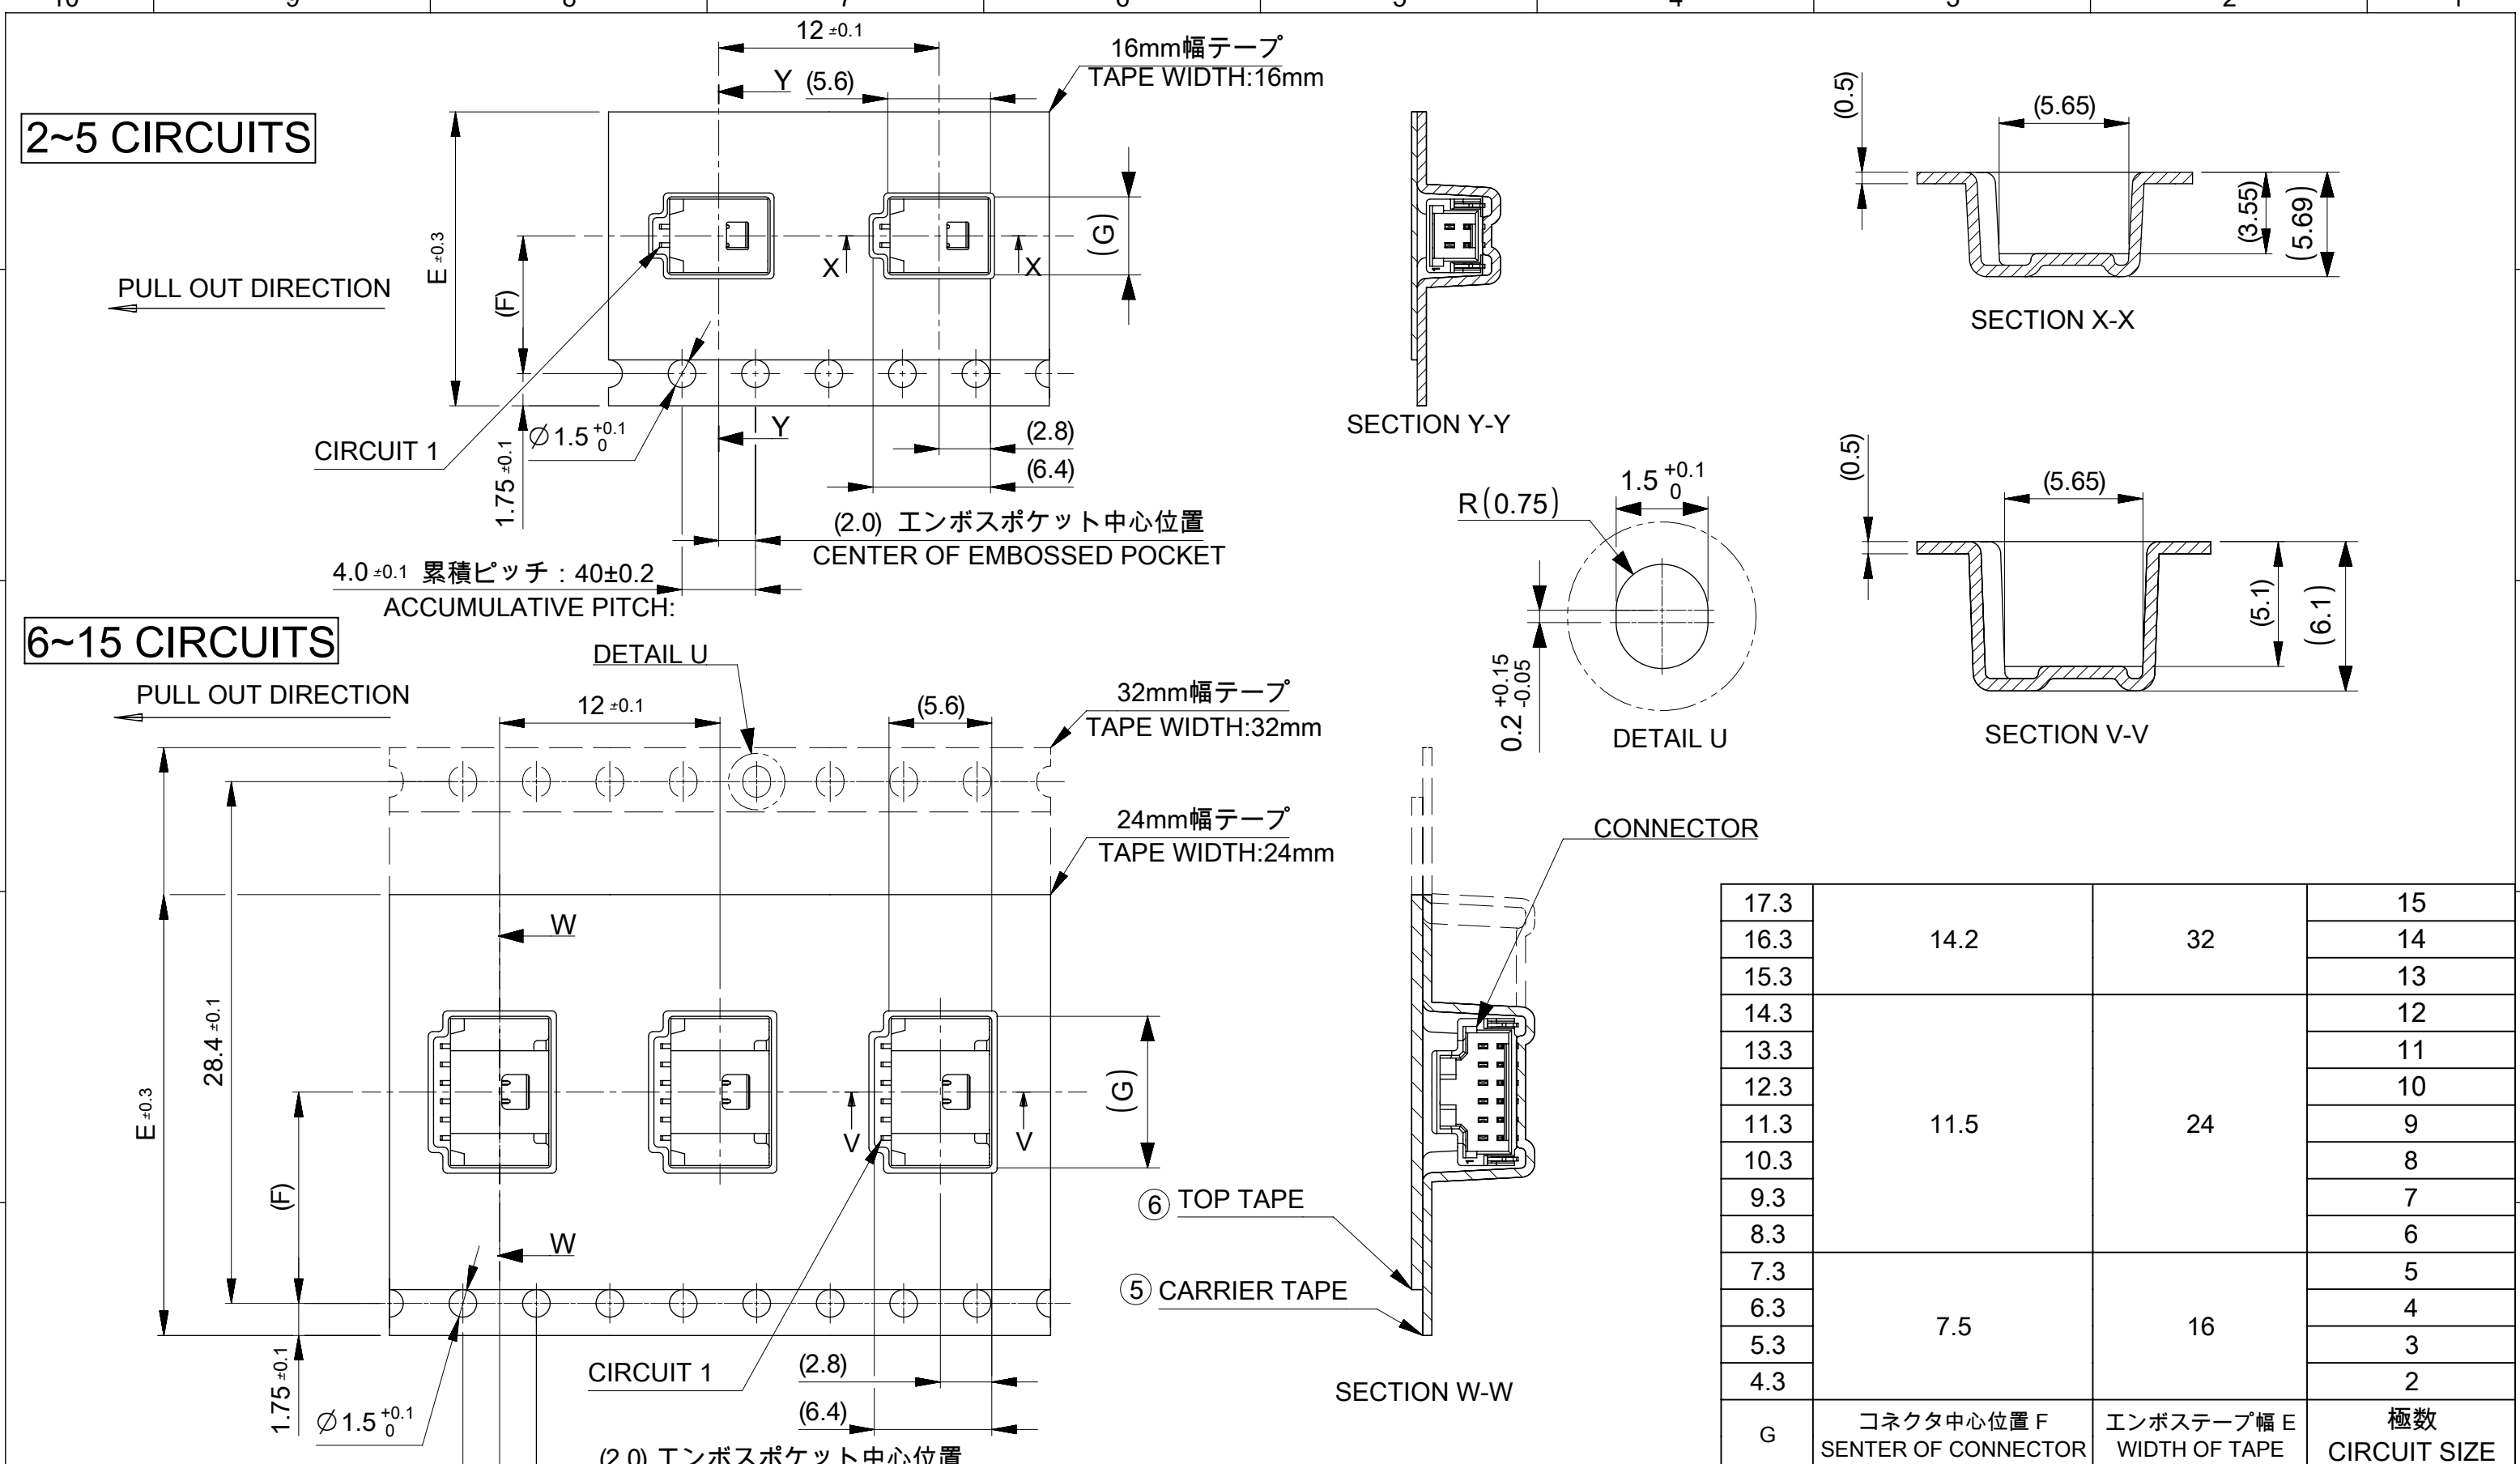

17.3	14.2	32	15
16.3			14
15.3			13
14.3	11.5	24	12
13.3			11
12.3			10
11.3			9
10.3			8
9.3	7.5	16	7
8.3			6
7.3			5
6.3			4
5.3			3
4.3			2
G	コネクタ中心位置 F SENER OF CONNECTOR	エンボステープ幅 E WIDTH OF TAPE	極数 CIRCUIT SIZE

番号 NO.	部品 PART	材質 MATERIAL
⑤	キャリアテープ CARRIER TAPE	ポリプロピレン(PP)、その他 POLYPROPYLENE(PP), etc
⑥	トップテープ TOP TAPE	ポリエチレン(PE)、その他 POLYETHYLENE(PE), etc

DOCUMENT STATUS	P1	RELEASE DATE	2024/09/27	10:55:26
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex PICO-CLASP 1.0 W/B SINGLE ROW RA SMT INNER LOCK GOLD PLATING 0.76 MICRO-METER								
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 794263 DRWN: MIKEDA01 2023/06/28 CHK'D: SAKIYAMA 2024/09/26 APPR: AIDA 2024/09/27											
ANGULAR TOL ± 3.0 °															
4 PLACES		± 0.2													
3 PLACES		± 0.2													
2 PLACES		± 0.2													
1 PLACE		± 0.2		INITIAL REVISION: DRWN: AISHIKAWA 2019/04/02 APPR: KOMURAKAMI 2019/04/05			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION				
0 PLACES		± 0.2					2035590000-SD		PSD	000	D				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		203559		SEE SHEET 6				5 OF 6	

