ITEM	PART#	DESCRIPTION	QTY	UOM
A	39014053	MiniFitJrPlg SR PnlMnt V-0 5Ckt	1	PC
B	39000124	MiniFit Term Crp Male C Bs Tin 16awg	5	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A5	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

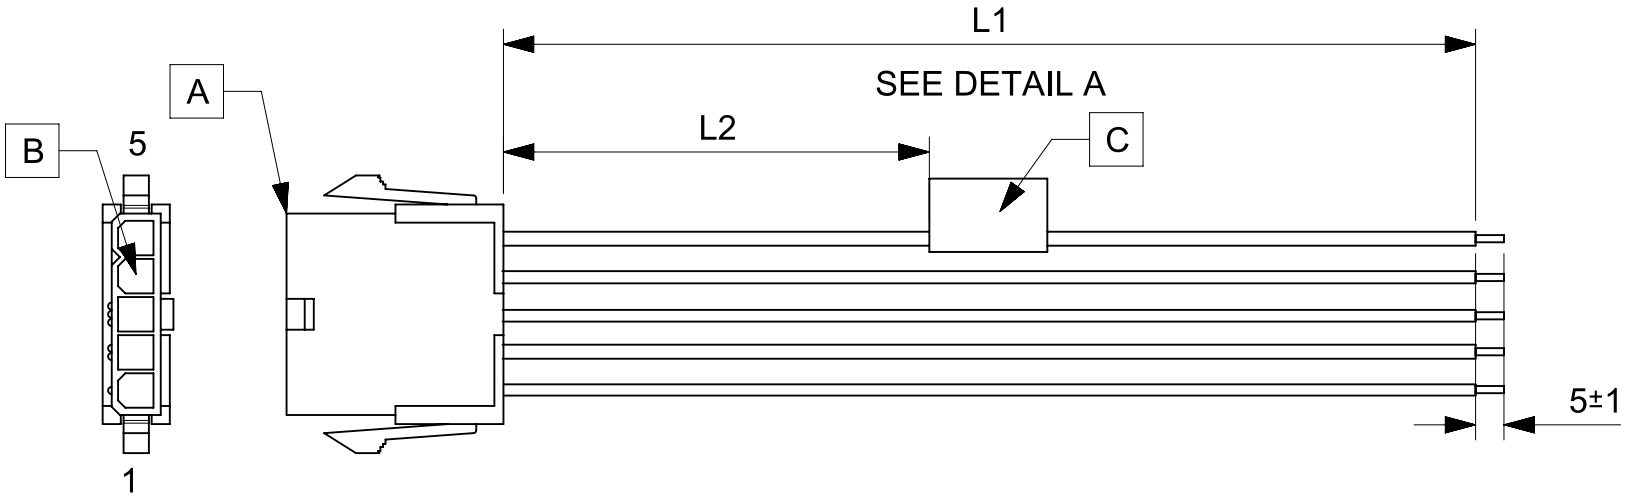


TABLE			
PART NUMBER	L1	L2	TITLE
2153231051	150±8	63 REF	MINIFIT JR SR M-S 5 CIRCUIT 150MM Sn
2153231052	300±10	138 REF	MINIFIT JR SR M-S 5 CIRCUIT 300MM Sn
2153231053	600±10	288 REF	MINIFIT JR SR M-S 5 CIRCUIT 600MM Sn

NOTES
1. Connector view shown is from mating side.
2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

DOCUMENT STATUS	P1	RELEASE DATE	2020/05/28 03:12:51

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FD = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS: mm
SCALE: NTS
GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± °
4 PLACES ±
3 PLACES ±
2 PLACES ±
1 PLACE ±
0 PLACES ±
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:
EC NO: 638380
DRWN: AS20 2020/04/06
CHK'D: RDESAI01 2020/05/28
APPR: RDESAI01 2020/05/28
INITIAL REVISION:
DRWN: AS20 2020/04/06
APPR: RDESAI01 2020/05/28

THIRD ANGLE PROJECTION
DRAWING: A4-SIZE
SERIES: 215323

molex

SEE TABLE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2153231051	PSD	000	A

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL MARKET	1 OF 1

FORMAT: master-tb-prod-A4
REVISION: J
DATE: 2020/01/14