

6		5		4	
ITEM	PART#	DESCRIPTION		QTY	UOM
A	39012025	Mini Fit Jr 2CKT RECP. HSG 555702R210		1	PC
B	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg		2	PC
C	--	PAPER PRINTED PAPER WHITE		1	PC

3		2		1	
FROM	TO	DESCRIPTION		COLOR	
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP		BLACK	
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP		BLACK	

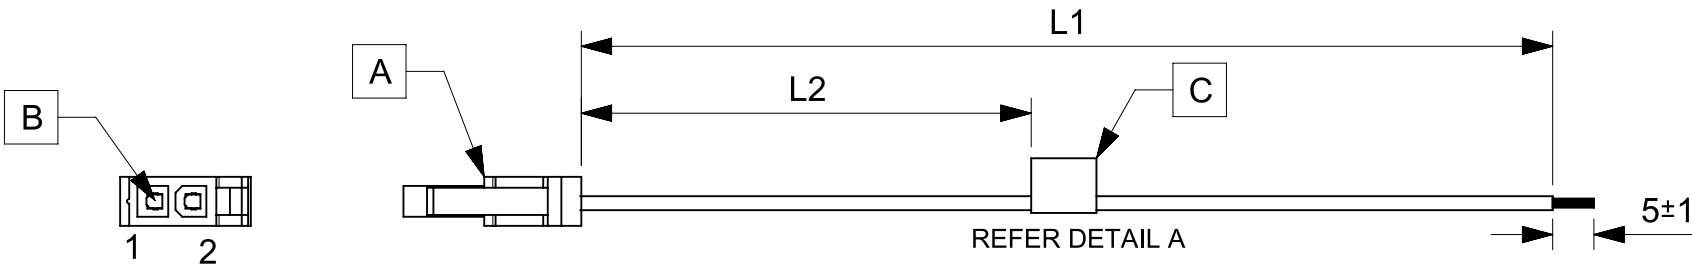


TABLE			
PART NUMBER	L1	L2	TITLE
2153261021	150±8	63 REF	MINIFIT JR DR R-S 2 CIRCUIT 150MM Sn
2153261022	300±10	138 REF	MINIFIT JR DR R-S 2 CIRCUIT 300MM Sn
2153261023	600±10	288 REF	MINIFIT JR DR R-S 2 CIRCUIT 600MM Sn

- NOTES
1. Connector view shown is from mating side.
 2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/19	A	INITIAL RELEASE	ARAJU

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: EC NO: 638379 DRWN: ARAJU 2020/03/19 CHK'D: RDESAI01 2020/05/28 APPR: RDESAI01 2020/05/28 INITIAL REVISION: DRWN: ARAJU 2020/03/19 APPR: RDESAI01 2020/05/28				molex						
	mm		NTS												
	GENERAL TOLERANCES (UNLESS SPECIFIED)								SEE TABLE						
	ANGULAR TOL ± °														
DIVISIONAL SYMBOLS	4 PLACES		±						PRODUCT CUSTOMER DRAWING						
	3 PLACES		±												
	2 PLACES		±						DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
	1 PLACE		±						2153261021		PSD	000	A		
	0 PLACES		±												
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
						A4-SIZE		215326		SEE TABLE		GENERAL MARKET		1 OF 1	

RELEASE STATUS	P1	RELEASE DATE	2020/05/28	07:59:24
----------------	----	--------------	------------	----------