ITEM	PART#	DESCRIPTION	QTY	UOM
A	5055700401	2.0W/B SINGLE REC HSG 4CKT BLK	1	PC
B	5055721000	2.0W/B REC CRIMP TERM CHAIN H>F	4	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A3	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A4	--	1X22AWG DISC SR-PVC BK UL10002	BLACK

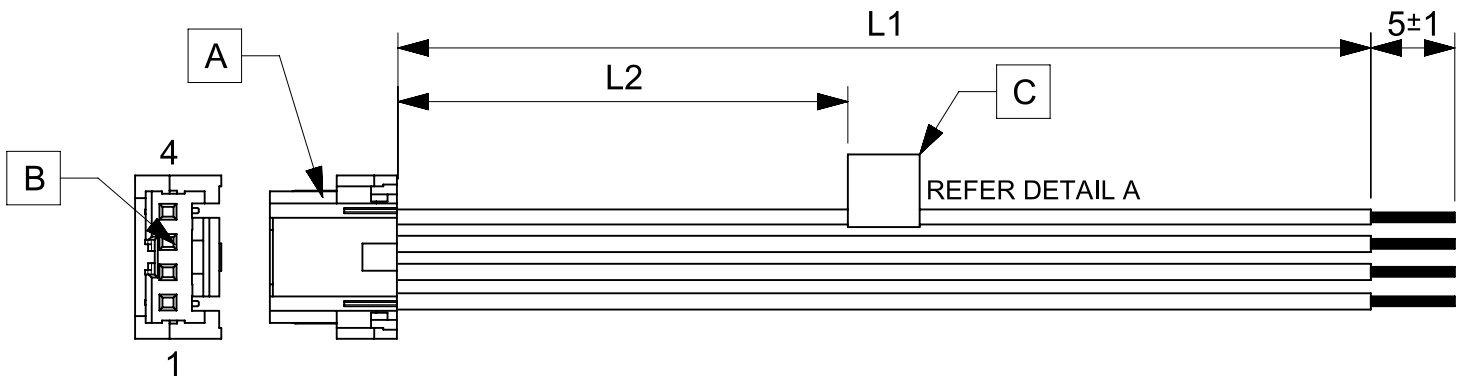


TABLE			
PART NUMBER	L1	L2(REF)	TITLE
2181021040	50±3	12	MICROLOCK PLUS 2.0 RS 4CKT 50MM DISC Sn
2181021041	100±5	37	MICROLOCK PLUS 2.0 RS 4CKT 100MM DISC Sn
2181021042	150±8	62	MICROLOCK PLUS 2.0 RS 4CKT 150MM DISC Sn
2181021043	300±10	137	MICROLOCK PLUS 2.0 RS 4CKT 300MM DISC Sn
2181021044	600±10	287	MICROLOCK PLUS 2.0 RS 4CKT 600MM DISC Sn

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2021/03/12	A	INITIAL RELEASE	AS20

NOTES
1. CONNECTOR VIEW SHOWN IS FROM MATING SIDE.
2. FREE ENDS MUST BE STRIPPED, TWISTED & TINNED. THE LENGTH OF TINNING IS 5±1MM. TINNING DIA MUST BE 0.9MM MAX.
3. LABEL TEXT MUST BE 2MM MAX IN HEIGHT WITH ARIAL FONT.
4. LABEL MUST BE WRAPPED IN FLAG TYPE.

DOCUMENT STATUS	P1	RELEASE DATE	2021/05/26 12:08:20

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FD = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS: mm
SCALE: NTS
GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± °
4 PLACES ±
3 PLACES ±
2 PLACES ±
1 PLACE ±
0 PLACES ±
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:
EC NO: 665161
DRWN: AS20 2021/03/12
CHK'D: RDESAI01 2021/05/26
APPR: RDESAI01 2021/05/26
INITIAL REVISION:
DRWN: AS20 2021/03/12
APPR: RDESAI01 2021/05/26

THIRD ANGLE PROJECTION
DRAWING: A4-SIZE
SERIES: 218102

molex

SEE TABLE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2181021040	PSD	000	A

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL MARKET	1 OF 1

FORMAT: master-tb-prod-A4
REVISION: J
DATE: 2020/01/14