

6		5		4	
ITEM	PART#	DESCRIPTION		QTY	UOM
A	2059792061	M-ONE 2.0 RECHSG 6CKT BK		1	PC
B	561349001	2.0 WTB CONN CRIMP REC AWG#22-#24 CHAIN		6	PC
C	--	PAPER PRINTED PAPER WHITE		1	PC

3		2		1	
FROM	TO	DESCRIPTION		COLOR	
A1	--	1X22AWG DISC PVC BK UL1569 HOOKUP		BLACK	
A2	--	1X22AWG DISC PVC BK UL1569 HOOKUP		BLACK	
A3	--	1X22AWG DISC PVC BK UL1569 HOOKUP		BLACK	
A4	--	1X22AWG DISC PVC BK UL1569 HOOKUP		BLACK	
A5	--	1X22AWG DISC PVC BK UL1569 HOOKUP		BLACK	
A6	--	1X22AWG DISC PVC BK UL1569 HOOKUP		BLACK	

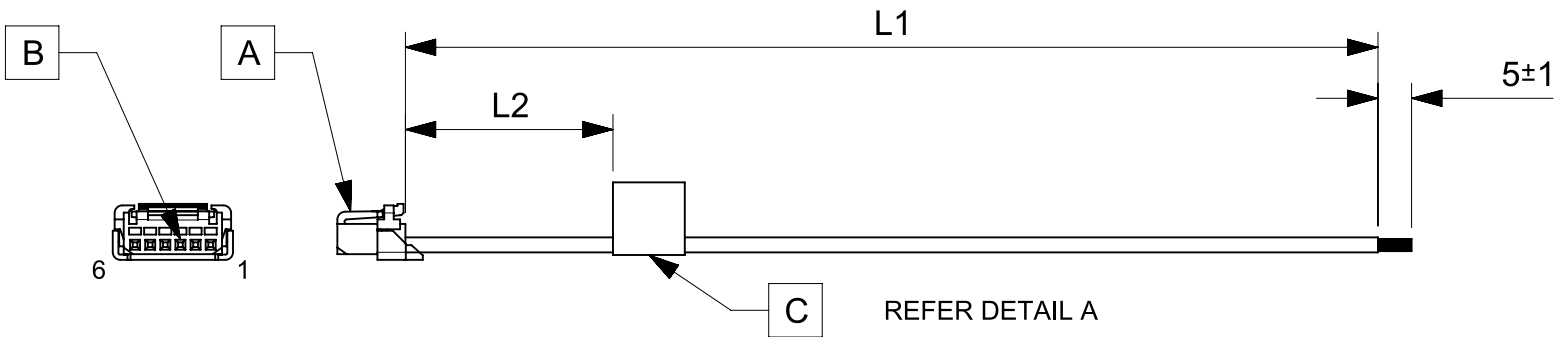


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2196531060	50±3	15	Micro-One ISL R-S 6ckt 50mm disc Sn
2196531061	100±3	15	Micro-One ISL R-S 6ckt 100mm disc Sn
2196531062	150±4	15	Micro-One ISL R-S 6ckt 150mm disc Sn
2196531063	300±4	15	Micro-One ISL R-S 6ckt 300mm disc Sn
2196531064	600±6	15	Micro-One ISL R-S 6ckt 600mm disc Sn

- NOTES
1. Connector view shown is from mating side.
 2. Label text must be 2mm max. in height with Arial font.
 3. Label must be wrapped in Flag type on a single cable.
 4. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning Dia must be 0.9 mm Max.

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2021/12/27	A	INITIAL RELEASE	SAIKIG

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DIMENSION UNITS	SCALE
	mm	NTS
	GENERAL TOLERANCES (UNLESS SPECIFIED)	
DIVISIONAL SYMBOLS	ANGULAR TOL	± °
	4 PLACES	±
	3 PLACES	±
	2 PLACES	±
	1 PLACE	±
	0 PLACES	±
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION
	DRWN: SAIKIG	2021/12/25
	CHK'D: MNARAYAN01	2022/01/11
	APPR: MNARAYAN01	2022/01/11
	INITIAL REVISION:	2021/12/25
	DRWN: SAIKIG	2022/01/11
	APPR: MNARAYAN01	2022/01/11
	DOCUMENT NUMBER	2196531060
	DOC TYPE	PSD
	DOC PART	000
	REVISION	A
	SHEET NUMBER	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2022/01/11	06:50:44
-----------------	----	--------------	------------	----------