
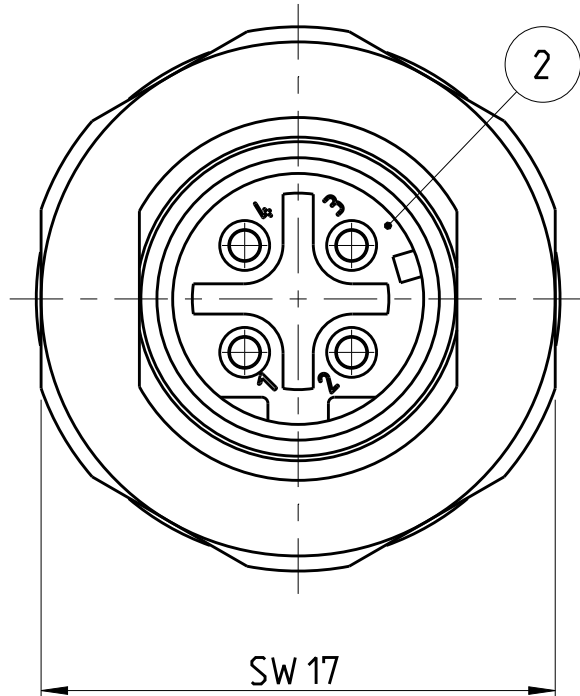
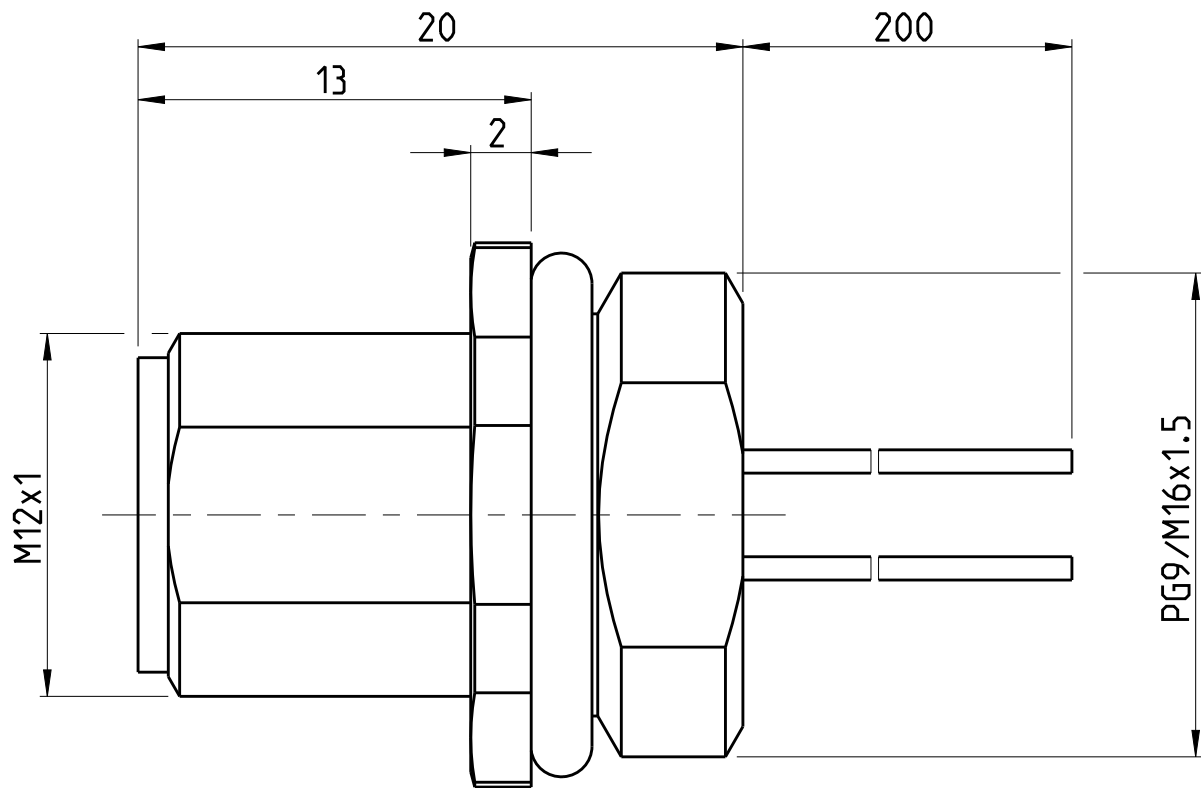


PROJECT NR.:		REVISIONS				
PRJ-14-000000805		ÄNDERUNGEN		BESCHREIBUNG		
P	LTR	DESCRIPTION		DATE	DWN	APVD
	A1	DRAWING PUBLISHED		22MAY2014	YR	CS
	A2	WIRE DETAILS ADDED		12DEC2014	TJ	PS


NOTES:

- 1 MATERIAL: ITEM NO. 1: HOUSING - BRASS NICKEL PLATED
ITEM NO. 2: CONTACT BODY - PA
ITEM NO. 3: CONTACT - CuSn
CONTACT FINISH - Au
- 2 ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATED
- 3 PACKAGING: 1 PIECE IN A BAG

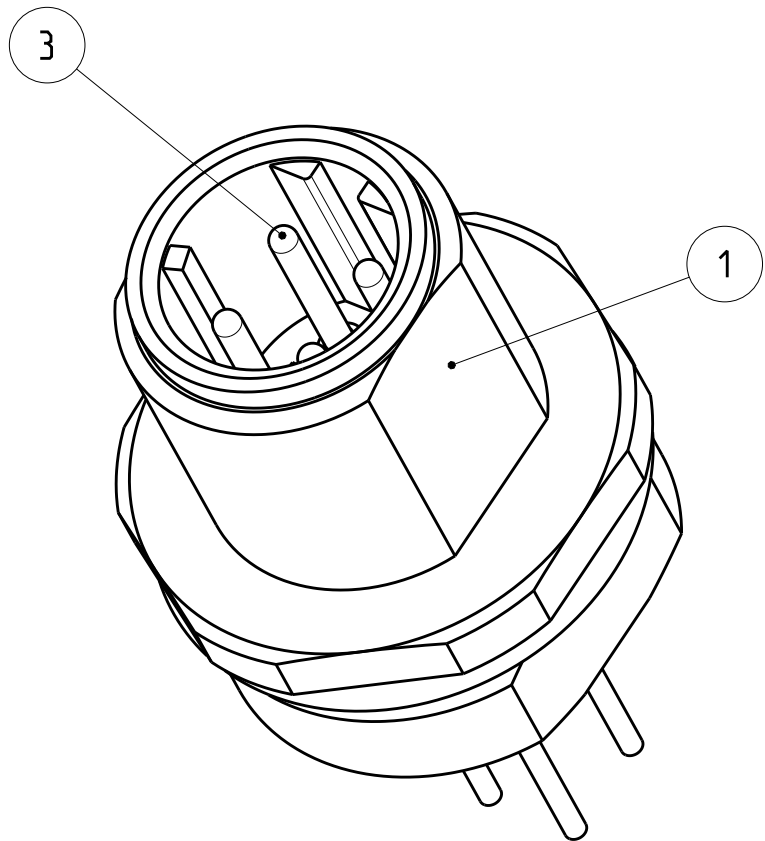


PIN ARRANGEMENT
D-CODING

3-2271136-2

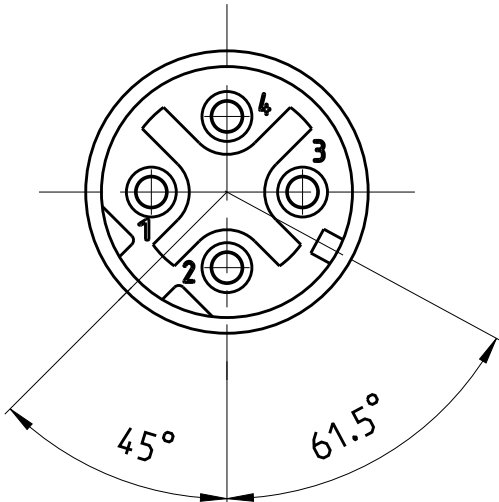

TECHNICAL DATA		3-2271136-2
RATED VOLTAGE	250V	
RATED IMPULSE VOLTAGE	2500V	
POLLUTION DEGREE	3	
OVERVOLTAGE CATEGORY	II	
MATERIAL GROUP	II	
RATED CURRENT	4A	
VOLUME RESISTIVITY	≤ 3mΩ	
DEGREE OF PROTECTION	IP68	
UPPER TEMPERATURE	+85 °C	
LOWER TEMPERATURE	-40 °C	

24 / 0.25mm2	1	4	3-2271136-2
WIRES AWG/mm2	MATERIAL	NUMBER OF POLES	TE-PART-NO.

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. BEMASSUNGEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS).															
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).				DWN 22MAY2014 YASHKUMAR CHK 22MAY2014 M.STRELOW APVD 22MAY2014 C.SCHREITLINGER											
DIMENSIONS: MASSEINHEITEN: [mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN		NAME		M12 RECEPTACLE, MALE PANEL FRONT MOUNT WITH WIRES, D-CODING									
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES/WINKEL ± FINISH/OBERFLÄCHE/FARBE		PRODUCT SPEC PRODUKT SPEC. 108-19483 APPLICATION SPEC VERARBEITUNGSPEC. 114-32127		RESTRICTED TO NUR FÜR									
MATERIAL		WEIGHT GEWICHT		SIZE		CAGE CODE		DRAWING NO ZEICHNUNGS-NR.		RESTRICTED TO NUR FÜR					
SEE NOTES		SEE NOTES		A2		00779		C-2271136		-					
Customer Drawing				/KUNDENZEICHNUNG				SCALE MASSSTAB		SHEET BLATT		1 OF 1 VON 1		REV A2	