
THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP
C	Updated Specifications	12-20-07	DP
D	Updated Approvals	03-03-16	LY
E	Updated Terminal Plating	06-22-21	LY

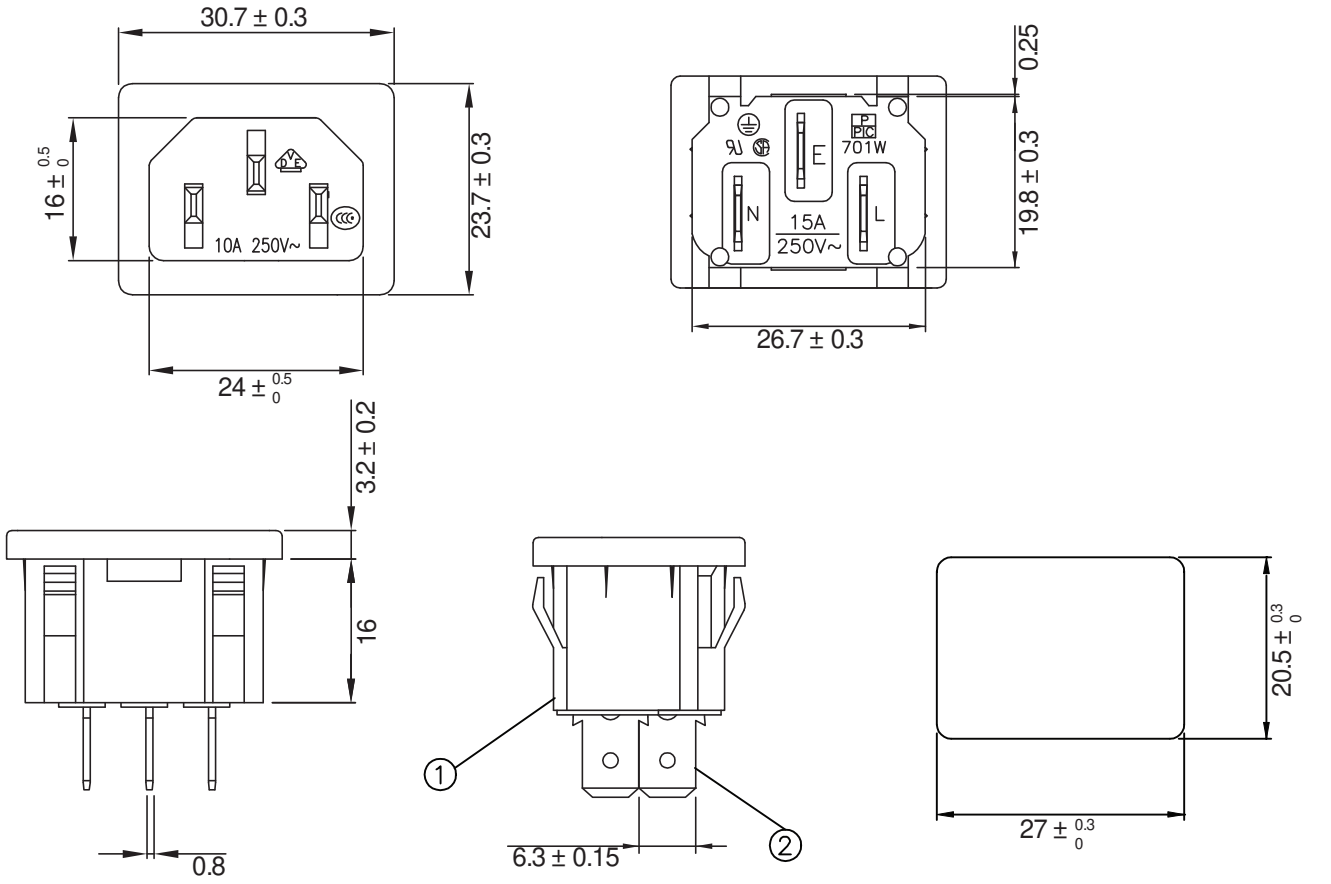

CONTROLLED

NOTES:

RATING:
- UL, CSA: 15A 250V AC
- VDE, CCC: 10A 250V AC

INSULATION RESISTANCE: OVER 100M OHM 500V DC
DIELECTRIC RESISTANCE: 2000V AC ONE MINUTE
PANEL THICKNESS: 0.8mm ~ 1.5mm
APPROVALS: UL, CSA, VDE, CCC
RoHS COMPLIANT

2	Contact PIN Brass Strip Ni-Plated	3
1	Body Insulator Nylon Black Color	1

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
PPC DIVISION

Part Number: 701W-X2/04 RoHS Compliant

Description: AC RECEPTACLE

	UNIT: mm	REV. E
Drawn / Date	Checked / Date	Approved / Date
B.Zhang 05-11-05	05-11-05	JJH / 05-11-05