


DESCRIPTION: FEMALE - DIP SOLDER - MACHINED - ECONOMY- IP67

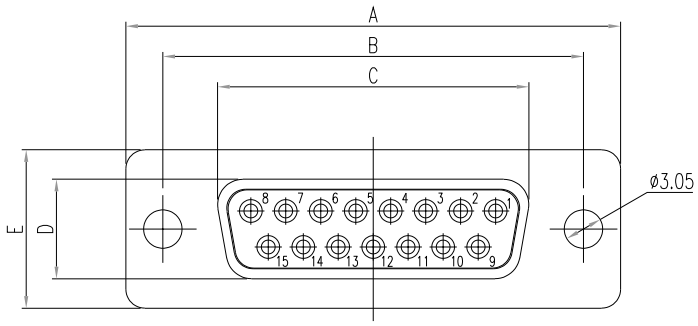

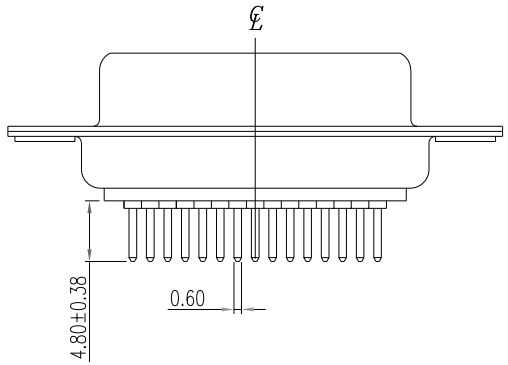

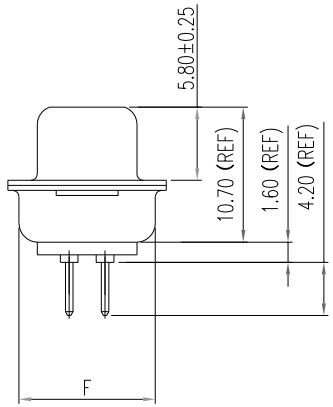

DIMENSIONS(mm)						
SIZE	$A^{+0.39}_{-0.39}$	$B^{+0.25}_{-0.25}$	$C^{+0.25}_{-0.25}$	$D^{+0.25}_{-0.34}$	$E^{+0.38}_{-0.38}$	$F^{+0.25}_{-0.25}$
9	30.81	24.99	16.33	7.90	12.55	10.80
15	39.19	33.32	24.66	7.90	12.55	10.80
25	53.04	47.04	38.38	7.90	12.55	10.80

SPECIFICATIONS:

MATERIALS:

INSULATOR:	GLASS-FILLED NYLON THERMOPLASTIC, UL94 V-0
PROCESS TEMP:	260°C
CONTACTS:	GOLD PLATED BRASS
SHELL:	NICKEL PLATED STEEL
SEALING MATERIAL:	F04 FLEXIBLE ADHESIVE

ELECTRICAL:

RATED CURRENT:	5A
WORKING VOLTAGE:	250VAC
INSULATION RESISTANCE:	1000 MOhms MIN.
CONTACT RESISTANCE:	15 mOhms MAX.

ENVIRONMENT:

OPERATING TEMPERATURE:	-55°C TO +125°C

MEETS IP67 STANDARDS

(SEE PAGE 3 FOR SEALING DETAILS)

772-EYY-213RYY1

SERIES

POSITIONS
- 09
- 15
- 25

GENDER
- 2 = FEMALE

TERMINATION
- 1 = DIP SOLDER

SHELL PLATING
- 3 = NICKEL

HARDWARE OPTIONS
- 00 = NO HARDWARE
- 01 = 0.065" CLINCH NUT, BOARD SIDE
- 05 = 0.237" 4-40 BOARD LOCK, BOARD SIDE

PLATING OPTIONS
- 1 = GOLD FLASH
- 2 = 30u" GOLD
- 3 = 50u" GOLD

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: P. JENKINS

DATE: 09/04/2008

NorComp


SCALE: NTS

SHEET 1 OF 3


REV 14

DWG NO. 772-EYY-213RYY1


DESCRIPTION: FEMALE - DIP SOLDER - MACHINED - ECONOMY- IP67

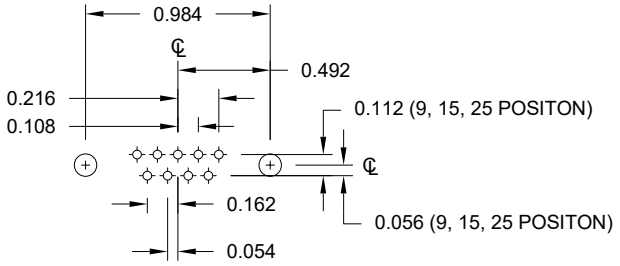

9 POSITION

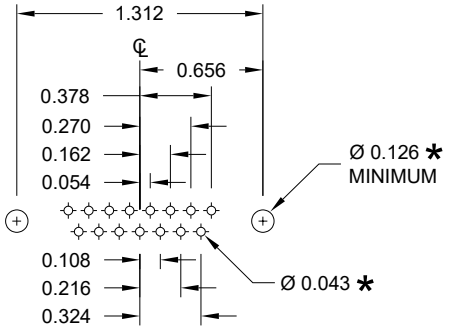

15 POSITION

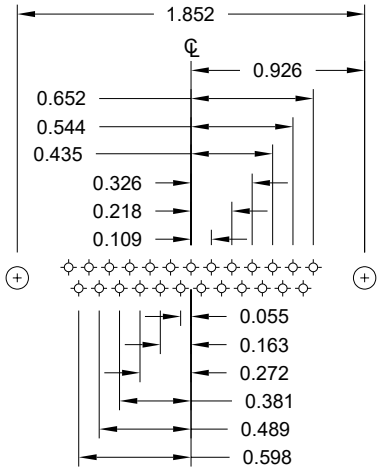

25 POSITION

* TYP.
SUGGESTED SIZE
MAY NOT BE SUITABLE FOR ALL APPLICATIONS

RoHS COMPLIANT

UNITS = inch

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	DATE:
P. JENKINS	09/04/2008


NorComp


SCALE:	SHEET	OF	REV
NTS	2	3	14

DWG NO. 772-EYY-213RYY1

DESCRIPTION: FEMALE - DIP SOLDER - MACHINED - ECONOMY- IP67

SEALING PROCESS

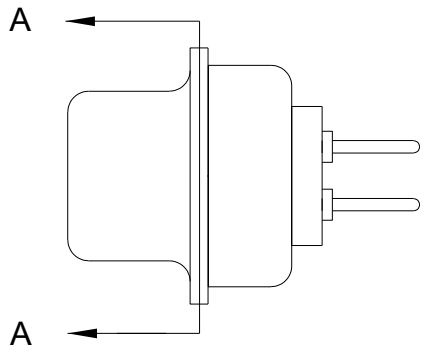


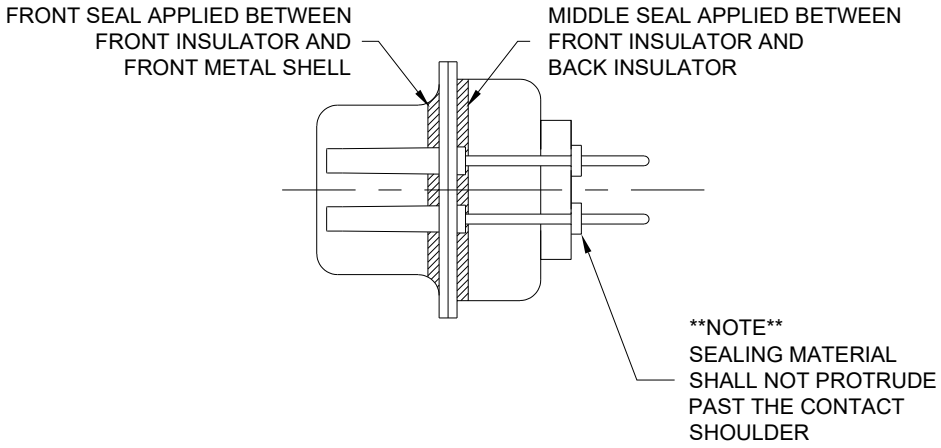


DETAIL A-A

HARDWARE OPTION

01X ..... 0.065" (BOARD SIDE)

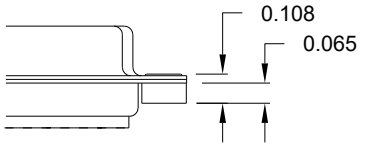

05X ..... 0.237" (BOARD SIDE)

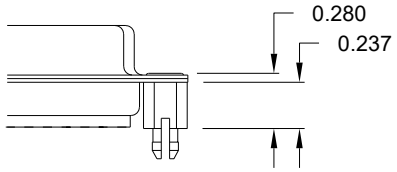

RoHS COMPLIANT

UNITS = inch

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	P. JENKINS
DATE:	09/04/2008

NorComp

SCALE: NTS	SHEET 3 OF 3	REV 14
DWG NO. 772-EYY-213RYY1		