


PART NO.	A97011-031	REV	ECO	DATE	APP
		A	102055	11-04-15	TLM

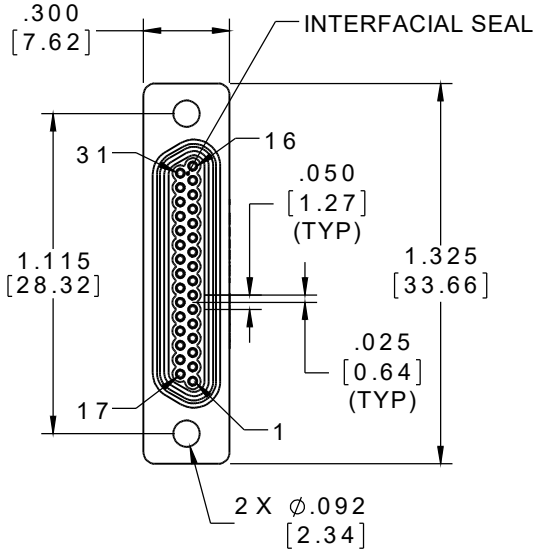

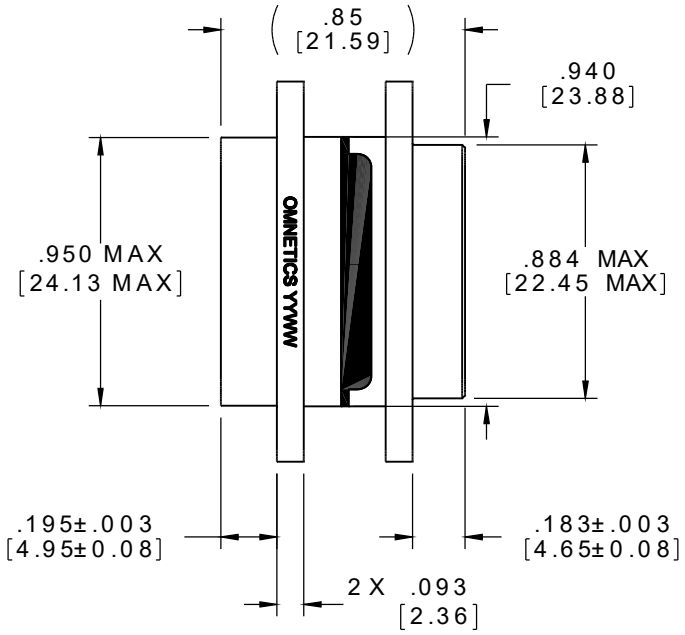

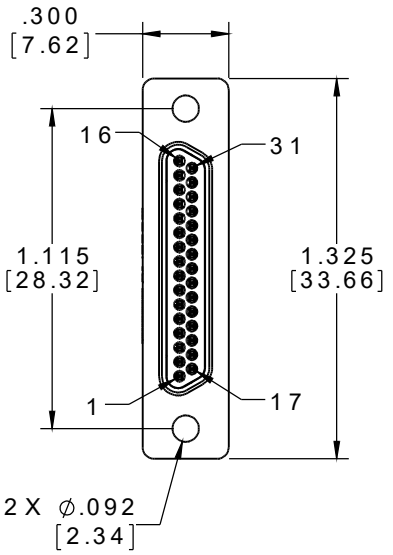

MATERIALS


HOUSING:
ALUMINUM 6061-T6, NICKEL PLATE PER SAE-AMS-2404


INSULATOR:
LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138


MALE CONTACT:
BERYLLIUM COPPER PER ASTM B194, C17200, GOLD PLATED PER ASTM B488, (HARD GOLD) TYPE II CODE C, CLASS 1.27

FEMALE CONTACT:
COPPER ALLOY PER MIL-DTL-83513, GOLD PLATED PER ASTM B488, (HARD GOLD) TYPE II CODE C CLASS 1.27

INTERFACIAL SEAL:
SILICONE RUBBER PER A-A-59588



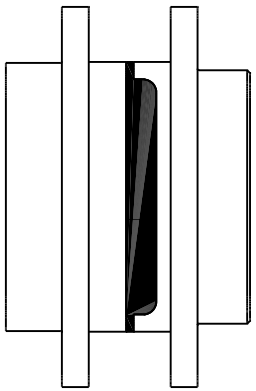



ACTUAL SIZE

NOTE:

DIMENSIONS IN [ ] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

MMDZ / SLDW	THIRD ANGLE -TOLERANCES- UNLESS OTHERWISE NOTED DIMENSIONS IN INCHES 2 PL DEC± .01 3 PL DEC± .005 4 PL DEC± .0005 ANGLES ± 1°	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.	DFTM. HV / DATE 11-03-15 CHK'D. / DATE APP'D. / DATE	TITLE: (31) POSITION MICRO-D CONNECTOR SAVER	OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873 DWG NO. A97011-031 SHEET 1 OF 1 / REV A SCALE: 3:2