

REV	ECRN	DATE
1	NEW PRODUCTION	20190709

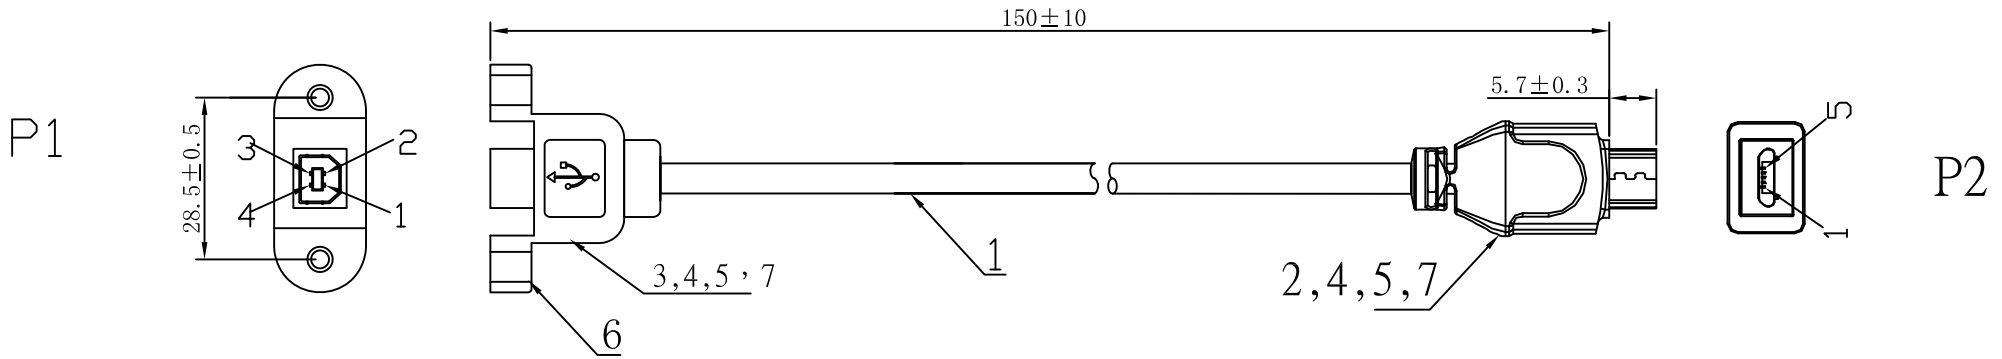

PIN WIRING

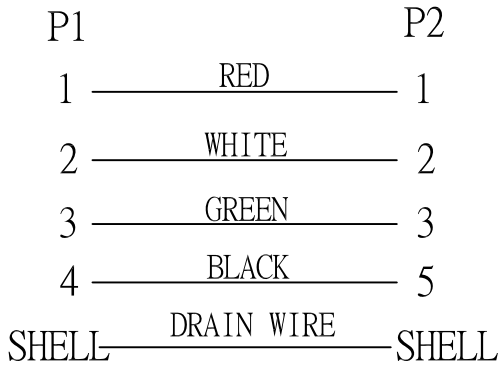

模具编号：P-42 P-43 P-44

NOTES:
1.ELECTRICALTEST:100%OPEN,SHORT&MIS WIRE TEST.
2.CONTACT RESISTANCE:2 ohm,
3.INSULATOR RESISTANCE:10 ohm.
4.HIGH VOLTAGE:DC 300V 0.01sec.
5.MUST BE ROHS COMPLIANT.

NO.	PART NO	ITEM	DESCRIPTION	Q'TY	UNIT
⑦	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	2.5	G
⑥	G.035523.3100R	SCREW	M3 NUT	2	PCS
⑤	C.000000.0000R	MOLDING	PE	4.5	G
④	C.045P06.0100R	MOLDING	PVC 45P GREEN(PANTONE:GR515)	11.5	G
③	B.01004F.0N01R	CONNECTOR	USB B/F 4PIN GOLDED PLATED SHELL NICKEL PLASTIC:WHITE	1	PCS
②	B.02005M.0N06R	CONNECTOR	MICRO USB-B 5PIN GOLDED PLATED SHELL NICKEL PLASTIC:BLACK	1	PCS
①		CABLE	UL2464 28AWG(7/0.12TC)*1P+28AWG(7/0.12TC)*2C+AL+B(32/0.10CCS) JACKET PVC 60P BLACK OD:4.0±0.1MM L=150MM	1	PCS

RoHS COMPLIANT

DRAWN BY		20190709
CHECKED BY		
APPROVED BY		

朋联电子有限公司
DongGuan PengLian Electronics Co.,Ltd
TEL:076938835098/38835095 FAX:076938835091

比例: FREE	TITLE:MICRO USB B/M TO USB B/F带耳朵
單位: mm	SUPPLIER`S ITEM: 9.00ACCA2516.000R
	CUSTOMER: SPARK FUN
	CUSTOMER`S ITEM:
	DRAWING NO. ACCA-2516 DATE 2019.07.09