

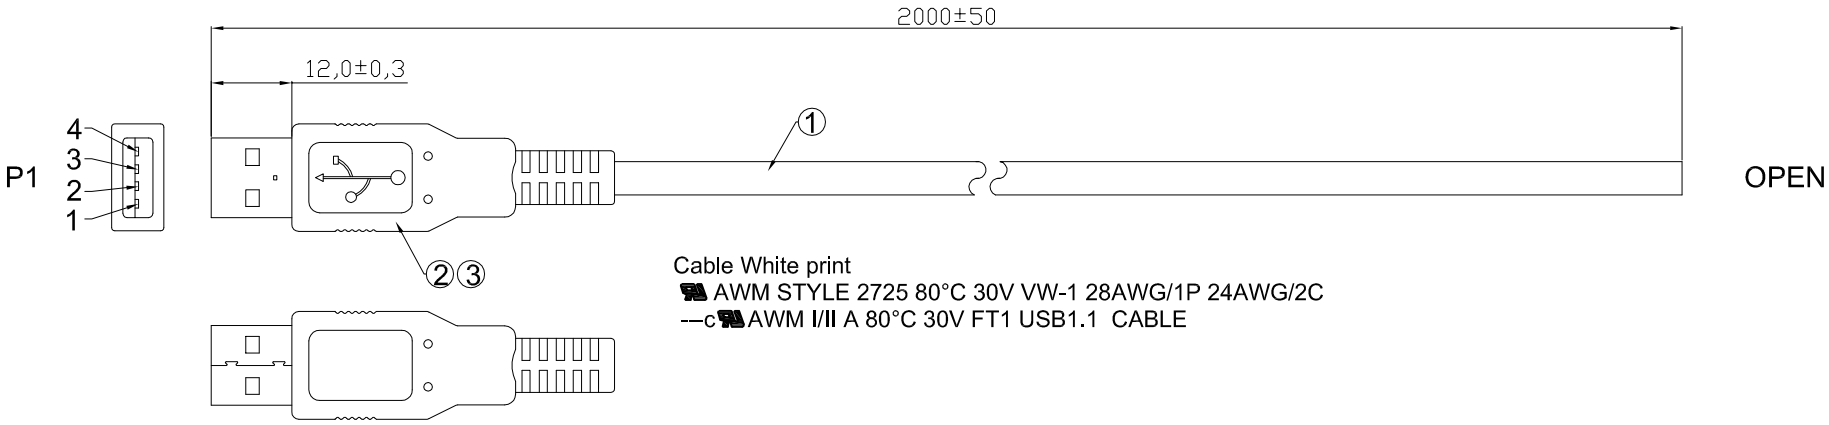


Cable White print
AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
--c AWM I/II A 80°C 30V FT1 USB1.1 CABLE

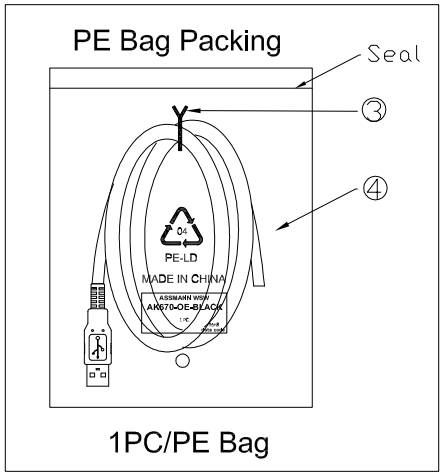

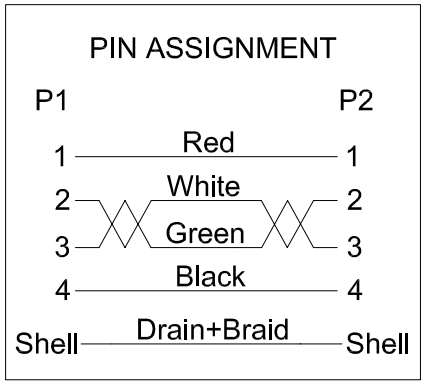

Electrical test:
1. 100% short, open, miss wire test
2. Conduct resistance: 2 Ohm max.
3. Insulator resistance: 5MΩ min.
4. Dielectric test: DC 300V

NO.	NAME.	Q'TY	SPECIFICATION
⑤	PE Bag	1	Clear Print black "MADE IN CHINA"+ "1PC"
④	TIE	1	Black
③	Out Jacket	NA	Black PVC-45P
②	CONN	1	USB A Male Shell:Nickel Pin:G/F Insulator color:White
①	Cable	1	USB1.1 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Black

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
⓪	Drawn	09.05.2016	Amy

	Date	Name
Drawn	09.05.2016	Amy
Approved	09.05.2016	Amy

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AK670-OE-BLACK

Drawing-No.
ASS 7643 CA

rev00

Replace

Sheet