



| SIGN | DATE | DESCRIPTION | APPROVER |
|---|---|---|---|
| | 2019.10.02 | Updated current rating and added UL material rating | |
| | | | |
| | | *THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!* | |

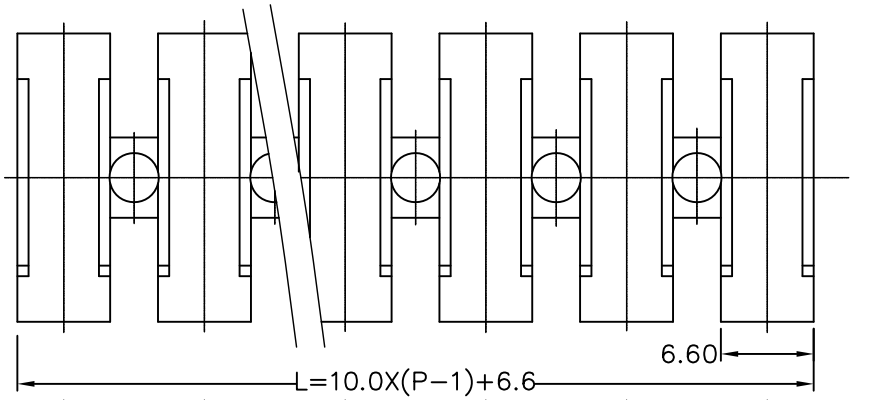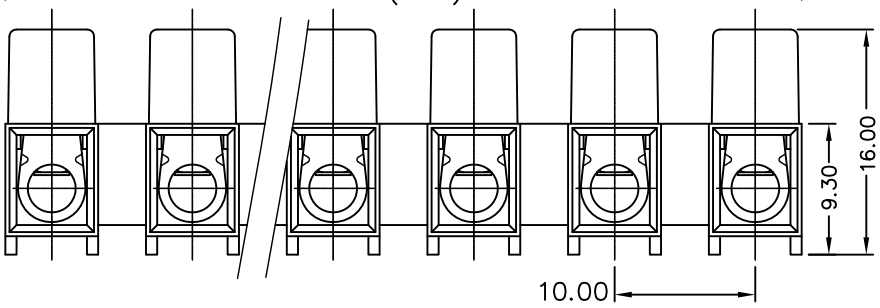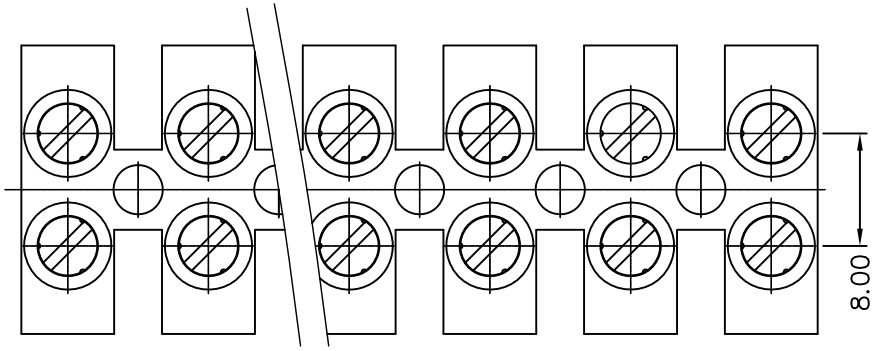


NOTES:
1. Rating: 300V 30A(UL94-V0)
2. Insulation Withstanding Voltage: AC2000V/MIN
3. Insulation Resistance: ≥500MΩ or more at DC500V
4. Temperature Range: -33° C/+105° C
5. Screw Torque Vlaue: 4.5 lbf-in(UL)
6. Wire Range: 12-20AWG
8. Housing: Nylon PA66 (UL-94V0)
9. Screw M3, Steel, Zinc Plated
10. Standard Color: Natural
11. Wire Protector Material: Stainless Steel without plating
12. Terminal: Brass with Ni plating

Agency Approvals: cULus VDE

RoHS Compliant

| DIM \ P | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| L | 16.6 | 26.6 | 36.6 | 46.6 | 56.6 | 66.6 | 76.6 | 86.6 | 96.6 | 106.6 | 116.6 |
| TOL(±) | 0.08 | 0.12 | 0.16 | 0.20 | 0.24 | 0.28 | 0.32 | 0.36 | 0.40 | 0.44 | 0.48 |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.

| | | | | | |
|---|---|---|---|---|---|
| TITLE | ES1000 Series - 10.0mm Euro Strip, Wire guard, flat base | | | | |
| PART NO. | ES1000/XXDSFB(xx - number of poles per row) | | | DWG NO. | ES1000/XXDSFB.DWG |
| APPROVED | CHECKED | DESIGNED | DRAWN | 5020 | Tolerance |
| KSZ 2007.08.01 | KSZ 2007.08.01 | KSZ 2007.08.01 | KSZ 2007.08.01 | UNIT: mm<br>SCALE: NONE<br>SHEET: 01/01<br>REV.: A | .X ±0.15<br>.XX ±0.075<br>.XXX ±0.05 |