FUS008U-9000-0 MICRO SIM CONNECTOR
8 PINS, CLAM-SHELL, STANDARD R/A MOUNT SMT

SPECIFICATIONS:
Insulation Resistance: 500MΩ min. at 500V DC
Withstanding Voltage: 250Vrms for 1min
Voltage Rating: 5Vrms DC
Current Rating: 0.5A
Contact Resistance: 100mΩ max. at 20mV max.
Operating Temp.: - 25°C ~ +85°C
Mating Cycle: 3,000 times

PART NUMBER:
FUS008U-9000-0

Series Name


8 Pins Micro SIM Card Connector


MATERIALS AND FINISH:
- Contacts: PB
- Metal Shell: Stainless Steel
- Insulator: LCP

FEATURES:
- Clam-Shell locking mechanism
- R/A standard SMT mount
- RoHS and REACH Compliant



OUTLINE DIMENSIONS (mm):

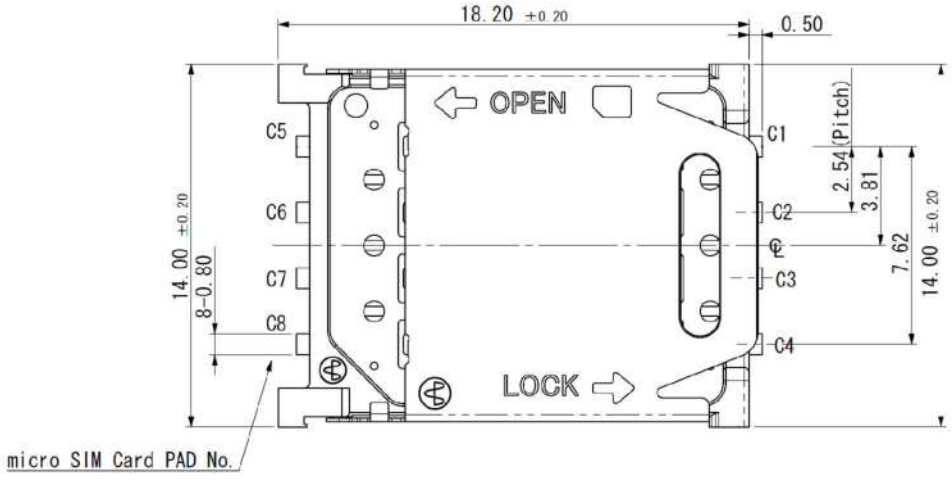

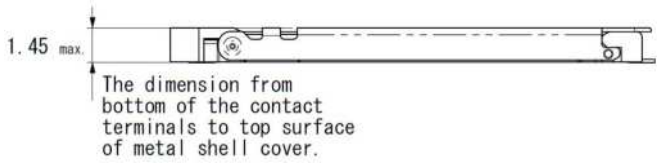

© 2020 Yamaichi Electronics USA Incorporated. All brand or product names may be trademarks of their respective companies.

Yamaichi Electronics USA Inc.
Visit Us @ WWW.YEU.COM
Email: Info@yeu.com
TEL: 408-715-9100

DISCLAIMER: PRODUCT DATA & DIMENSIONS ARE SUBJECT TO CHANGES WITHOUT NOTICE