



REV	ECN	APP'D
-	3709	JC 3/26/99
A	5252	JT 6/5/03
B	5460	JT 5/24/04
C	5579	JT 01/06/05
D	5582	

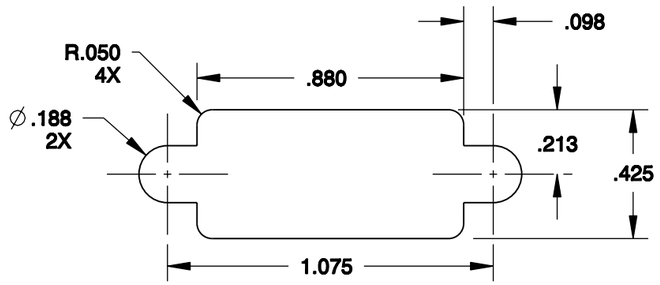


RECOMMENDED MOUNTING
PANEL HOLE

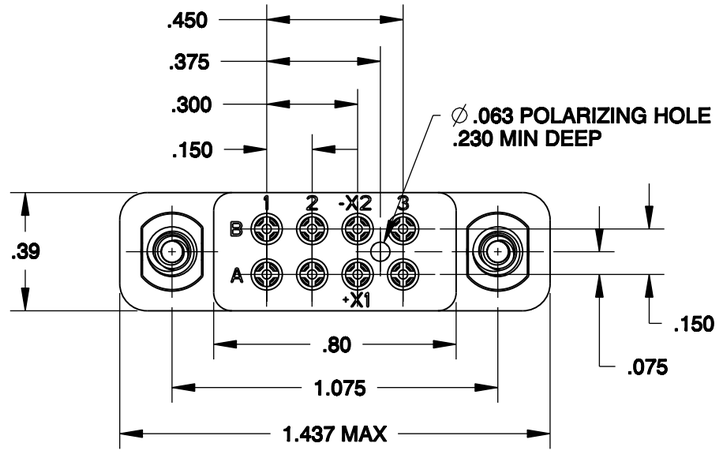


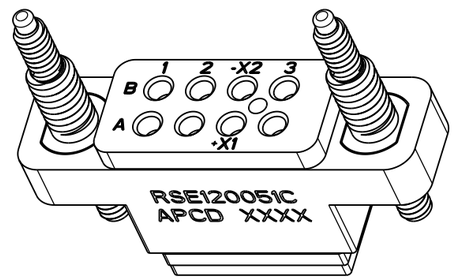

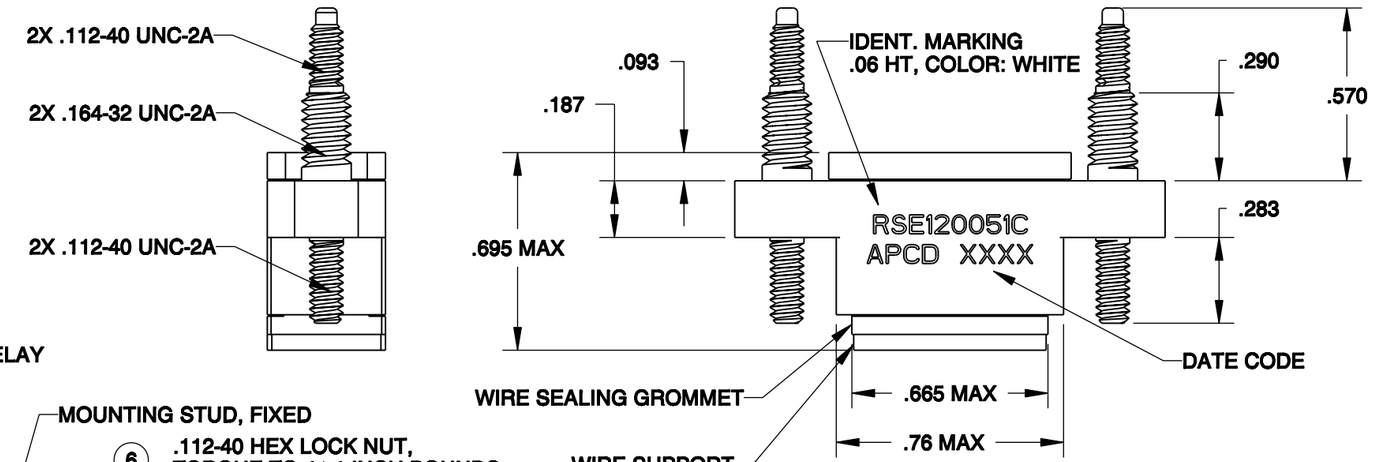

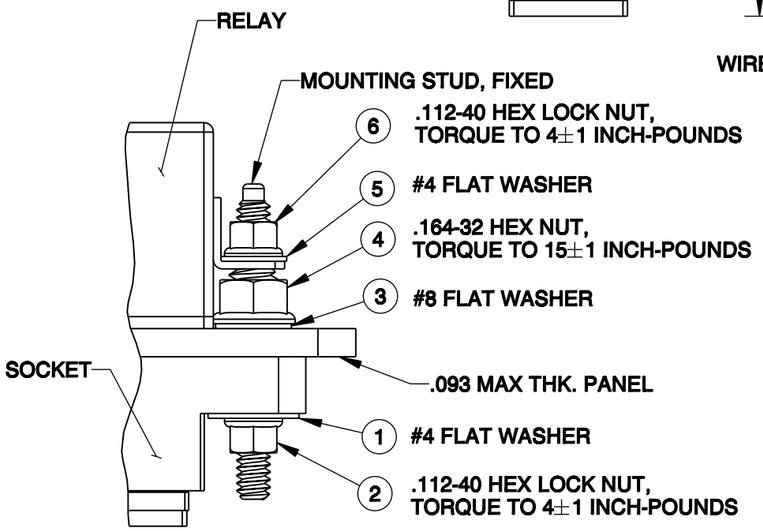

MOUNTING HARDWARE
INSTALLATION SWQUENCE BY ITEM NUMBER
TYP 2 PLACES

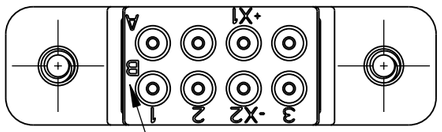

NOTES:
1. CONFORMS TO PERFORMANCE REQUIREMENTS OF MIL-S-12883.
2. MATERIALS:
   HOUSING AND WIRE SUPPORT: POLYETHERIMIDE
   COLOR: BLUE-GREEN
   GROMMET: SILICONE ELASTOMER, COLOR: RED
3. COMPLETE MOUNTING HARDWARE SUPPLIED PER TABLE.
4. SOCKET CONTACTS SUPPLIED PER TABLE.
5. OPERATING TEMPERATURE: +125° C / -65° C CONTINUOUS.
6. CONTACT INSTALLATION TOOLS:
   CRIMP TOOL: M22520/7-01
   POSITIONER: M22520/7-12
   INSERTION/REMOVAL: M81969/16-01

BILL OF MATERIALS

APCD P/N	DESCRIPTION	QTY.
200003801	HEX NT SLF-LCKG 4-40 #704	4
200000401	FLT WSHR #4 SPCL #706	2
200007201	HEX NUT SLF-LCKG #8-32	2
200004001	FLT WSHR #8 PSVTD #501	2
200002801	FLT WSHR #4 PSTVD #504	2
CNS101553	M39029/101-553 CONTACT SZ20/20	8

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±2.0°	PROJECTION	Amphenol Pcd *SPECIFICATION DRAWING* ENGR A. PATRIE 03/25/99	TITLE RELAY SOCKET, EMBRAER, 2- POLE, 8 POSITION, 5-AMP, SIZE 20
ORIGINAL	*THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA*		CHKD J. RUTKOWSKI APPD J. TON 06/05/03	SIZE B · DWG NO. RSE120051C · REV D CODE: 58982 · SCALE: 2:1 · SHEET 1 OF 1

RSE120051C
RSE120051C