Wiha TorqueControl Adapters

Adapters For TorqueFix™ & TorqueVario™



285 81 Bit Holder Adapter For 1/4" Drive Bits

Shaft CVM steel, hardened, corrosion protected.

Item No.	Size	mm	mm	lbs.	pkg.
285 81	1/4	149	4.0	.09	1

SHOP

See pages 185-197 for Insert bits



285 82 Square Drive Adapter For 1/4" Sockets

Shaft CVM steel, hardened, corrosion protected.

Item No.	Size	mm	mm	lbs.	pkg.
285 82	1/4	145	4.0	.08	1

SHOP

See pages 211-215 for Sockets



285 83 Adapter Blade For Wiha 4 mm MicroBits

Shaft CVM steel, hardened, corrosion protected.

Item No.	Size	mm	mm	lbs.	pkg.
285 83	4.0	149	4.0	.09	1

SHOP

See pages 159-160 for Micro bits




288 82 ESD Safe Bit Holder Adapter For 1/4" Drive Bits

Shaft CVM steel, hardened, corrosion protected.

Item No.	Size	mm	mm	lbs.	pkg.
288 82	1/4	162	4.0	.09	1

SHOP

See pages 185-197 for Insert bits

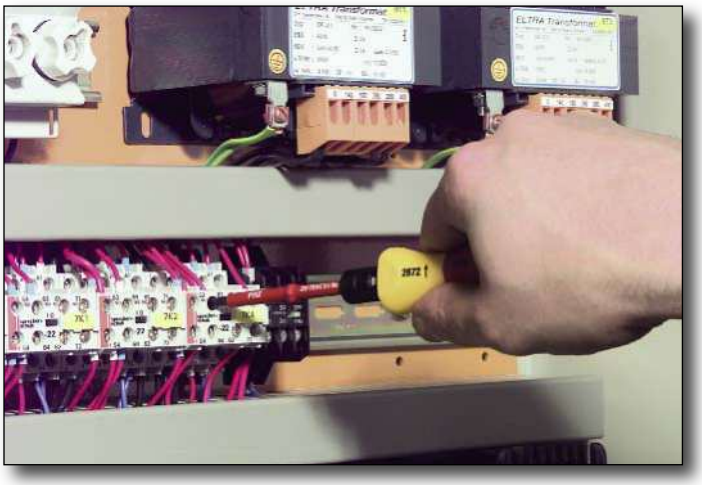

See Insulated Tools On Pages 87-110

Wiha Insulated TorqueControl Tools



Includes Certificate

1000V

SHOP

285 Insulated TorqueVario-S, With Window Scale Insulation

up to 1000 Volt. EN 60900, VDE, ASTM F-1505, NFPA

EN ISO 6798, BS EN 26789, ASME B107.14M, VDE, ASTM F-1505-01 & NFPA70E, +/- 6% Accuracy Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained.

Item No.	Range Inch	lbs.	Increments	mm	lbs.	pkg.
285 14	7.5 -	20	.5 Inch lbs	126 - 131	.43	1
285 16	10 -	50	2 Inch lbs	133 - 138	.40	1
285 20	20 -	70	2 Inch lbs	137 - 142	.69	1

Each TorqueVario handle has unique serial number and certificate of calibration

10,000 Volt Tested



SHOP

287 Insulated Slotted Interchangeable Blades For TorqueVario-S

Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum tool steel, hardened. VDE Insulated.

Item No.	mm	Inch	mm	lbs.	Max. Torque Nm	pkg.
287 01	3.0	.118	190	.07	0.6	1
287 03	3.5	.139	190	.07	1.1	1
287 05	4.0	.157	190	.07	2.5	1
287 07	5.5	.216	190	.07	3.8	1

These Insulated Blades work in Insulated handles only

10,000 Volt Tested



SHOP

287 Insulated Phillips Interchangeable Blades For TorqueVario-S

Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum tool steel, hardened. VDE Insulated.

Item No.	Size	mm	mm	lbs.	Max. Torque Nm	pkg.
287 10	0	190	4.0	.07	0.9	1
287 11	1	190	4.0	.07	3.8	1
287 12	2	190	4.0	.07	5.5	1

These Insulated Blades work in Insulated handles only