Rev	AWO #	Description	Date	Appr
-		RELEASED	10/13/15	
A		ADDED 1FT PART NUMBER	5/3/19	AY/TW

APPROVED: _____

DATE: _____ TITLE: _____

CUSTOM CABLE ASSEMBLIES ARE NON-CANCELLABLE/NON-RETURNABLE

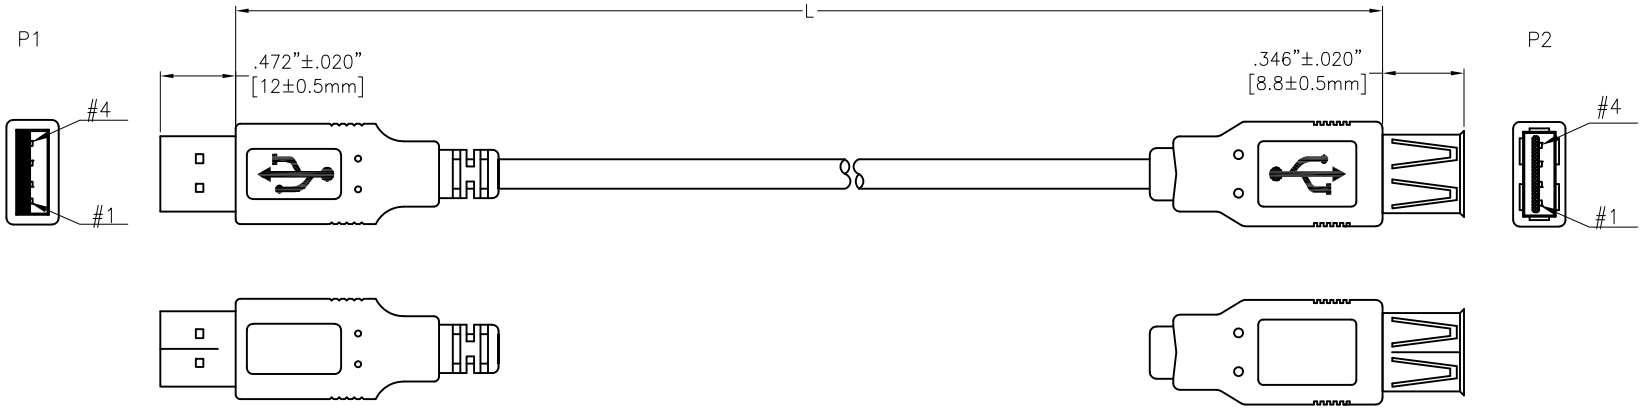

PIN ASSIGNMENT

P1		P2
1	RED	1
2 — WHITE		WHITE — 2
3 — GREEN		GREEN — 3
4	BLACK	4
SHELL	BRAID	SHELL

ADAM P/N	L
CA-USB-AM/AF-1FT	12.008"±.787" [305±20mm]
CA-USB-AM/AF-3FT	36.024"±1.181" [915±30mm]
CA-USB-AM/AF-6FT	72.047"±1.969" [1830±50mm]
CA-USB-AM/AF-10FT	120.079"±1.969" [3050±50mm]

SPECIFICATIONS:

Connector:

P1= USB Connector 2.0 A Type Plug, Insulator Color: White, Overmold Color: Black, 50P PVC

P2= USB Connector 2.0 A Type Socket, Insulator Color: White, Overmold Color: Black, 50P PVC

Cable:

UL2725, (1P+2C)+A+B, OD: .189" [4.8mm] (28/24),Jacket Color: Black .

Electrical Test:

All Assemblies must be 100% Tested for
Shorts, Open, Continuity, and Physical Appearance.

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	10/13/15
CHECKED	TW	10/13/15
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: CUSTOMER ASSEMBLY, USB 2.0 PLUG TYPE A TO USB 2.0 SOCKET TYPE A

SIZE	PART NO.	REV.
X	CA-USB-AM/AF-XFT	A

REF: S00087T | SCALE: NTS | SHEET 1 OF 1