

CAT5-1000 CAT5E UTP Cable

CAT5E 4-Pair UTP 24AWG Solid Bare Copper PVC Jacket 1000ft

Features:



- High-Performance Data Cable
- CAT5E Unshielded Twisted Pairs
- Easily Identified Color-Striped Pairs
- 24AWG Solid Copper Conductors
- TIA/EIA-568.C.2, ISO/IEC 11801
- Not for outdoor use

Applications:

- IEEE 802.3: 1000Base-T; 100Base-T; 10Base-T
- IEEE 802.5: 4/6 Mbps Token Ring
- Structure Cabling, 155Mbps ATM, ISDN
- Gigabit Ethernet

Specifications

DC resistance	Max 9.38 Ω / 100m
Rated Voltage	30V
Reference Standard	EIA/TIA 568 & ISO/IEC 11801
Conductor Material	Solid Bare Copper
AWG	24AWG
Conductor Diameter	4 x 2 x 1/0.5 $\pm$ 0.01mm
Insulation	HDPE
Material	PE
Average Thickness	0.21 $\pm$ 0.01 mm
Insulation Diameter	0.90 $\pm$ 0.01mm
High Twisted & Ripcord	Yes
Jacket	PVC
Average Thickness	0.63mm
Outer Diameter	5.2 $\pm$ 0.01mm

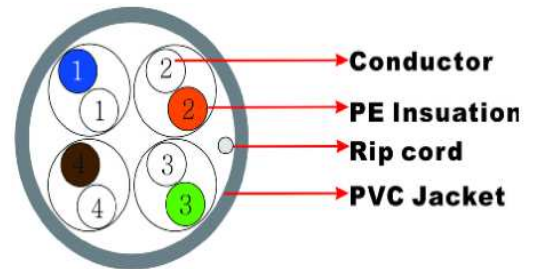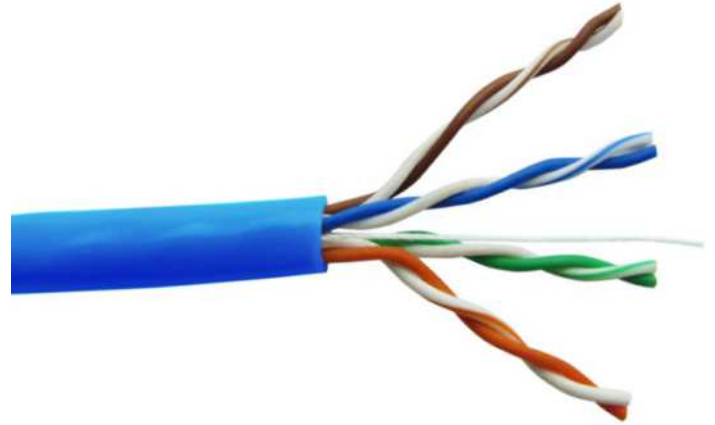

Color of Pairs

Pair 1	Blue	White-Blue
Pair 2	Orange	White-Orange
Pair 3	Green	White-Green
Pair 4	Brown	White-Brown

Ordering Information:

Model	Length	Color
CAT5-1000-BL	1000ft (305m), Pull Box	Blue

