
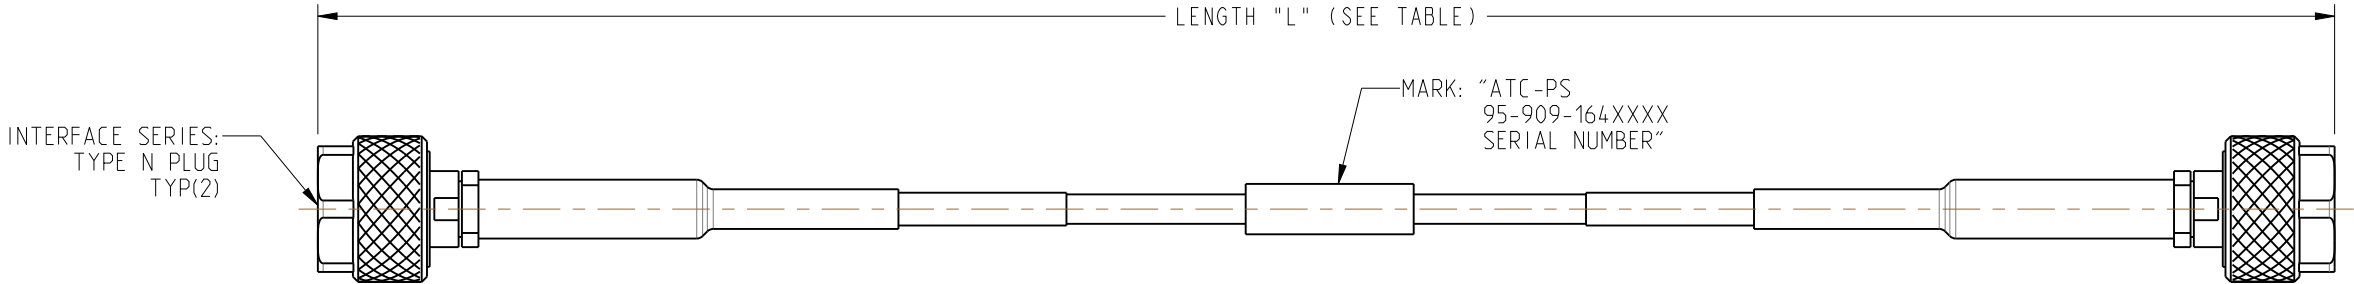


NOTES:

1. MATERIALS AND FINISHES:
BODIES, COUPLING NUT - STAINLESS STEEL, PASSIVATED
CONTACT - BERYLLIUM COPPER, GOLD PLATED
RETAINING RING - STAINLESS STEEL
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHMS
B. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN
C. PHASE STABILITY: 4.6° MAX
D. AMPLITUDE STABILITY: 0.15 dB MAX
3. MECHANICAL:
A. DURABILITY: 5000 CYCLES MIN
B. TEMPERATURE RANGE: -55°C TO 200°C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED:
"AMPHENOL RF, 95-909-164XXXX, AND DATE CODE"
C. CONTENTS: CABLE ASSEMBLY, VSWR AND INSERTION PLOT OF INCLUDED CABLE, AND ROHS.

THIRD ANGLE PROJ.

REVISIONS				
REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	07-May-19	11448	BEW



PART NUMBER	LENGTH "L" IN INCHES [METERS]	INSERTION LOSS (MAX)
95-909-164-024	24.00 [0.601]	1.75 dB
95-909-164-036	36.00 [0.914]	2.47 dB
95-909-164-048	48.00 [1.219]	3.18 dB
95-909-164-060	60.00 [1.524]	3.90 dB
95-909-164-072	72.00 [1.829]	4.62 dB
95-909-164M100	39.37 [1.000]	2.71 dB

DESIGN REQUIREMENTS

- ☒ FREQUENCY: DC TO 18 GHz
- ☒ CONTINUITY
- ☒ VSWR: 1.30 :1 MAX
- ☒ HI-POT: 1000 VRMS
- ☒ INS. LOSS: SEE TABLE
- ☐ OTHER

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°	MATERIAL -	DRAWN B.WYMAN	DATE 26-Nov-18	TITLE ATC-PS TEST CABLE TYPE-N PLUG TO PLUG	Amphenol RF www.amphenolrf.com	
		ENGINEER B.WYMAN	DATE 26-Nov-18			
	REFERENCE EAR# 8108 REF: ---	APPROVED K.CAPOZZI	DATE 07-May-19		DRAWING NO. 95-909-164XXXX	
	CONFIGURATION LEVEL: In Work	CAD FILE		SCALE: 0.9:1.0	SHEET 2 OF 2	ITEM NO. 95-909-164XXXX
	FINISH			DWG SIZE B	REV A	PART NO. 95-909-164XXXX

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.