


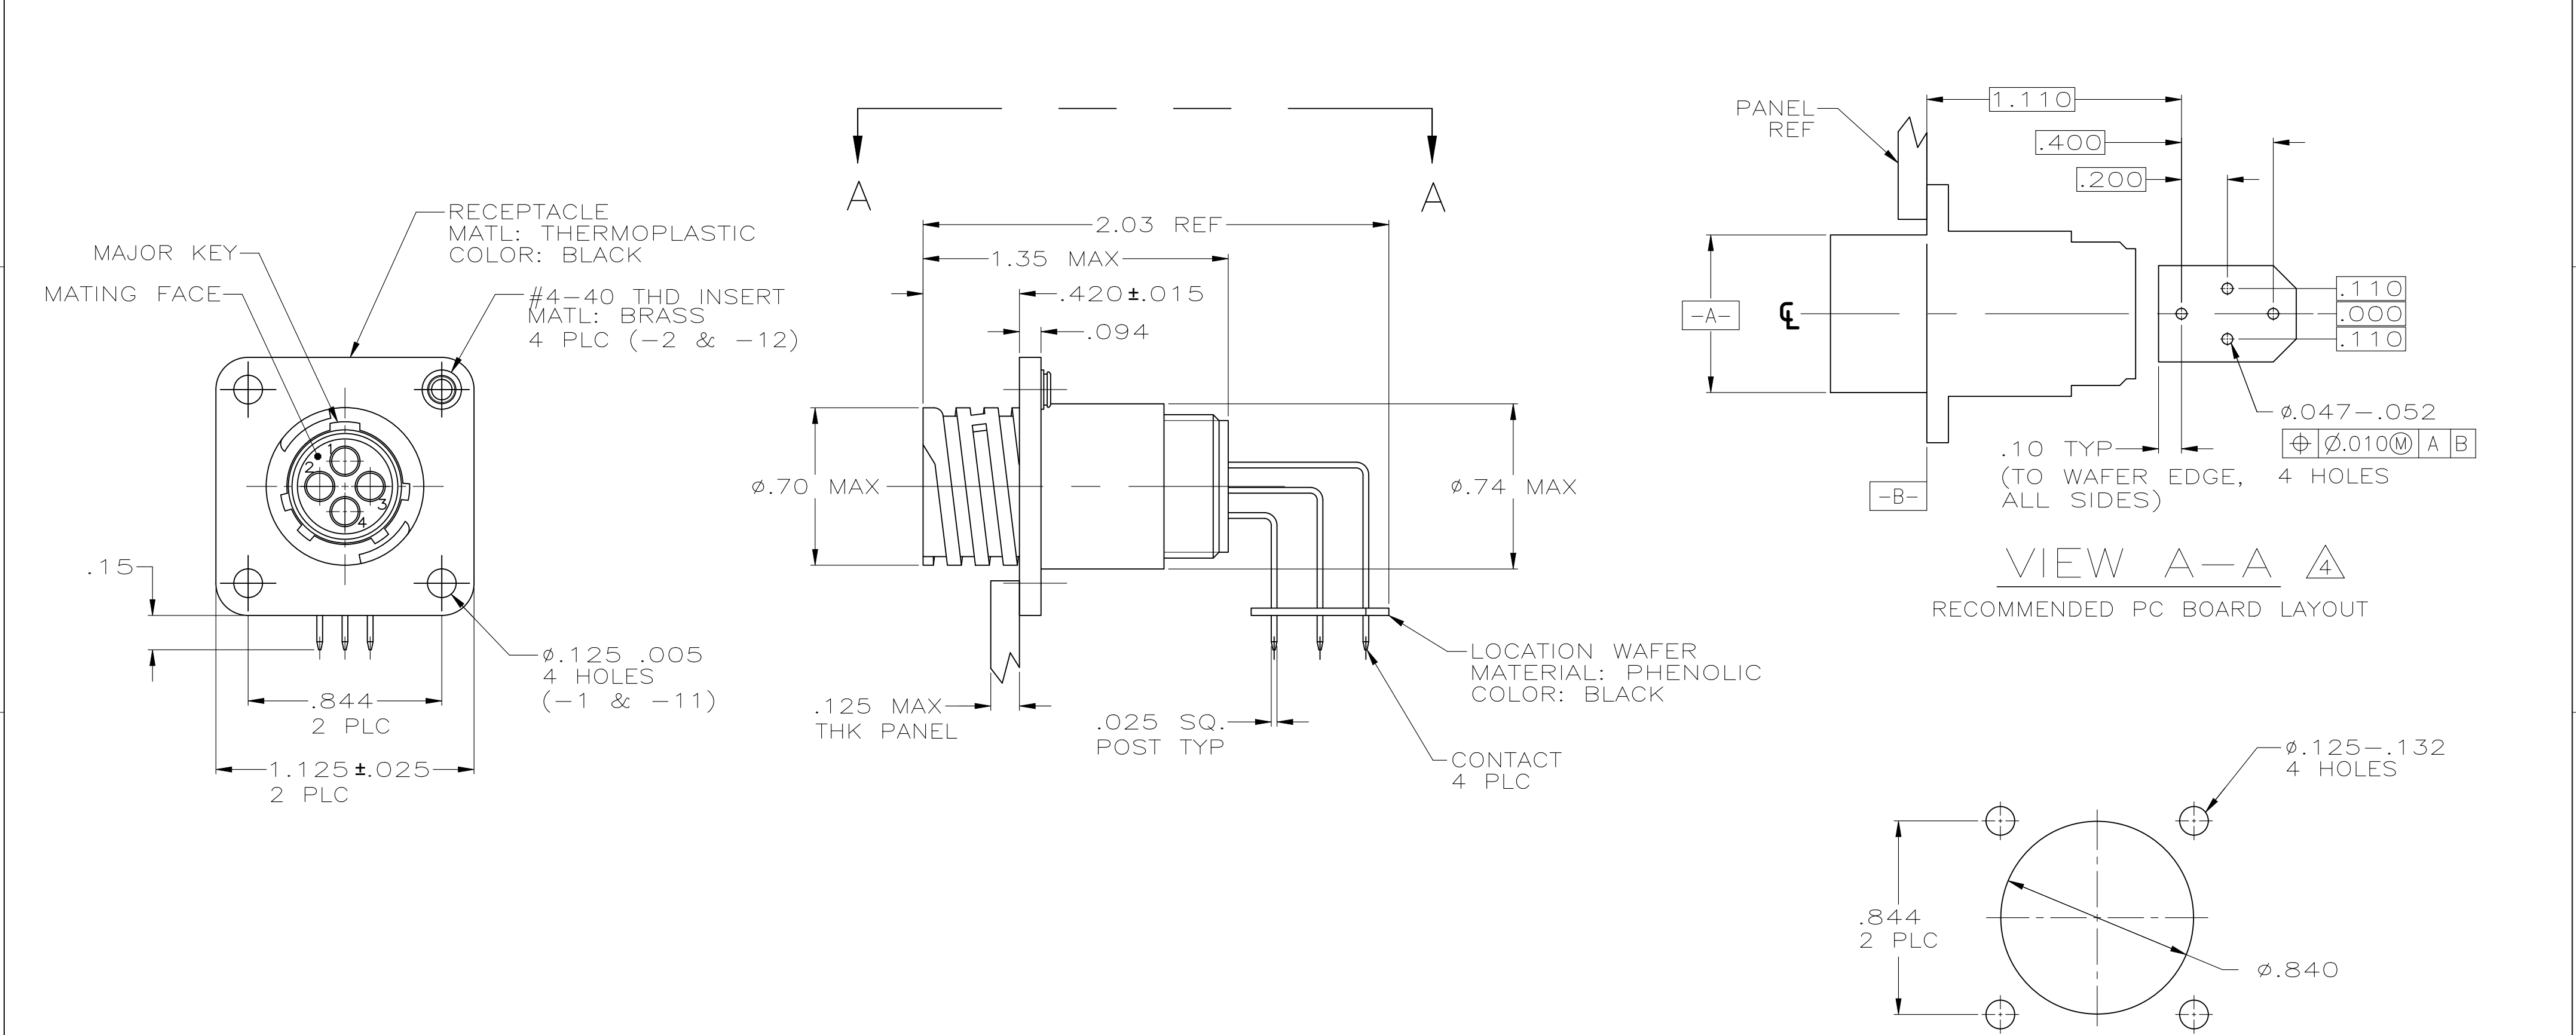

- 1
- CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
- 2
- #4 FASTENER RECOMMENDED FOR -1 MOUNTING.
#4 FASTENER REQUIRED FOR -2 MOUNTING.
- 3
- CONTACT BODY: .000030 MIN GOLD FOR A LENGTH OF .250 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN-LEAD OVER .000100 MIN COPPER.
- 4
- PC BOARD HOLE PATTERN IS DEFINED RELATIVE TO CONNECTOR C.L. AND PANEL MOUNTING FACE INDICATED.
- 5
- CONTACT BODY: .000030 MIN PRECIOUS METAL PLATE FOR A LENGTH OF .250 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN OVER .000100 MIN COPPER.

RECOMMENDED PANEL CUTOUT			
	5	W/INSERTS	1-796403-2
	5	W/O INSERTS	1-796403-1
OBSOLETE	3	W/INSERTS	-796403-2-
OBSOLETE	3	W/O INSERTS	-796403-1-
CONTACT FINISH		CONFIG.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

-

TOLERANCES, UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	.03
3 PLC	±	.010
4 PLC	±	-
ANGLES	±	-
FINISH	-	-

FINISH

-

DWN
HAMNER
2-19-00

CHK
M.CHACKO
2-24-00

APVD
M.CHACKO
2-24-00

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME
RECEPTACLE ASSY, POSTED, RT ANGLE, STD SEX, SIZE 11-4, SERIES 1, CPC

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=796403

RESTRICTED TO
-

SCALE
2:1

SHEET
1 of 1

REV
G