THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 - ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| AD | 00 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | B1 | REVISED PER ECO-15-001494 | 03FEB2015 | AP | DD |
| | B2 | REVISED PER ECN-24-252171 | 21FEB2024 | AP | RS |

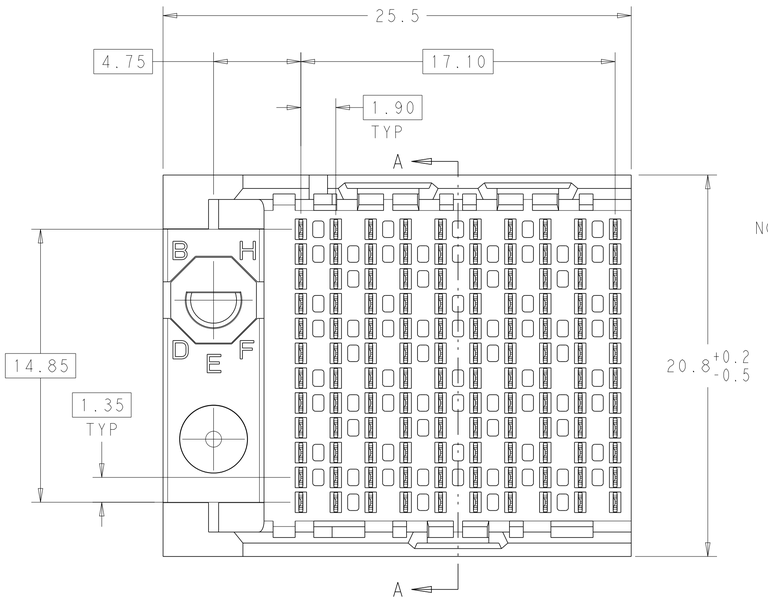


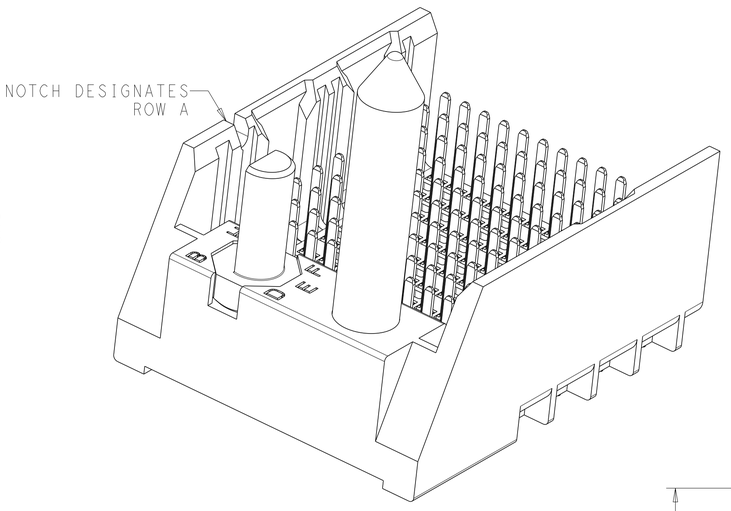


1. MATERIAL:
   HOUSING: LCP, GLASS FILLED, UL94V-0.
   TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
2. FINISH:
   30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
3. SCREWS PACKAGED IN END OF PACKAGING TUBE.
4. FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH, Ø3.66 DRILL, AND Ø6.5 PAD.
5. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART ON SHEET 2 FOR OTHER POSITIONS.

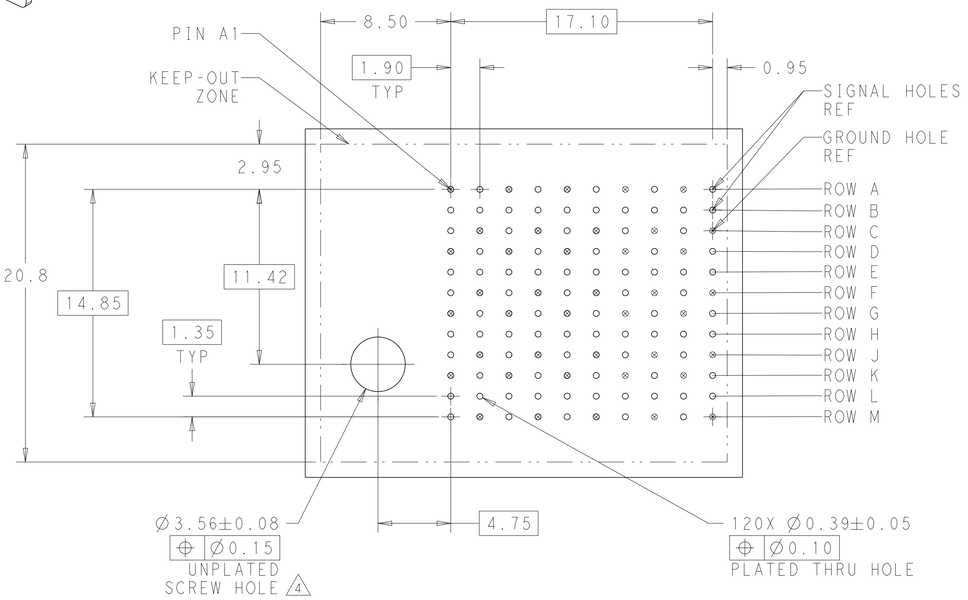


LEFT GUDIED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)

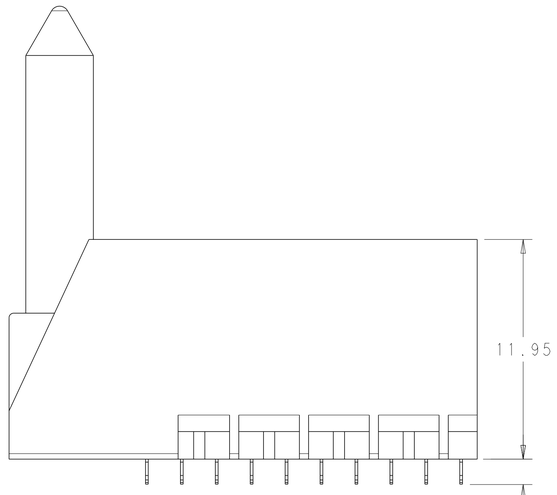


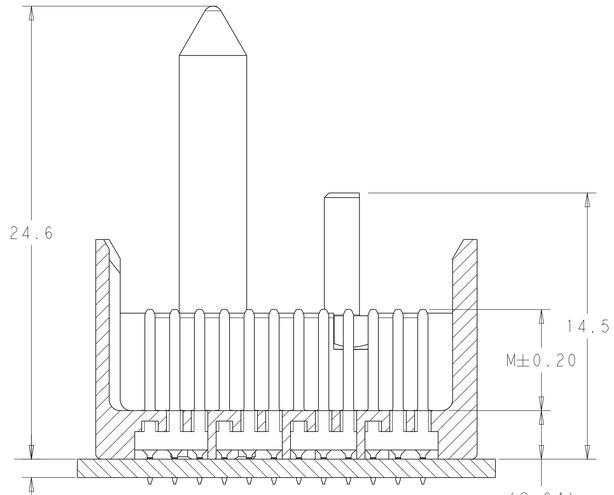


SECTION A-A

| | | | |
|---|---|---|---|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | DWN J.K.SHOBER 26DEC11 | TE Connectivity | |
| DIMENSIONS: mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.25 2 PLC ±0.13 3 PLC ±- 4 PLC ±- ANGLES ±- | CHK J. EABY 26DEC11 | NAME IMPACT, 4 PAIR, 10 COLUMN, HEADER LEFT GUIDED, OPEN END WALL SIGNAL MODULE, 0.39 PTH |
| | | APVD J. EABY 26DEC11 | |
| | | PRODUCT SPEC - | |
| | | APPLICATION SPEC - | SIZE A1 · CAGE CODE 00779 · DRAWING NO C-2007809 · RESTRICTED TO - |
| MATERIAL 1 | FINISH SEE TABLE - | WEIGHT - | |
| | | CUSTOMER DRAWING | SCALE 6:1 · SHEET 1 OF 2 · REV B2 |

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 - ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| AD | 00 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | - | SEE SHEET 1 | - | - | - |

| | | | |
|---|---|---|---|
| 2 | H | 5.5 | 8-2007809-3 |
| 2 | H | 4.9 | 8-2007809-2 |
| 2 | H | 4.5 | 8-2007809-1 |
| 2 | G | 5.5 | 7-2007809-3 |
| 2 | G | 4.9 | 7-2007809-2 |
| 2 | G | 4.5 | 7-2007809-1 |
| 2 | F | 5.5 | 6-2007809-3 |
| 2 | F | 4.9 | 6-2007809-2 |
| 2 | F | 4.5 | 6-2007809-1 |
| 2 | E | 5.5 | 5-2007809-3 |
| 2 | E | 4.9 | 5-2007809-2 |
| 2 | E | 4.5 | 5-2007809-1 |
| 2 | D | 5.5 | 4-2007809-3 |
| 2 | D | 4.9 | 4-2007809-2 |
| 2 | D | 4.5 | 4-2007809-1 |
| 2 | C | 5.5 | 3-2007809-3 |
| 2 | C | 4.9 | 3-2007809-2 |
| 2 | C | 4.5 | 3-2007809-1 |
| 2 | B | 5.5 | 2-2007809-3 |
| 2 | B | 4.9 | 2-2007809-2 |
| 2 | B | 4.5 | 2-2007809-1 |
| 2 | A | 5.5 | 1-2007809-3 |
| 2 | A | 4.9 | 1-2007809-2 |
| 2 | A | 4.5 | 1-2007809-1 |
| 2 | - | 5.5 | 2007809-3 |
| 2 | - | 4.9 | 2007809-2 |
| 2 | - | 4.5 | 2007809-1 |
| FINISH | KEY POSITION | DIM M | PART NUMBER |

OBSOLETE

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

## KEY POSITION CHART

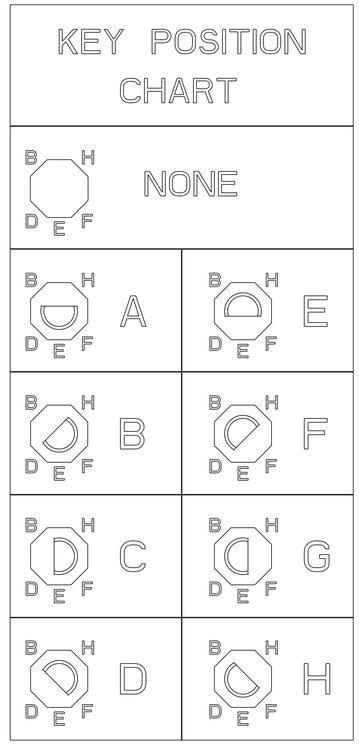


THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.25
2 PLC ±0.13
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL - -

FINISH SEE TABLE -

| | |
|---|---|
| DWN | J.K.SHOBER 26DEC11 |
| CHK | J. EABY 26DEC11 |
| APVD | J. EABY 26DEC11 |
| PRODUCT SPEC | - |
| APPLICATION SPEC | - |
| WEIGHT | - |

TE Connectivity

NAME IMPACT, 4 PAIR, 10 COLUMN, HEADER
LEFT GUIDED, OPEN END WALL
SIGNAL MODULE, 0.39 PTH

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-2007809 | - |

CUSTOMER DRAWING | SCALE 5:1 | SHEET 2 OF 2 | REV B2